



Item#: **55030**
2X2 DIRECT/INDIRECT 2/PL40
FLUORESCENT FIXTURE

FEATURES

- This recessed fixture provides soft ambient direct and indirect lighting with a symmetric center basket.
- The direct and indirect lighting fixture reduces shadows and glare.
- Swing down micro perforated lamp shield for easy re-lamping and maintenance.
- Electronic ballast is standard and available in numerous configurations.

APPLICATION

Ideal for offices, retail, commercial buildings and work areas.

ELECTRICAL

Ballast Brand	Superior Life®
Ballast Configuration	2PL
Lamp Type (not included)	PL40W/2G11
Number of Lamps	2
Voltage	120-277V

ENVIRONMENT

Operating Temperature	-4° ~ 122°F
Suitable Location	DAMP
Ingress Protection Rating	IP40

LIFESPAN

Warranty (Years)	2
------------------	----------

CONSTRUCTION

Housing	24 Gauge C.R.S
Reflector	White Aluminum
Base / Power Supply	Hard Wired
Finish	High Gloss Baked Enamel

QUALIFICATIONS



Operating temperature may vary depending on lamps used. • Specifications are subject to change without notice.

Item#: **55030**
2X2 DIRECT/INDIRECT 2/PL40




DIMENSIONS (Inches)

Length	23.8"
Width	23.8"
Height	5.5"
Net Weight (Lbs)	--

SUPPORTING DOCUMENTS (Grey = not available at this time.)

Product Sheet	VIEW
Install Instructions	VIEW

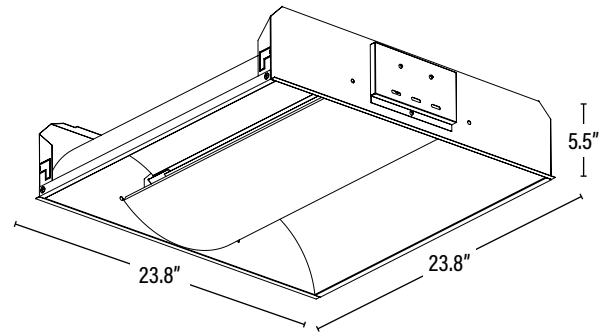

PACKAGING		UPC	DIMENSIONS (LxWxH)	GROSS WEIGHT (Lbs)
Master Carton	1	811768028423	25.2" x 24.3" x 5.7"	9.9
Country of Origin	China			
HS Tariff	9405.10.6020			

ORDERING

ITEM#	DESCRIPTION	CASE
55030	2 X 2 RECESSED DIRECT/INDIRECT FOR 2/PL40/120-277 - SL	1