



WIRING DIAGRAM AND DIMENSIONS

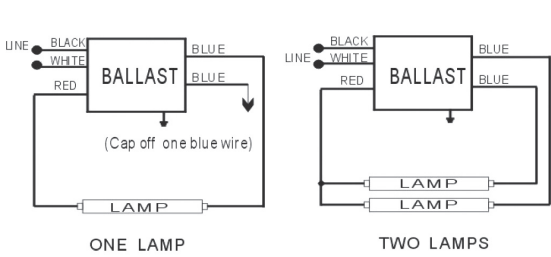

ENCLOSURE



BALLAST TYPE	Electronic
STARTING METHOD	Active Instant Start
LAMP CONNECTION	Parallel
INPUT VOLTAGE	120-277
INPUT FREQUENCY	60Hz



Over All (L)	Width (W)	Height (H)	Mounting (M)
9.5"	1.7"	1.14"	8.9"

ELECTRICAL SPECIFICATIONS AT 120V

Lamp Type	NO. of Lamps	Rated Lamp Watts	Min Start Temp (°F/C)	Input Current (Amps)	Input Power (ANSI Watts)	Ballast Factor	MAX THD %	Power Factor	MAX Lamp Current Crest Factor	BEF
F32T8	2	32	0/-18	0.61	73	1.18	10	0.99	1.7	1.62
F32T8	1	32	0/-18	0.38	45	1.37	10	0.99	1.7	3.04
F25T8	2	25	0/-18	0.47	56	1.2	10	0.99	1.7	2.14
F25T8	1	25	0/-18	0.29	35	1.4	10	0.99	1.7	4.00
F17T8	2	17	0/-18	0.35	42	1.23	10	0.99	1.7	2.93
F17T8	1	17	0/-18	0.28	26	1.42	10	0.99	1.7	5.46
F40T8	1	40	0/-18	0.45	54	1.35	10	0.99	1.7	2.50

ELECTRICAL SPECIFICATIONS AT 277V

Lamp Type	NO. of Lamps	Rated Lamp Watts	Min Start Temp (°F/C)	Input Current (Amps)	Input Power (ANSI Watts)	Ballast Factor	MAX THD %	Power Factor	MAX Lamp Current Crest Factor	BEF
F32T8	2	32	0/-18	0.27	74	1.18	10	0.99	1.7	1.59
F32T8	1	32	0/-18	0.18	46	1.37	15	0.97	1.7	2.98
F25T8	2	25	0/-18	0.21	58	1.2	10	0.98	1.7	2.07
F25T8	1	25	0/-18	0.14	36	1.4	15	0.96	1.7	3.89
F17T8	2	17	0/-18	0.16	43	1.23	15	0.97	1.7	2.86
F17T8	1	17	0/-18	0.11	26	1.42	20	0.95	1.7	5.46
F40T8	1	40	0/-18	0.21	55	1.35	10	0.98	1.7	2.45