



Item#: **54895**
BI-LEVEL & DAYLIGHT HARVEST
PIR SENSOR
FIXTURE ACCESSORY

FEATURES

- Provides multi-level control based on motion and/or daylight contribution.
- Controls 0-10V VDC dimming LED drivers (or dimming ballasts).
- 30' diameter detector sensitivity.
- All control parameters are adjustable by using the RC-100 remote (sold separately)

APPLICATION

Sensor is designed for use with select PQL fixtures that are equipped with a compatible sensor socket.

ELECTRICAL

Power Supply Required 10-14VDC, >50mA

PERFORMANCE

Dim Control Output 0-10V / Max. 25mA Sinking Current

Detection Area 360°

Mounting Height Max 12ft

ENVIRONMENT

Operating Temperature -4° ~ 140°F

Suitable Location **DRY**

Ingress Protection Rating IP20

LIFESPAN

Warranty (Years) --

CONSTRUCTION

Housing PC

Mounting Sensor Socket



Finish White

Specifications are subject to change without notice.

Item#: **54895**
BI-LEVEL & DAYLIGHT HARVEST PIR SENSOR

DIMENSIONS (Inches)

Length	2.4"
Width	1"
Height (Installed)	0.9"
Net Weight (Lbs)	--

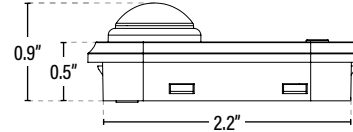

SUPPORTING DOCUMENTS (Grey = not available at this time.)

Product Sheet	VIEW
Install Instructions	VIEW

PACKAGING

		UPC	DIMENSIONS (LxWxH)	GROSS WEIGHT (Lbs)
Master Carton	200	10811768022763	20.6" x 10.6" x 8.9"	--
Individual Box	1	811768022766	--	--
Country of Origin	China			
HS Tariff	--			

ORDERING

ITEM#	DESCRIPTION	CASE
54895	PIR DAYLIGHT HARVESTING MICROWAVE ISO SENSOR/10-14VDC	200

ACCESSORIES

RC-100	HAND HELD REMOTE FOR CONFIGURING PROGRAMMABLE SENSORS	1
--------	---	---

ADDITIONAL INFORMATION:

Factory Default Settings: Factory Default Settings: Sensitivity set to 100%. Hold on time 5 minutes. Daylight sensor is disabled (Set at ☼). Dimming level at 30%. Dimming time at 60 minutes. *Sensor setting can be adjusted by RC-100 remote (sold separately).*