



Item#: **55018**
2X4 - 12 CELL PARABOLIC 2/F32
FLUORESCENT FIXTURE

FEATURES

- Ideal for all commercial and industrial buildings requiring general illumination with recessed configurations.
- Smooth edges for easy handling and has no exposed fasteners.
- Low glare illumination.
- Electronic ballast is standard and available in numerous configurations.

APPLICATION

Office, retail, commercial buildings and work areas.

ELECTRICAL

| | |
|--------------------------|----------|
| Ballast Brand | GE |
| Ballast Configuration | 232 |
| Lamp Type (not included) | F32T8 |
| Number of Lamps | 2 |
| Voltage | 120-277V |

ENVIRONMENT

| | |
|---------------------------|-------------|
| Operating Temperature | -4° ~ 122°F |
| Suitable Location | DAMP |
| Ingress Protection Rating | IP40 |

LIFESPAN

| | |
|------------------|----------|
| Warranty (Years) | 2 |
|------------------|----------|

CONSTRUCTION

| | |
|---------------------|-------------------------|
| Housing | 24 Gauge C.R.S |
| Base / Power Supply | Hard Wired |
| Finish | High Gloss Baked Enamel |

QUALIFICATIONS




Operating temperature may vary depending on lamps used. - Specifications are subject to change without notice.

Item#: **55018**
2X4 - 12 CELL PARABOLIC 2/F32



DIMENSIONS (Inches)

| | |
|------------------|-------|
| Length | 48" |
| Width | 23.4" |
| Height | 4.7" |
| Net Weight (Lbs) | -- |

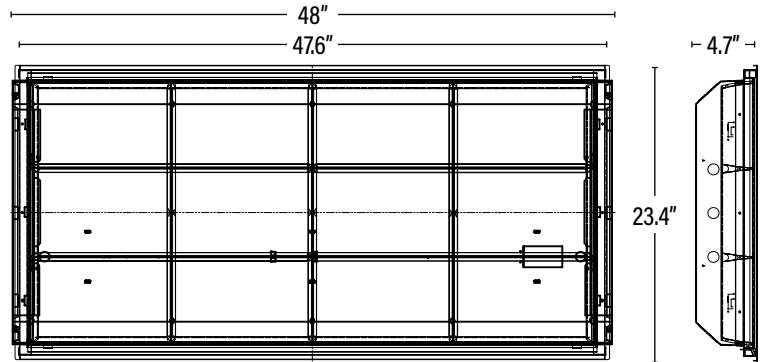

SUPPORTING DOCUMENTS (Grey = not available at this time.)

| | |
|----------------------|------|
| Product Sheet | VIEW |
| Install Instructions | VIEW |

PACKAGING

| | | UPC | DIMENSIONS (LxWxH) | GROSS WEIGHT (Lbs) |
|-------------------|--------------|--------------|----------------------|--------------------|
| Master Carton | 1 | 811768028416 | 49.6" x 24.2" x 5.2" | 176 |
| Country of Origin | China | | | |
| HS Tariff | 9405.10.6020 | | | |

ORDERING

| ITEM# | DESCRIPTION | CASE |
|-------|---|------|
| 55018 | 2 X 4, 12 CELL PARABOLIC 2/32 120/277 - G | 1 |

ITEM INFORMATION