

FLUORESCENT FIXTURES

INSTALL INSTRUCTIONS



PLEASE FIND A QUALIFIED ELECTRICIAN FOR INSTALLATION. Please read the instructions before you install and use the luminaire.

WARNING, CAUTIONS AND OPERATING INSTRUCTIONS

- To reduce the risk of death, personal injury or property damage from fire, electric shock, falling parts, cuts/abrasions, and other hazards read all warnings and instructions included with and on the fixture box and all fixture labels.
- Before installing, servicing, or performing routine maintenance upon this equipment, follow these general precautions.
- Commercial installation, service and maintenance of luminaires should be performed by a qualified licensed electrician.
- For the installation: If you are unsure about the installation or maintenance of the luminaires, consult a qualified licensed electrician and check your local electrical code.
- To prevent wiring damage or abrasion, do not expose wiring to edges of sheet metal or other sharp objects.
- Do not make or alter any open holes in an enclosure of wiring or electrical components during kit installation.

WARNING: RISK OF FIRE OR ELECTRICAL SHOCK

- Turn off electrical power at fuse or circuit breaker box before wiring fixture to the power supply.
- Turn off the power when you perform any maintenance.
- Verify that supply voltage is correct by comparing it with the luminaire label information.
- Make all electrical and grounded connections in accordance with the National Electrical Code and any applicable local code requirements.
- All wiring connections should be capped with UL approved wire connectors.

CAUTION: RISK OF INJURY

- Avoid direct eye exposure to the light source while it is on.
- Account for small parts and destroy packing material, as these may be hazardous to children.

! WARNING DISCONNECT POWER BEFORE INSTALLING OR SERVICING.

GENERAL FIXTURE WIRING

Connect the wiring; black to line, white to neutral and green to ground. Use only UL approved wire and connectors. (Fig 1)

Linear Fluorescent Lamps (sold separately).

MOUNTING OPTIONS - *May vary according to fixture and application.*

HIGH BAYS / STRIPS / WRAPS - CHAIN MOUNT WITH V-HOOK: Use V-Hooks at each end of the fixture, connect the chain to the V-hooks and attach to mounting surface.

STRIPS / WRAPS - SURFACE MOUNT: Secure fixture to mounting surface by inserting anchor screws, toggle bolts or suitable fasteners (not provided), depending on structural conditions into key hole slots on the top side of the fixture.

TROFFERS / PARABOLIC / DIRECT/INDIRECT - T-GRID CEILING (Fig. 2): Start on one side and gently lay down the fixture in the T-Grid ceiling by opening the seismic hanger on each end (Fig. 3) 180° to engage ceiling grid frame. Safety wire tab on the back of the troffer bends up easily to accept wire from the ceiling structure. Thread wire through the tab and finish installation as any other grid fixture (Fig. 4).

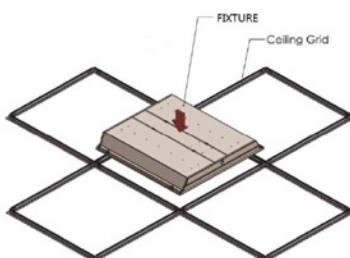
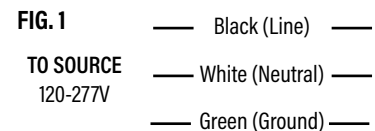


FIG. 2

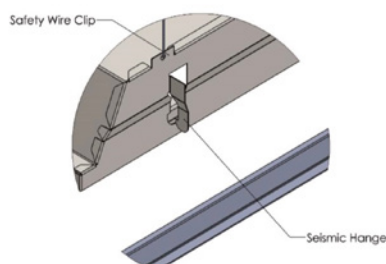


FIG. 3




FIG. 4