



PC Cover is optional

## SPECIFICATIONS

| WATT | ITEM# | DESCRIPTION                                   | COLOR | LUMENS | Lm/W | CRI | BEAM | VOLTS   | LIFE   | LED QTY | POWER FACTOR | INPUT CURRENT |
|------|-------|---|-------|--------|------|-----|------|---------|--------|---------|--------------|---------------|
| 14W  | 83715 | 14W 1/2 OVAL WALL PACK W/PHOTO CELL/45K - SL® | 4500K | 700    | 50   | 70  | 120° | 100-277 | 50,000 | 5       | 0.95         | 0.3A          |
| 30W  | 83716 | 30W 1/2 OVAL WALL PACK W/PHOTO CELL/45K - SL® | 4500K | 2300   | 77   | 70  | 120° | 100-277 | 50,000 | 12      | 0.95         | 0.38A         |

## SAFETY INSTRUCTIONS

Read instructions carefully before attempting to install fixture. Retain instruction for future reference.

**CAUTION:** This product use an input 100-277VAC driver of wide range voltage, but the actual working voltage is depend on the input voltage of the photocell that installed on the product. Normally the input voltage of photocell is 120V/208V/240V/277V single range, and also have 120-277VAC wide range. Please pay attention when installation.


**WARNING:** To avoid the risk of fire, explosion, or electric shock, this product should be installed, inspected, and maintained by a qualified electrician only, in accordance with all applicable electrical codes.

**WARNING:**To avoid electric shock: Be certain electrical power is OFF before and during installation and maintenance. Luminaire must be connected to a wiring system with an equipment-grounding conductor.


**WARNING:** To avoid explosion: Make sure the supply voltage is the same as the rated luminaire voltage. Do not install where the marked operating temperatures exceed the ignition temperature of the hazardous atmosphere. Do not operate in ambient temperatures above those indicated on the luminaire nameplate. Keep lens tightly closed when in operation.

For supply connections use wire rated for at least 80°C


## INSTALLATION

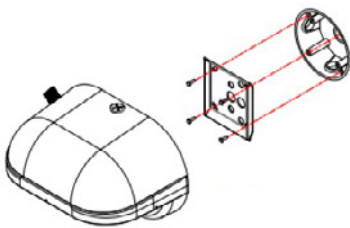


1. Remove the back plate and screw it to the Junctions Box.




2. Make wiring, refer to the wiring layout.




3. Put the fixture to cover the back plate.



4. Screw the bolt at the bottom to secure the fixture

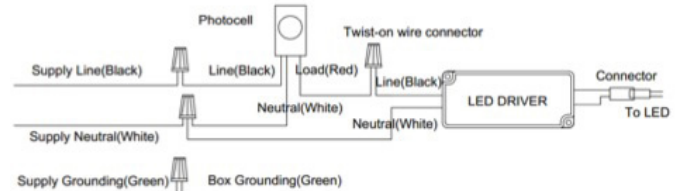

Wiring layout with Photocell

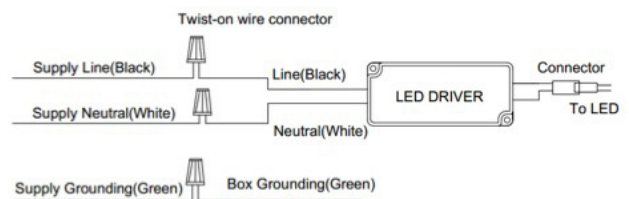

Wiring layout without Photocell