

## Item#: 55101 LED 2X4 SPEC-SELECT™ CENTER BASKET TROFFER RETROFIT INTEGRATED RETROFIT KITS FOR 2X4 LUMINAIRES

#### **FEATURES**

Spec-Select™ Troffers feature adjustable wattage and color temperature for the perfect balance of light in any application.

- Energy efficient
- No flickering

#### **APPLICATION**

Ideal for retrofitting inefficient fixtures in malls, hospitals, airports, offices, lobbies and other residential and commercial applications.



ELECTRIC	

Wattage	34W / 38W / 45W
Voltage	120-277V
Current	0.38-0.16A
Power Factor	0.9
Total Harmonic Distortion (THD)	10

#### **LIGHTING PERFORMANCE**

Lumens	4250 / 4750 / 5625
Lumens Per Watt (LPW)	125
Color Temperature (CCT)	3500K / 4100K / 5000K
Color Rendering (CRI)	82
R9 (Red Value)	6
Beam Angle	100°
Light Distribution	Type VS
BUG Rating (Backlight, Uplight, and Glare)	B2 - U2 - G1
Dimmable Lighting Control	<b>('Dimmable</b> 0-10V, Range 10% - 100%

#### **ENVIRONMENT**

Operating lemperature	-4 ~ 122°F
Suitable Location	DAMP
Ingress Protection Rating	IP40

#### LIFESPAN

Average Life (Hours)	50,000
Warranty (Years)	5

#### COMPONENTS

LED Light Source	Seoul 3528
Driver	SIF40-10950

#### CONSTRUCTION

Housing	Aluminum	
Lens	Frosted	
Base / Power Supply	Hard Wired	
Finish	White	

#### **QUALIFICATIONS**





Visit www.designlights.org/search to confirm qualification. • Published lumens on LED products are approximate and may vary slightly. • Specifications are subject to change without notice.


### Item#: **55101**LED 2X4 SPEC-SELECT™ CENTER BASKET TROFFER RETROFIT



				hes)

Length	47.8"
Width	23.9"
Height	3.1"
Net Weight (Lbs)	14

# Product Sheet VIEW Install Instructions VIEW IES Download from Web Item VIEW LM79 VIEW LM80 VIEW

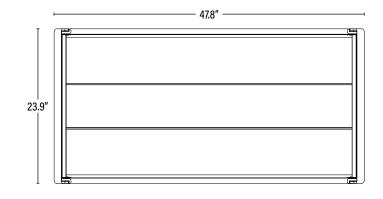

PACKAGING		UPC	<b>DIMENSIONS</b> (LxWxH)	GROSS WEIGHT (Lbs)
Master Carton	1	811768024999	49.8" x 24.9" x 5.2"	17.6
Country of Origin	China			
HS Tariff	9405.10.6020			

#### **ORDERING**

ITEM#	DESCRIPTION	CASE
55101	LED 2X4 SPEC-SELECT™ CENTER BASKET TROFFER RETROFIT/34-38-45W/35-50K/DIMM/120-277V - <b>DLC</b> °	1
ACCESSORIES	<b>S</b>	
55390	EMERGENCY PACK FOR LED FIXTURE 8W/90 MIN- SPLIT TYPE/L - <b>T20C</b>	10
55391	EMERGENCY PACK FOR LED FIXTURE 16W/90 MIN- SPLIT TYPE/L - T20C	10
55392	EMERGENCY PACK FOR LED FIXTURE 25W/90 MIN- SPLIT TYPE/L - T20C	10
REPLACEMEN	T PARTS	
550848	REPLACEMENT LENS FOR LED 2X4 TROFFER RETROFIT/CENTER BASKET	1
SIF40-I0950	REPLACEMENT LED DRIVER	1

#### **ADDITIONAL INFORMATION:**

- Default settings; 45W, 5000K.
- The color temperature and wattage may be adjusted by two slide switches integrated into the driver. The color temperature and wattage should be selected prior to installation.

