



**IESNA  
SUSTAINING  
MEMBER**

Ref. No.: LCGP15060071  
Date of issue: June 10, 2015  
Version: 1.0  
Total pages: 8

**Test report of  
IES LM-79-08  
Approved Method: Electrical and Photometric  
Measurements of Solid-State Lighting Products**

Rendered to:  
**P.Q.L., Inc.**  
2285 Ward Avenue / Simi Valley, CA 93065

For products:  
2x4 Luminaires for Ambient Lighting of Interior Commercial Spaces

Models:  
55180

**Test date:** June 09, 2015  
**Test laboratory:** LCTECH (Zhongshan) Testing Service Co.,Ltd  
2/F., Technology and Enterprise Development Center, Guangyuan Road,  
Xiaolan, Zhongshan, Guangdong, China  
**Laboratory note:** N/A

**Complied by:**  
**Bowen Pang**  
**Project Engineer**  
**June 10, 2015**

**Reviewed by:**  
**Richard Li**  
**Technical Manager**  
**June 10, 2015**

---

The duplication of this report or parts of it and its use for advertising purposes is only allowed with permission of the testing laboratory. This report contains the result of the examination of the product sample submitted by the applicant. A general statement concerning the quality of the products from the series manufacture cannot be derived therefore. This report must not be used by the customer to claim product certification, approval or endorsement by NVLAP, NIST, or any agency of the Federal Government.

## Table of Contents

<b>1 General</b> .....	3
1.1 Product Information .....	3
1.2 Standards or methods .....	4
1.3 Equipment list.....	4
<b>2 Test conducted and method</b> .....	5
2.1 Ambient Condition .....	5
2.2 Power Supply Characteristics.....	5
2.3 Seasoning and Stabilization .....	5
2.4 Electrical Instrumentation .....	5
2.5 Color Measurement Method .....	5
2.6 Total Luminous Flux Measurement Method .....	5
2.7 Luminous Intensity Distribution Measurement Method .....	5
2.8 Spatial Non-uniformity of Chromaticity .....	5
<b>3 Test Result Summary</b> .....	6
3.1 Electrical data.....	6
3.2 Photometric data.....	6
3.3 Additional test at 277V .....	6
<b>4 Test Data</b> .....	7
4.1 Spectral Distribution .....	7
4.2 Chromaticity Diagram (CIE 1931) .....	7
4.3 ANSI Chromaticity Quadrangles Diagram .....	8
4.4 Color Rendering Details .....	8

# 1 General


## 1.1 Product Information

Brand Name	Superior Life®
Trade Mark	-
Luminaire Type	2x4 Luminaires for Ambient Lighting of Interior Commercial Spaces
Model Number	55180
Rated Inputs	AC 100-277V, 60Hz
Rated Power	50 W
Rated Initial Lamp Lumens	5400 lm
Declared CCT	5000 K
Power Supply	Integral LED driver in luminaires
LED Package, Array or Module	Model: HL-A-2835DW-S1-08-HR3, manufactured by GuangZhou HongLi Opto-Electronic Co.,Ltd,
Date of Receipt Samples	May 26, 2015
Quantity of Receipt Samples	1 unit
Note	

### Photo



Picture 2

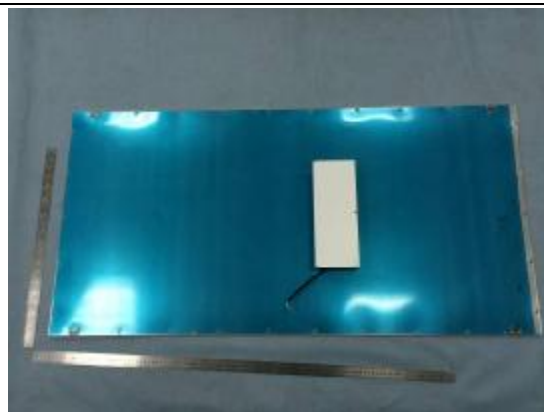

Picture 2

### 1.2 Standards or methods

The following standards are partly or totally used or referenced for test:

No.	Name
ANSI/NEMA/ ANSLG C78.377-2011	Specifications for the Chromaticity of Solid State Lighting Products
ANSI C82.77-2002	Harmonic Emission Limits—Related Power Quality Requirements for Lighting Equipment
CIE Pub. No. 13.3-1995	Method of Measuring and Specifying Color Rendering of Light Sources
CIE Pub. No. 15:2004	Colorimetry
IES LM-79-08	Electrical and Photometric Measurements of Solid-State Lighting Products

### 1.3 Equipment list

ID	Instrument	Model name	Cal. date	Next cal. Date
AC Power supply	LC-I-923	CHP-500	2015-02-05	2016-02-04
AC Power supply	LC-I-953	APW-110N	2015-02-05	2016-02-04
Power analyzer	LC-I-928	WT210	2014-03-21	2015-03-20
Power analyzer	LC-I-954	WT210	2015-02-05	2016-02-04
Multimeter	LC-I-972	Fluke 17B	2014-08-15	2015-08-14
Photometric colorimetric electric system (2 meter sphere)	LC-I-900	SPR3000	Before use	Before use
Standard lamp	LC-I-946	110V/200W	2014-10-09	2015-10-09
Goniophotometer(with mirror)	LC-I-902	GMS2000	2015-04-11	2016-04-11
Wireless temperature transmitter	LC-I-958	DWRP-B(0)	2014-08-19	2015-08-18
Wireless temperature transmitter	LC-I-959	DWRP-B(0)	2014-08-19	2015-08-18

## 2 Test conducted and method

### 2.1 Ambient Condition

The ambient temperature in which measurements are being taken was maintained at  $25^{\circ}\text{C} \pm 1^{\circ}\text{C}$ , the air flow around the sample(s) being tested did not affect the performance.

### 2.2 Power Supply Characteristics

The AC power supply had a sinusoidal voltage wave shape at the prescribed frequency (60 Hz) such that the RMS summation of the harmonic components does not exceed 3 percent of the fundamental during operation of the test item.

The voltage of AC power supply (RMS voltage) applied to the device under test was regulated to within  $\pm 0.2$  percent under load.

### 2.3 Seasoning and Stabilization

No seasoning was performed in accordance with IESNA LM-79-08. And before the measurement, the sample was stabilized until the light output and power variations were less than 0.5% in 30 minutes intervals (3 readings, 15 minutes apart).

### 2.4 Electrical Instrumentation

The calibration uncertainties of the instruments for AC voltage and current were less than 0.2 percent, and the calibration uncertainty of the AC power meter was less than 0.5 percent (95 % confidence interval,  $k=2$ ).

### 2.5 Color Measurement Method

Spectral radiant flux was measured by a sphere (2 meter)-spectroradiometer system, and the color characteristics (Color rendering index, correlated color temperature, chromaticity coordinate) were calculated from these by software automatically.

### 2.6 Total Luminous Flux Measurement Method

The customer did not require this measurement.

### 2.7 Luminous Intensity Distribution Measurement Method

The customer did not require this measurement.

### 2.8 Spatial Non-uniformity of Chromaticity

The customer did not require this measurement.

### 3 Test Result Summary

#### 3.1 Electrical data

Criteria Item	Result (Sphere)	Result (Goniophotometer)
Input Voltage	120.02 V~60Hz	-
Input Current	0.415 A	-
Total Power	49.51 W	-
Power Factor	0.994	-
I-THD	9.95%	-
Off-state Power	0.0 W	-

#### 3.2 Photometric data

Criteria Item	Result (Sphere)	Result (Goniophotometer)
Total Lumens	-	-
Luminaire Efficacy	-	-
Correlated Color Temperature (CCT)	4927 K	-
Color Rendering Index (CRI)	82.0	-
R9	2	-
Chromaticity Coordinate (x,y)	x= 0.3482 y= 0.3633	-
Chromaticity Coordinate (u,v)	u= 0.2091 v= 0.3271	-
Chromaticity Coordinate (u',v')	u'= 0.2091 v'= 0.4907	-
Duv	0.0045	-
Spacing Criteria (0-180)	-	-
Spacing Criteria (90-270)	-	-


#### 3.3 Additional test at 277V

Criteria Item	Result (Sphere)	Result (Goniophotometer)
Input Voltage	277.05 V~60Hz	-
Power Factor	0.913	-
I-THD	15.28%	-
Off-state Power	0.0 W	-


Note: N.A.

## 4 Test Data


### 4.1 Spectral Distribution

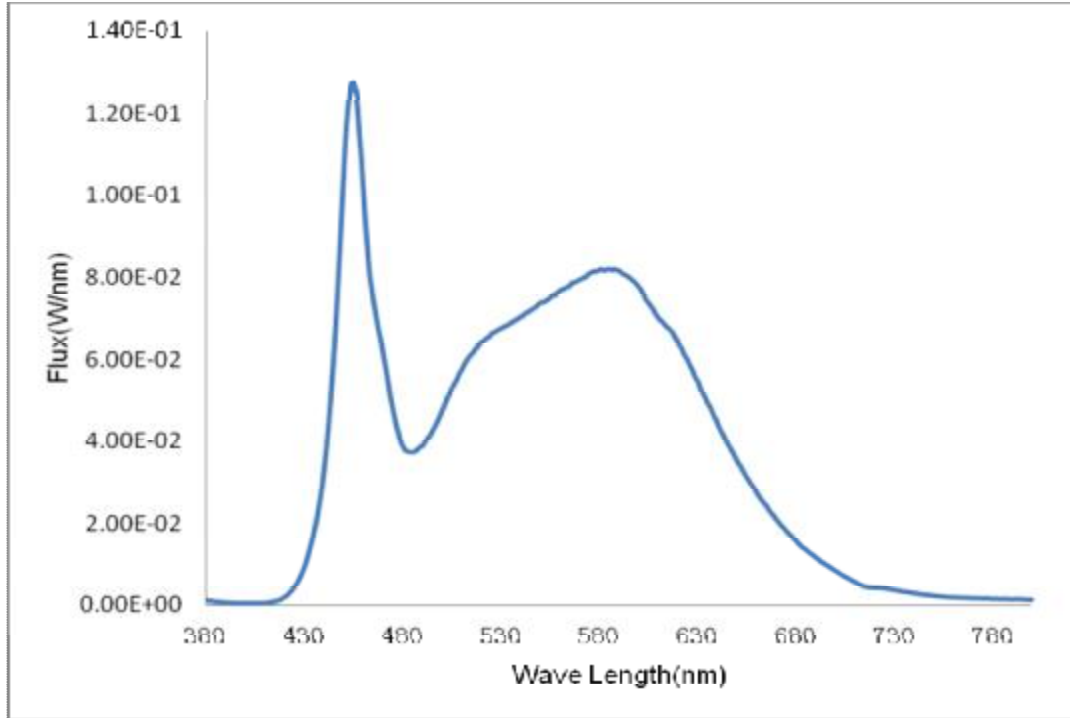

### 4.2 Chromaticity Diagram (CIE 1931)

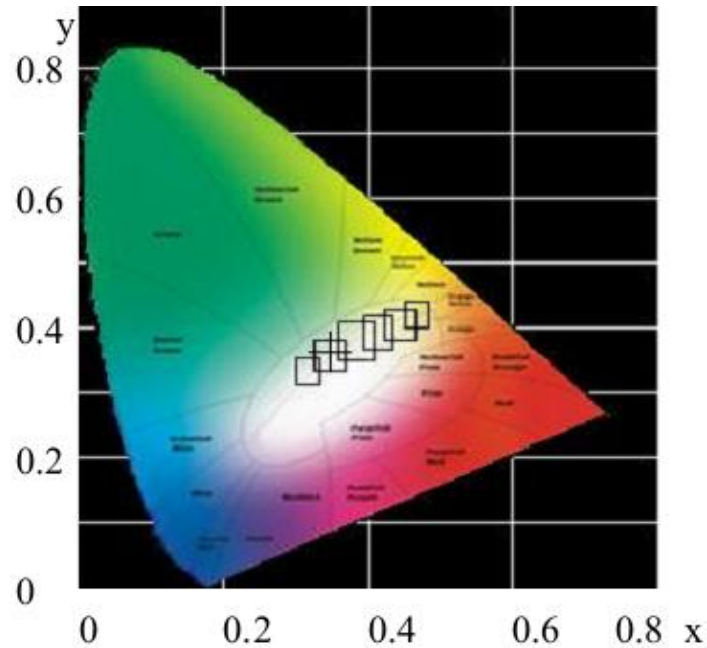

### 4.3 ANSI Chromaticity Quadrangles Diagram

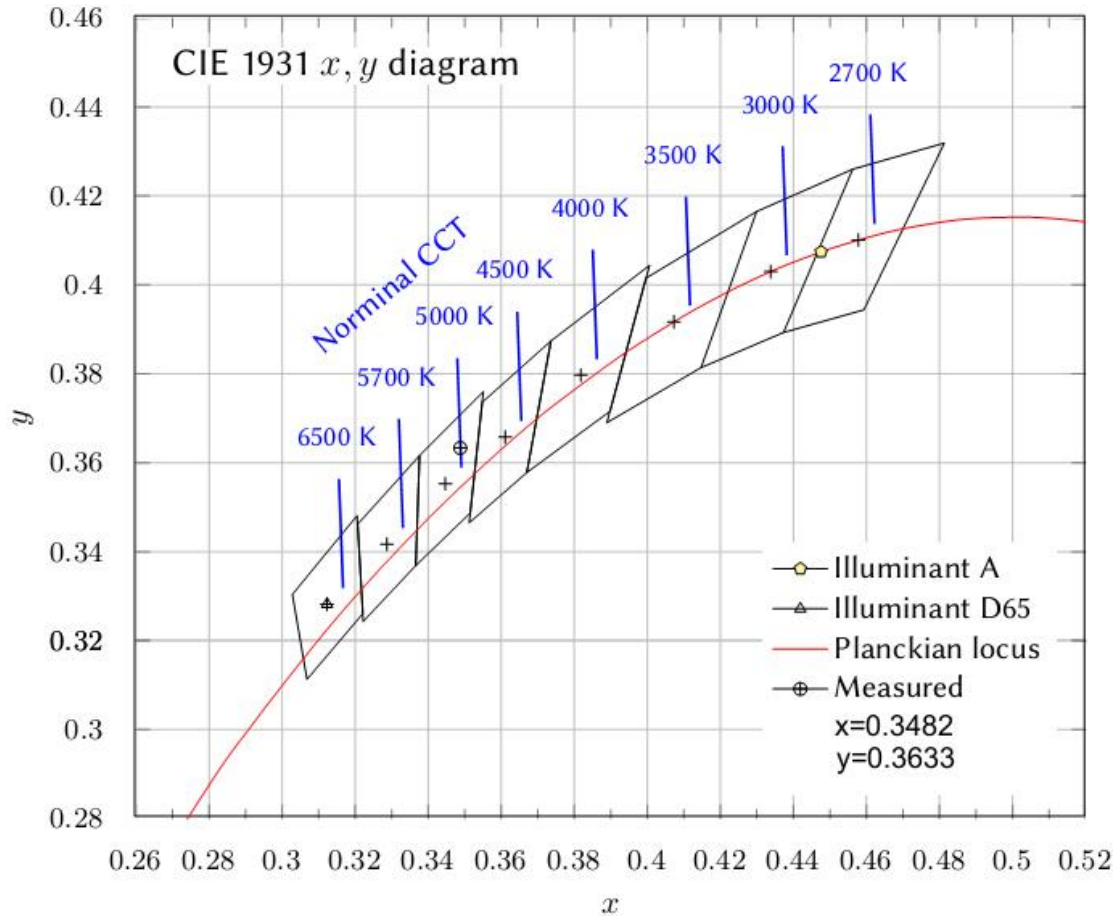

### 4.4 Color Rendering Details

R1	R2	R3	R4	R5
80	90	95	77	79
R6	R7	R8	R9	R10
85	85	64	2	76
R11	R12	R13	R14	R15
76	53	84	97	73

\*\*\*\*End of test report\*\*\*\*