



Item#: **55379**
LED 96" VAPOR TIGHT
 DIRECT LINEAR AMBIENT LUMINARIES

FEATURES

- Low-profile which meets limitless range of applications.
- Use 30% less energy than a linear fluorescent fixtures.
- 100% UV stabilized polycarbonate housing and diffusers eliminates glare and produces even light distribution.
- Liquid silicone perimeter gasket
- Stainless steel clips.

MOUNTING

Designed for surface and suspended mounting.

APPLICATION

Ideal for parking garages, cold storage, food processing facilities, dusty and wet environments.

ELECTRICAL

Wattage	75W
Voltage	120-277V
Current	--
Power Factor	0.9
Total Harmonic Distortion (THD)	10

LIGHTING PERFORMANCE

Lumens	9525
Lumens Per Watt (Lm/W)	127
Color Temperature (CCT)	3500K
Color Rendering (CRI)	82
R9 (Red Value)	--
R13 (Skin Tones)	--
Beam Angle	120°
Light Distribution	Type VS
Dimmable Lighting Control	<i>Dimmable</i> 0-10V, Range 10% - 100%

ENVIRONMENT

Operating Temperature	-40° ~ 122°F
Suitable Location	WET
Ingress Protection Rating	IP65

LIFESPAN

Average Life (Hours)	50,000
Warranty (Years)	5

COMPONENTS

LED Light Source	Seoul 3528
Driver	Simon SIP80-I1700

CONSTRUCTION

Housing	Polycarbonate
Base / Power Supply	Hard Wired
Finish	White

QUALIFICATIONS



Published lumens on LED products are approximate and may vary slightly.

PERFORMANCE DATA

PACKAGING


Item#: **55379**
LED 96" VAPOR TIGHT



DIMENSIONS (Inches)

Length	94.5"
Width/Diameter	3.5"
Height	3.1"
Weight (Lbs)	7.7

Line drawings may not be to scale and are for general reference only.

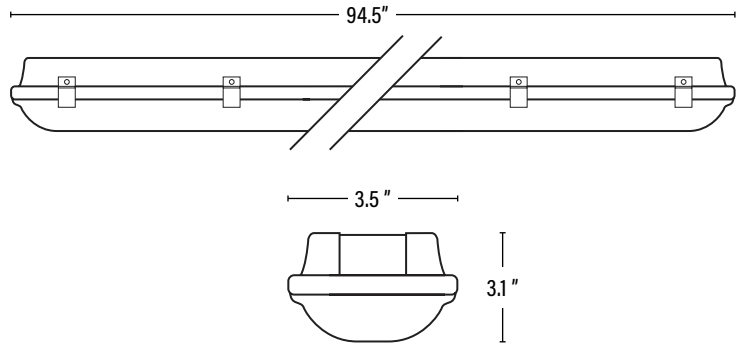

SUPPORTING DOCUMENTS (Grey = not available at this time.)

Product Sheet	VIEW
Install Instructions	VIEW
IES Download from Web Item	VIEW
LM79	VIEW
LM80	VIEW

PACKAGING

		UPC	DIMENSIONS (LxWxH)	GROSS WEIGHT (Lbs)
Master Carton	4	--	--	--
Individual Box	1	--	--	--
Country of Origin	China			
HS Tariff	9405.40.6000			

ORDERING

ITEM#	DESCRIPTION	CASE
55379	LED VAPOR TIGHT 96" 75W/35K/FR LENS/120-277V/DIMMABLE/V2 - SUPERIOR LIFE®	4

ACCESSORIES/REPLACEMENT PARTS

SIP80-I1700	REPLACEMENT DRIVER	1
-------------	--------------------	---

ADDITIONAL INFORMATION:

Family Items: 55380/4000K · 55381/5000K

PERFORMANCE DATA

PACKAGING