



Item#: **55391**  
**LED EMERGENCY PACK**  
SPLIT TYPE/L

**FEATURES**

- Programmable constant current driver
- SELV for output voltage <60V DC
- Open and Short Circuit Protection
- No PCB
- Sound Rated A
- Class 2

**APPLICATION**

For use with drivers that are 100W or less that are in LED fixtures.

**INPUT**

Input Current	100mA Max.
Input Voltage	120-277V 50/60hz
Power Factor	0.6

**OUTPUT**

Output Power	16W Max.
Output Current	100-1050mA
Output Voltage	11-56V
Output Short Protection	Yes
Output Open Protection	Yes

**PERFORMANCE**

Recharge Power	8W Max.
Standby Power	<0.5W
Red Lead	3A, 90V
White/Black Lead	100W Max.
Time to Light	0.3S from detection of emergency event
Recharge Time Required	32 Hours Max.
Battery Type	LiFePO4 9.6VDC
Battery Capacity Available	3000mAh

**ENVIRONMENT**

Ambient Temperature	50° ~ 122°F
Tc MAX	158°F / 70°C

**LIFESPAN**

Warranty (Years)	<b>5</b>
------------------	----------

**QUALIFICATIONS**




Meets Standard(s) for Safety UL 924 • UL / UL R/C, Class 2 • FCC Part 15 Class B • Specifications are subject to change without notice.

Item#: **55391**  
**LED EMERGENCY PACK**



ITEM INFORMATION

DIMENSIONS (Inches)	DRIVER	BATTERY
Length	5.9"	9.4"
Width	1.7"	1.2"
Height	1"	1.2"
Weight (Lbs)	--	--

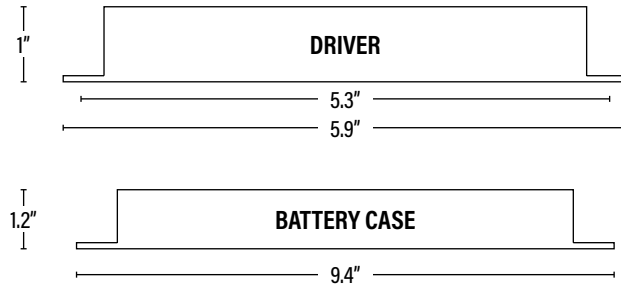

SUPPORTING DOCUMENTS <small>(Grey = not available at this time.)</small>	
Product Sheet	VIEW
Install Instructions	VIEW

PACKAGING	UPC	DIMENSIONS (LxWxH)	GROSS WEIGHT (Lbs)	
Master Carton	10	10811768024309	17.3" x 11.8" x 6.7"	20.7
Individual Box	1	811768024302	--	2.1
Country of Origin	China			
HS Tariff	9405.99.4090			

**ORDERING**

ITEM#	DESCRIPTION	TITLE 20	CASE
55391	EMERGENCY PACK FOR LED FIXTURE 16W/90 MIN - SPLIT TYPE/L	Yes	10

**ADDITIONAL INFORMATION:**

- For use with drivers that are 100W or less that are in LED fixtures.
- An un-switched AC power source of 120V AC to 277V AC is required.
- This device is designed for use in fixtures listed for dry and damp locations.