



Item#: **55495**
LED 2' SPEC-SELECT™

LINEAR HIGH BAY

HIGH-BAY LUMINAIRES FOR COMMERCIAL AND INDUSTRIAL BUILDINGS

FEATURES

- Selectable wattage and color temperature
- High lumen output - bright and high lumen per watt.
- Integrated LED - maintenance free.
- Replaces HID and fluorescent fixtures.
- Wide beam angle - uniform light distribution.
- All steel surfaces are painted after fabrication for smooth edges and rounded corners.
- Pre-installed sensor socket.

MOUNTING

Designed for suspended or pendent mounting.
(V-hooks & 41.3" chains included)

APPLICATION

Larger warehouses, retail applications, commercial buildings and work areas.

ELECTRICAL

Wattage	78W / 92W / 115W
Voltage	120-277V
Current	115W = 0.95A @ 120V
Power Factor	0.9
Total Harmonic Distortion (THD)	--

LIGHTING PERFORMANCE

Lumens	11700 / 13800 / 17250
Lumens Per Watt (LPW)	150
Color Temperature (CCT)	4000K / 5000K
Color Rendering (CRI)	80
R9 (Red Value)	--
R13 (Skin Tones)	--
Beam Angle	120°
Light Distribution	Type VS
BUG Rating (Backlight, Uplight, and Glare)	--
Dimmable Lighting Control	<i>Dimmable</i> 0-10V, Range 10% - 100%

ENVIRONMENT

Operating Temperature	-4° ~ 122°F
Suitable Location	DAMP
Ingress Protection Rating	IP40

LIFESPAN

Average Life (Hours)	50,000
Warranty (Years)	5

COMPONENTS

LED Light Source	--
Driver	--

CONSTRUCTION

Housing	24 Gauge C.R.S.
Lens	Acrylic (PMMA)
Base / Power Supply	Hard Wired
Finish	White

QUALIFICATIONS

Pending

Published lumens on LED products are approximate and may vary slightly. • Specifications are subject to change without notice.


Item#: **55495**
LED 2' SPEC-SELECT™ LINEAR HIGH BAY



ITEM INFORMATION

DIMENSIONS (Inches)

Length	24.8"
Width	15"
Height	2.2"
Net Weight (Lbs)	--
Chain Length	41.3" (2 ea.)

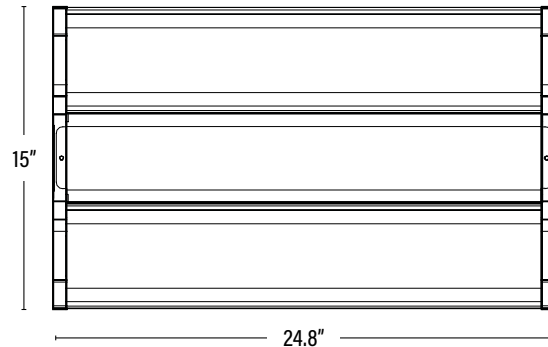

SUPPORTING DOCUMENTS (Grey = not available at this time.)

Product Sheet	VIEW
Install Instructions	VIEW
IES Download from Web Item	VIEW
LM79	VIEW
LM80	VIEW

PACKAGING	UPC	DIMENSIONS (LxWxH)	GROSS WEIGHT (Lbs)
Master Carton	1	--	--
Country of Origin	China		
HS Tariff	9405.10.6020		

ORDERING

ITEM#	DESCRIPTION	CASE
55495	LED 2FT SPEC-SELECT™ LINEAR HIGH BAY/78-92-115W/40-50K/DIMM/ISO/120-277V	1

ACCESSORIES

55219	PENDENT MOUNT FOR HL HIGH BAY	25
55708	PHOTO/MICROWAVE BI-LEVEL DIMMING SENSOR FOR POWER-SELECT™ HB	56
55709	REMOTE CONTROL FOR PHOTO/MICROWAVE MOTION SENSOR	150
55319	EMERGENCY PACK FOR LED FIXTURE 8W/90 MIN/INTEGRATION TYPE - T20C (For use with drivers that are 100W or less.)	6
55320	EMERGENCY PACK FOR LED FIXTURE 16W/90 MIN/INTEGRATION TYPE - T20C (For use with drivers that are 100W or less.)	6
55321	EMERGENCY PACK FOR LED FIXTURE 25W/90 MIN/INTEGRATION TYPE - T20C (For use with drivers that are 100W or less.)	6
55533	MOUNTING PLATE/INTEGRATED EM PACK FOR HL HIGH BAYS	100
45002	100FT ROLL NO. 12 JACK CHAIN	Per Foot

REPLACEMENT PARTS

--	REPLACEMENT LED DRIVER	1
----	------------------------	---

ADDITIONAL INFORMATION:

Note: When using an Emergency Pack with the fixture, cable mounting is recommended to control the balance of the fixture.