

2



Item#: 55650 LED 2X4 - 18 CELL PARABOLIC LED READY FIXTURE

FEATURES

- High efficiency with excellent glare control
- Use 30% less energy than a traditional fluorescent fixture
- · Die formed and rigidly fabricated
- Mechanical light trap prevents light leaks
- Door frame; concealed 22 gauge frame with integral hinges, and a spring steel latch
- Four corner tie points for safety wire support; when required
- LED ready with non-shunted sockets
- · Pre-wired at both ends
- Works with both Single-End and Double-End Direct Wire lamps
- Compatible with traditional ceiling grids

APPLICATION

Ideal for larger warehouses, retail applications, commercial buildings and work areas.

ELECTRICAL

Lamp Type (not included)	Т8		
Number of Lamps	3		
Voltage	120-277V		
ENVIRONMENT			
Operating Temperature	-4° ~ 122°F		
Suitable Location	DAMP		
Ingress Protection Rating	IP40		
LIFESPAN			

Warranty (Years) CONSTRUCTION

Housing	24 Gauge Steel
Base / Power Supply	Hard Wired
Parabolic Louver	Anodized Aluminum
Finish	High Gloss Baked White Enamel

QUALIFICATIONS



Operating temperature may vary depending on lamps used. • Specifications are subject to change without notice.

Item#: **55650 LED 2X4 - 18 CELL PARABOLIC**




DIMENSIONS (Inches)	
Length	48"
Width	23.4"
Height	4.7"
Weight (Lbs)	

Line drawings may not be to scale and are for general reference only.

SUPPORTING DOCUMENTS (Grey = not available at this time.)

Product Sheet	VIEW
Install Instructions	VIEW

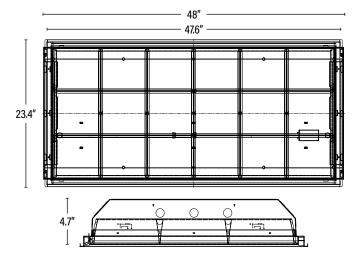

PACKAGING		UPC	DIMENSIONS (LxWxH)	GROSS WEIGHT (Lbs)
Master Carton	1		49.6" x 24.2" 5.2"	17.6
Country of Origin	China			
HS Tariff	9405.10.6020			

ORDERING

ITEM#	DESCRIPTION	CASE
55650	LED 2X4, 18 CELL PARABOLIC 3 T8	1
REPLACEME	ENT PARTS	
550509	REPLACEMENT CLIPS ONLY FOR 55050 2X4 18 CELL PARABOLIC 3 T8 (2 PER SET)	1

ADDITIONAL INFORMATION:

• Pairs with Direct Wire Single-End or Double-End UL Type B Lamps. Follow specific lamp installation wiring instructions for correct wiring.