



Item#: **55696**  
**LED 30W EMERGENCY PACK**  
FOR LED HIGH BAY FIXTURES

**FEATURES**

- Kit includes; an LED emergency pack and test light indicator
- Easy installation
- High efficiency
- Constant output power
- Self test

**APPLICATION**

For use in select 277-480V AC LED High Bays that are 150W or less with 0-10V dimmable drivers.

**OUTPUT**

Output Power	30W
Output Current	150mA Max.
Output Voltage	400V DC

**INPUT**

Input Power	20W Max.
Input Current	100mA Max.
Input Voltage	277-480V AC

**PERFORMANCE**

Emergency Time	90 Min.
Recharge Time Required	≥24 Hours
Battery Type	Lithium Ion

**ENVIRONMENT**

Ambient Temperature	41° ~ 122°F
Suitable Location	<b>DAMP</b>
Max. Mounting Height	43FT

**LIFESPAN**

Warranty (Years)	<b>5</b>
------------------	----------

**QUALIFICATIONS**




Meets Standard(s) for Safety UL 924 • Specifications are subject to change without notice.

Item#: **55696**  
**LED 30W EMERGENCY PACK**



**DIMENSIONS** (Inches)

Length	12.6"
Width	3"
Height	1.8"
Weight (Lbs)	--

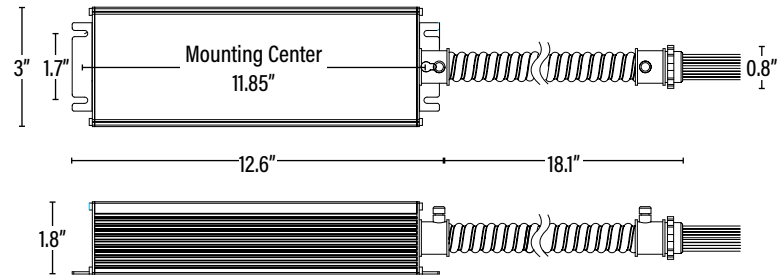

**SUPPORTING DOCUMENTS** (Grey = not available at this time.)

Product Sheet	<a href="#">VIEW</a>
Install Instructions	<a href="#">VIEW</a>

**PACKAGING**

		UPC	DIMENSIONS (LxWxH)	GROSS WEIGHT (Lbs)
Master Carton	10	10811768024545	19.7" x 17.7" x 14"	--
Individual Box	1	811768024548	16.9" x 9.4" x 2.6"	--
Country of Origin	China			
HS Tariff	--			

**ORDERING**

ITEM#	DESCRIPTION	TITLE 20	CASE
55696	30W EMERGENCY PACK FOR UP TO 150W LED HIGH BAY/277-480V AC/90 MIN	No	10

**ADDITIONAL INFORMATION:**

- Will not operate with fixtures that do not have 0-10V dimming leads.
- An un-switched AC power source is required.
- For use in select 277-480V AC LED High Bays that are 150W or less with 0-10V dimmable drivers.
- This device is designed for use in fixtures listed for dry and damp locations.

ITEM INFORMATION