



Item#: **55700**  
**LED 8W EMERGENCY PACK**  
FOR LED INDOOR FIXTURES

**FEATURES**

- Kit includes; an LED emergency pack and test light indicator.
- Easy Installation - directly connect to AC Input of LED Fixtures.
- High voltage output
- Constant wattage delivery maintains illumination level for the full emergency runtime with no degradation
- Self test

**APPLICATION**

For use in LED Interior Fixtures with 0-10V dimmable drivers that are 60W or less, such as panels, troffers, downlights, linear lights, and high bays, that are in LED fixtures.

**OUTPUT**

Output Power	8W
Output Voltage	170V DC

**INPUT**

Input Power	12W Max.
Input Current	≤100mA Max.
Input Voltage	100-347V • 50/60Hz

**PERFORMANCE**

Emergency Time	90 Min.
Recharge Time Required	≥24 Hours
Battery Type	Lithium

**ENVIRONMENT**

Ambient Temperature	41° ~ 122°F
Suitable Location	<b>DAMP</b>
Max. Mounting Height	15.5FT

**LIFESPAN**

Warranty (Years)	<b>2</b>
------------------	----------

**QUALIFICATIONS**

Model Number	PQL-EMP-08
--------------	------------



*Published lumens on LED products are approximate and may vary slightly. • Specifications are subject to change without notice.*


Item#: **55700**  
**LED 8W EMERGENCY PACK**



ITEM INFORMATION

**DIMENSIONS** (Inches)

Length	13.8"
Width	1.97"
Height	0.94"
Weight (Lbs)	--

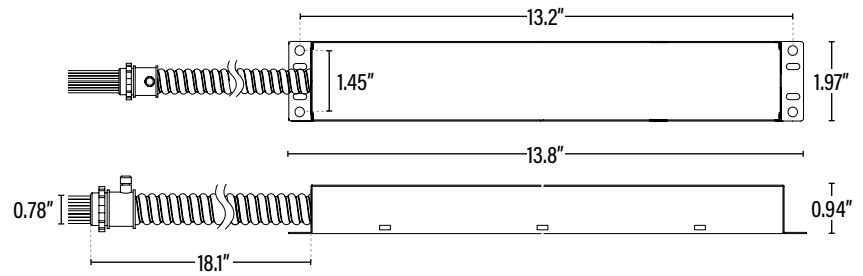

**SUPPORTING DOCUMENTS** (Grey = not available at this time.)

Product Sheet	VIEW
Install Instructions	VIEW

**PACKAGING**

		UPC	DIMENSIONS (LxWxH)	GROSS WEIGHT (Lbs)
Master Carton	10	10811768023982	--	--
Individual Box	1	811768023985	18.1" x 6.3" x 2.3"	--
Country of Origin	China			
HS Tariff	--			

**ORDERING** Qualification Model # PQL-EMP-08

ITEM#	DESCRIPTION	TITLE 20	CASE
55700	EMERGENCY PACK FOR LED INDOOR FIXTURE 8W/90 MIN	Yes	10

**ACCESSORIES**

55707	IP65/M12 TEST LIGHT/BUTTON 2 in 1 FOR EMERGENCY PACK 55700/55702		1
55693	T-BAR MOUNTING KIT ACCESSORY FOR EMERGENCY PACK		50

**ADDITIONAL INFORMATION:**

- An un-switched AC power source is required.
- For use with 120-277V LED 0-10V dimmable drivers that are 60W or less. Can also be used with non 0-10V dimmable 120-277V LED Fixtures that do not exceed 8W.
- This device is designed for use in fixtures listed for dry and damp locations.
- Not for use with fixtures that are 120V - only design.