



Item#: **55704**  
**LED EMERGENCY PACK - 4W**  
**LED STEALTH™ FULL CUTOFF WALL PACKS**

**FEATURES**

- Internal lithium battery
- Test switch indicator light
- Meets or exceeds safety standards UL 924 and CSA C22.2 No. 141
- Title 20 listed

**APPLICATION**

For use with LED Fixture drivers that are 50W or less.

**INPUT**

Input Power	5W Max.
Input Current	100mA Max.
Input Voltage	120-277V, 50/60Hz

**OUTPUT**

Output Power	4W
Output Current	30-400mA
Output Voltage	10-60Vdc
Over Charge Protection	Yes
Over Discharge Protection	Yes
Short Circuit Protection	Yes

**PERFORMANCE**

Emergency Time	90 Mins.
Recharge Time Required	24 Hours
Battery Type	Li-ion battery-3.7V/2500mAh
Battery Charging Current	250mA

**ENVIRONMENT**

Operating Temperature	32° ~ 120° F
Suitable Location	<b>DAMP</b>

**LIFESPAN**

Warranty (Years)	<b>5</b>
------------------	----------

**QUALIFICATIONS**



Meets Standard(s) for Safety UL 924 • Specifications are subject to change without notice.


Item#: **55704**  
**LED EMERGENCY PACK - 4W**



ITEM INFORMATION

**DIMENSIONS** (Inches)

Length	5.5"
Width	1.4"
Height	0.9"
Net Weight (Lbs)	0.4

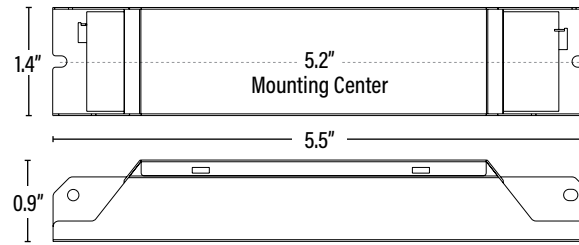

**SUPPORTING DOCUMENTS** (Grey = not available at this time.)

Product Sheet	VIEW
Install Instructions	VIEW

PACKAGING		UPC	DIMENSIONS (LxWxH)	GROSS WEIGHT (Lbs)
Master Carton	50	10811768021810	13" x 9.8" x 6.5"	21.1
Individual Box	1	811768021813	6.9" x 2.4" x 1.4"	0.4
Country of Origin	China			
HS Tariff	9405.99.4090			

**ORDERING**

ITEM#	DESCRIPTION	TITLE 20	CASE
55704	EMERGENCY PACK FOR LED FIXTURE 4W/90 MIN/IP65 2 & 1 TEST LIGHT AND BUTTON	Yes	50

**ADDITIONAL INFORMATION:**

- For use with LED fixture drivers that are 50W or less.
- Use with grounded fixtures in dry or damp locations only.
- This LED Emergency Backup unit requires an un-switched AC power source of 120-277V, 50/60Hz
- The fixture's AC driver must be on the same branch circuit as the LED Emergency Backup unit.