



Item#: **55718**  
**LED 20W EMERGENCY PACK**  
FOR LED INDOOR FIXTURES

**FEATURES**

- Split-type external Lithium battery
- Test switch indicator light
- Constant output power
- Self test
- Short circuit, over charge and over discharge protection

**APPLICATION**

For use with LED fixture drivers that are 150W or less.

**OUTPUT**

Output Power	20W
Output Current	420-800mA
Output Voltage	25-48V DC

**INPUT**

Input Power	7W Max.
Input Current	≤100mA Max.
Input Voltage	100-277V • 50/60Hz

**PERFORMANCE**

Emergency Time	90 Min.
Recharge Time Required	≥24 Hours
Battery Charging Current	250mA
Battery Type	Lithium - 11.1V/4000 mAH

**ENVIRONMENT**

Ambient Temperature	32° ~ 122°F
Suitable Location	<b>DAMP</b>

**LIFESPAN**

Warranty (Years)	<b>5</b>
------------------	----------

**QUALIFICATIONS**




Meets Standard(s) for Safety UL 924 • Specifications are subject to change without notice.

Item#: **55718**  
**LED 20W EMERGENCY PACK**

DIMENSIONS (Inches)	DRIVER	BATTERY
Length	7.4"	8.9"
Width	1.5"	1.5"
Height	1.1"	0.9"
Net Weight (Lbs)	--	--

**SUPPORTING DOCUMENTS** (Grey = not available at this time.)

Product Sheet	VIEW
Install Instructions	VIEW

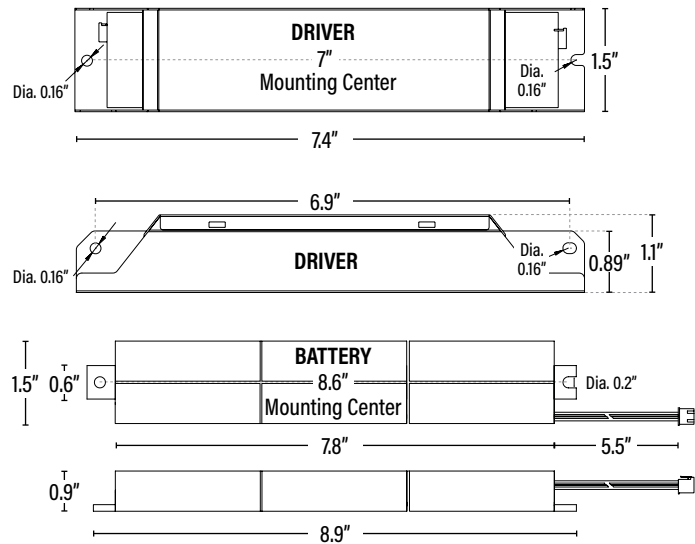

PACKAGING	UPC	DIMENSIONS (LxWxH)	GROSS WEIGHT (Lbs)
Master Carton	20	--	16.7" x 10.4" x 8.1"
Individual Box	1	--	9.7" x 3.9" x 1.4"
Country of Origin	China		
HS Tariff	--		

**ORDERING**

ITEM#	DESCRIPTION	CASE
55718	20W EMERGENCY PACK FOR SLIM LED STRIP/VAPOR TIGHT UP TO 150W/90 MIN	20

**ADDITIONAL INFORMATION:**

- An un-switched AC power source is required.
- This device is designed for use in fixtures listed for dry and damp locations.