

SELECTABLE  
**COLOR**  
TEMPERATURE

Item#: **55722**  
**LED 4' TONE-SELECT™**

**LINEAR HIGH BAY**

**HIGH-BAY LUMINAIRES FOR COMMERCIAL AND INDUSTRIAL BUILDINGS**

**FEATURES**

- Selectable color temperature
- High lumen output - bright and high lumen per watt.
- Integrated LED - maintenance free.
- Replaces HID and fluorescent fixtures.
- Wide beam angle - uniform light distribution.
- All steel surfaces are painted after fabrication for smooth edges and rounded corners.
- Pre-installed sensor socket.

**MOUNTING**

Designed for suspended or pendent mounting.  
*(V-hooks & 41.3" chains included)*

**APPLICATION**

Larger warehouses, retail applications, commercial buildings and work areas.

**ELECTRICAL**

Wattage	400W
Voltage	120-277V
Current	3.3A @ 120V
Power Factor	0.9
Total Harmonic Distortion (THD)	11.1

**LIGHTING PERFORMANCE**

Lumens	60000
Lumens Per Watt (LPW)	150
Color Temperature (CCT)	4000K / 5000K
Color Rendering (CRI)	81
R9 (Red Value)	-4
R13 (Skin Tones)	81
Beam Angle	120°
Light Distribution	Type VS
BUG Rating (Backlight, Uplight, and Glare)	B5 - U3 - G3
Dimmable Lighting Control	From optional 12VDC sensor, or customer 0-10V controls.

**ENVIRONMENT**

Operating Temperature	-4° ~ 122°F
Suitable Location	<b>DAMP</b>
Ingress Protection Rating	IP40

**LIFESPAN**

Average Life (Hours)	50,000
Warranty (Years)	<b>5</b>

**COMPONENTS**

LED Light Source	Bridgelux
Driver	SIL100-I2200 & SIL100-I2200DIS
Sensor Socket	12VDC AUX.

**CONSTRUCTION**

Housing	24 Gauge C.R.S.
Lens	Acrylic (PMMA)
Base / Power Supply	Hard Wired
Finish	White

**QUALIFICATIONS**



Visit [www.designlights.org/search](http://www.designlights.org/search) to confirm qualification. • Published lumens on LED products are approximate and may vary slightly. • Specifications are subject to change without notice.


Item#: **55722**  
**LED 4' TONE-SELECT™ LINEAR HIGH BAY**



ITEM INFORMATION

**DIMENSIONS** (Inches)

Length	46.5"
Width	22.9"
Height	2.2"
Net Weight (Lbs)	21.8
Chain Length	41.3" (2 ea.)

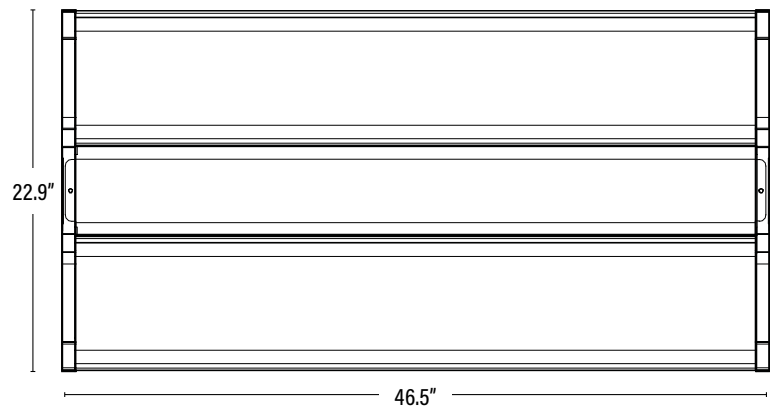

**SUPPORTING DOCUMENTS** (Grey = not available at this time.)

Product Sheet	VIEW
Install Instructions	VIEW
IES Download from Web Item	VIEW
LM79	VIEW
LM80	VIEW

**PACKAGING**

	UPC	DIMENSIONS (LxWxH)	GROSS WEIGHT (Lbs)	
Master Carton	1	811768024371	47.3" x 23.3" x 2.4"	--
Country of Origin	China			
HS Tariff	9405.10.6020			

**ORDERING**

ITEM#	DESCRIPTION	CASE
55722	LED 4FT TONE-SELECT™ LINEAR HL HIGH BAY/400W/40-50K/DIMM/ISO/120-277V - DLC®	1

**ACCESSORIES**

55219	PENDENT MOUNT FOR HL HIGH BAY	25
55708	PHOTO/MICROWAVE BI-LEVEL DIMMING SENSOR FOR POWER-SELECT™ HB	56
55709	REMOTE CONTROL FOR PHOTO/MICROWAVE MOTION SENSOR	150
55319	EMERGENCY PACK FOR LED FIXTURE 8W/90 MIN/INTEGRATION TYPE - <b>T20C</b> (For use with drivers that are 100W or less.)	6
55320	EMERGENCY PACK FOR LED FIXTURE 16W/90 MIN/INTEGRATION TYPE - <b>T20C</b> (For use with drivers that are 100W or less.)	6
55321	EMERGENCY PACK FOR LED FIXTURE 25W/90 MIN/INTEGRATION TYPE - <b>T20C</b> (For use with drivers that are 100W or less.)	6
55533	MOUNTING PLATE/INTEGRATED EM PACK FOR HL HIGH BAYS	100
45002	100FT ROLL NO. 12 JACK CHAIN	Per Foot

**REPLACEMENT PARTS**

SIL100-I2200	REPLACEMENT LED DRIVER	1
SIL100-I2200DIS	REPLACEMENT LED DRIVER	1

**ADDITIONAL INFORMATION:**

**Note:** When using an Emergency Pack with the fixture, cable mounting is recommended to control the balance of the fixture.