



TEST REPORT

For

P Q L INC

2285 WARD AVE SIMI VALLEY, CA 93065 United States

Model Number:	55784 LED 2X4 selectable CENTER BASKET TROFFER, 0-10V dimming, 29-34-39-49W selectable, CCT 3500K-4000K-5000K selectable, 120-277V input	
Report Type:	Electrical, Photometric and ISTMT tests according to the following standards and show the compliance to DLC Program SSL Technical Requirements V5.1	
Standards:	IES LM-79-08: Approved Method: Electrical & Photometric Measurement of Solid-state Lighting Products ANSI C82.77-10-2014: Harmonic Emission Limits – Related Power Quality Requirements for Lighting ANSI/UL 1598-2008: Standard for Safety of Luminaires CIE 190:2010 Calculation and presentation of unified glare rating tables for indoor lighting luminaires IES TM-30-18: IES Method for Evaluating Light Source Color Rendition	
Project Engineer:	Sherry Gu	
Report Number:	PKS231023102-10	
Sample Size:	One sample was received on 2021-12-24 and used for testing.	
Test Date:	2022-01-21 to 2022-10-21	
Report Date:	2023-10-24	
Reviewed By:	Seven Xia/ EE Engineer	
Prepared By:	Bay Area Compliance Laboratories Corp. (Kunshan). No. 248 Chenghu Road, Kunshan, Jiangsu, People’s Republic of China Tel: +86-0512-86175000 Fax: +86-0512-88934268	

1. Product Information and Description[#]

Product Primary Use:	2x4 Luminaires for Ambient Lighting of Interior Commercial Spaces
Voltage and Frequency:	120-277VAC, 50/60Hz
LED Source Manufacturer:	Lumileds Holding B.V.
LED Source Model:	L128-xx80RA35000Q1
Driver Model:	SDU48CS120V42DN3A
Auxiliary Ballast Model:	NA
Auxiliary Housing Model:	NA
White Tunable:	Yes
Field-Adjustable Light Output:	Yes

Note:

- The applicant *P Q L INC* declared that their products are the same to the product in report# RKS211224017-10-1 and is authorized by original applicant to use their test data.
- All the data in previous report (RKS211224017-10-1) is shared in report.



2. Product Rated Values[#]

Test Model	CCT(K)	Light Output (lm)	Power(W)	Luminous Efficacy (lm/W)
55784 LED 2X4 selectable CENTER BASKET TROFFER, 0-10V dimming, 29-34-39-49W selectable, CCT 3500K-4000K-5000K selectable, 120-277V input	3500	6188.7	49	126.3
		5004	39	128
		4430	34	130
		3837	29	132
	4000	6560	49	134
		5299	39	136
		4688	34	138
		4056	29	140
	5000	6312	49	129
		5102	39	131
		4516	34	133
		3910	29	135

3. Test List

Test Model	CCT(K)	Power(W)	Test Item			
			Goniophotometer Test	Integrating Sphere Test	THDi and PF Test	In-Situ Temperature Measurement Test
55784 LED 2X4 selectable CENTER BASKET TROFFER, 0-10V dimming, 29-34-39-49W selectable, CCT 3500K-4000K-5000K selectable, 120-277V input	3500	49	Yes	Yes	Yes	Yes
	4000		NA	Yes	Yes	NA
	5000		NA	Yes	Yes	NA

4. Product Photo

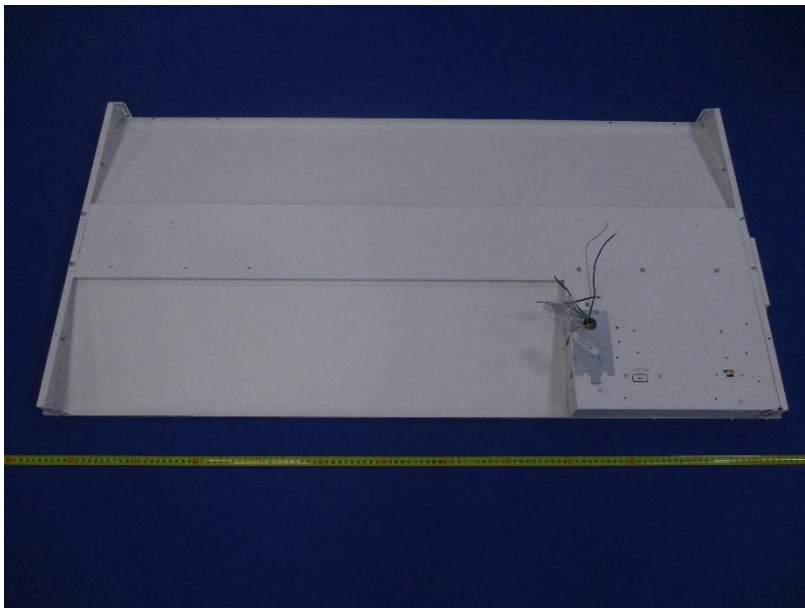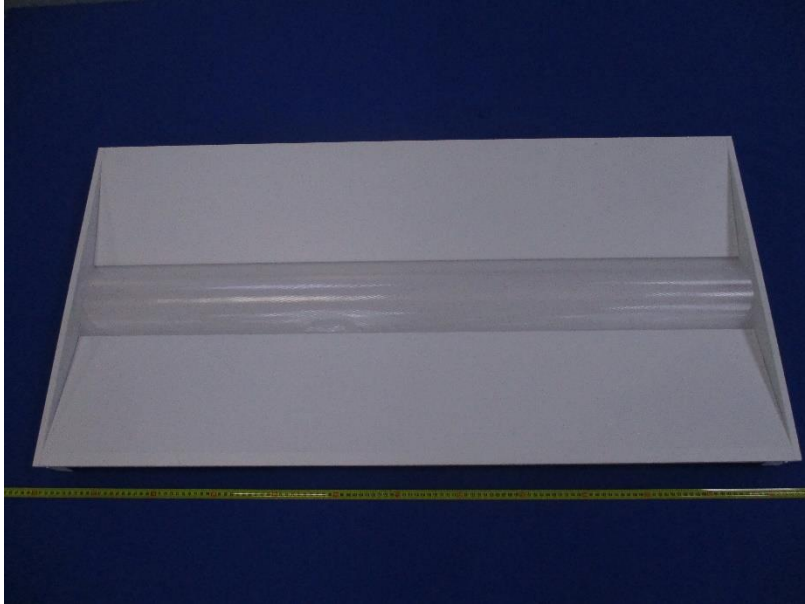

5. Test Result

Control Setting: 3500K, 49W

Integrating Sphere Test; Orientation: Downward; Test Voltage: 120V 60Hz:

Test Item	Test Result	DLC Requirements	DLC Requirements(With tolerances only)	Conclusion
Light Output(lm)	6276.9	≥3000	≥2700	Pass
Power(W)	49.71	None.	None.	N/A
Total Efficacy(lm/W)	126.28	≥125	≥121.25	Pass
CCT(K)	3404	None ⁱ	None.	N/A
Duv	-0.000259	None ⁱ	None.	N/A
IES R _f	84	70	69	Pass
IES R _g	97	89	88	
IES Rcs,h1	-11%	-12%~23%	-13%~24%	
R _a	82.7	≥80	≥79	
R ₉	11	≥0	≥-1	

Note:

- i. White-tunable products are not required to meet the chromaticity requirements in DLC V5.1.

Goniophotometer Test; Orientation: Downward; Test Voltage: 120V 60Hz:

Test Item	Test Result	DLC Requirements	DLC Requirements(With tolerances only)	Conclusion
Light Output(lm)	6288.4	≥3000	≥2700	Pass
Power(W)	49.86	None.	None.	N/A
Total Efficacy(lm/W)	126.17	≥125	≥121.25	Pass
Zonal Lumen Distribution(0-60°)	84.59%	0-60°≥75%	0-60°≥72%	Pass
SC:0-180°	1.17	1.0≤SC≤2.0	0.9≤SC≤2.1	Pass
SC:90-270°	1.24	1.0≤SC≤2.0	0.9≤SC≤2.1	Pass
UGR crosswise view	15.7	<22	No tolerances	Pass
UGR endwise view	20.9	<22	No tolerances	Pass

Goniophotometer THDi, PF Test; Orientation: Downward:

Test Voltage	Test Item	Test Result	DLC Requirements	DLC Requirements(With tolerances and/or allowances)	Conclusion
120	Power Factor	0.9995	≥0.9	≥0.87	Pass
120	THDi	7.01%	≤20%	≤25%	Pass
277	Power Factor	0.9792	≥0.9	≥0.87	Pass
277	THDi	9.77%	≤20%	≤25%	Pass

Integrating Sphere THDi, PF Test; Orientation: Downward:


Test Voltage	Test Item	Test Result	DLC Requirements	DLC Requirements(With tolerances and/or allowances)	Conclusion
120	Power Factor	0.998	≥0.9	≥0.87	Pass
120	THDi	7.19%	≤20%	≤25%	Pass
277	Power Factor	0.9794	≥0.9	≥0.87	Pass
277	THDi	9.78%	≤20%	≤25%	Pass

In-Situ Temperature Measurement Test: Test Voltage: 120V 60Hz;

Test Item	Test Result	DLC Requirements	DLC Requirements(With tolerances and/or allowances)	Conclusion
TMP _{LED} (°C)	37.6	≤115	With tolerance of ≤ 1.1°C or 0.4%, whichever is greater due to thermocouple tolerance	Pass
TMP _c (°C)	70.4	≤75	With tolerance of ≤ 1.1°C or 0.4%, whichever is greater due to thermocouple tolerance	Pass
Drive Current/Individual LED source(mA)	101.8	≤150	With +5% tolerance	Pass
L ₉₀ Lumen Maintenance Life (Hours)	51000	≥36000	None.	Pass
Color Maintenance	0.002	≤0.004	≤0.0044	Pass

Note:

1. The test results were measured directly from the test equipment.
2. The DLC requirements were listed according to DLC Technical Requirements V5.1.
3. The conclusion is for reference only. Test report that indicate product performance meets DLC Technical Requirements do not represent official DLC product qualification. All decisions regarding product qualification are made by the DLC.

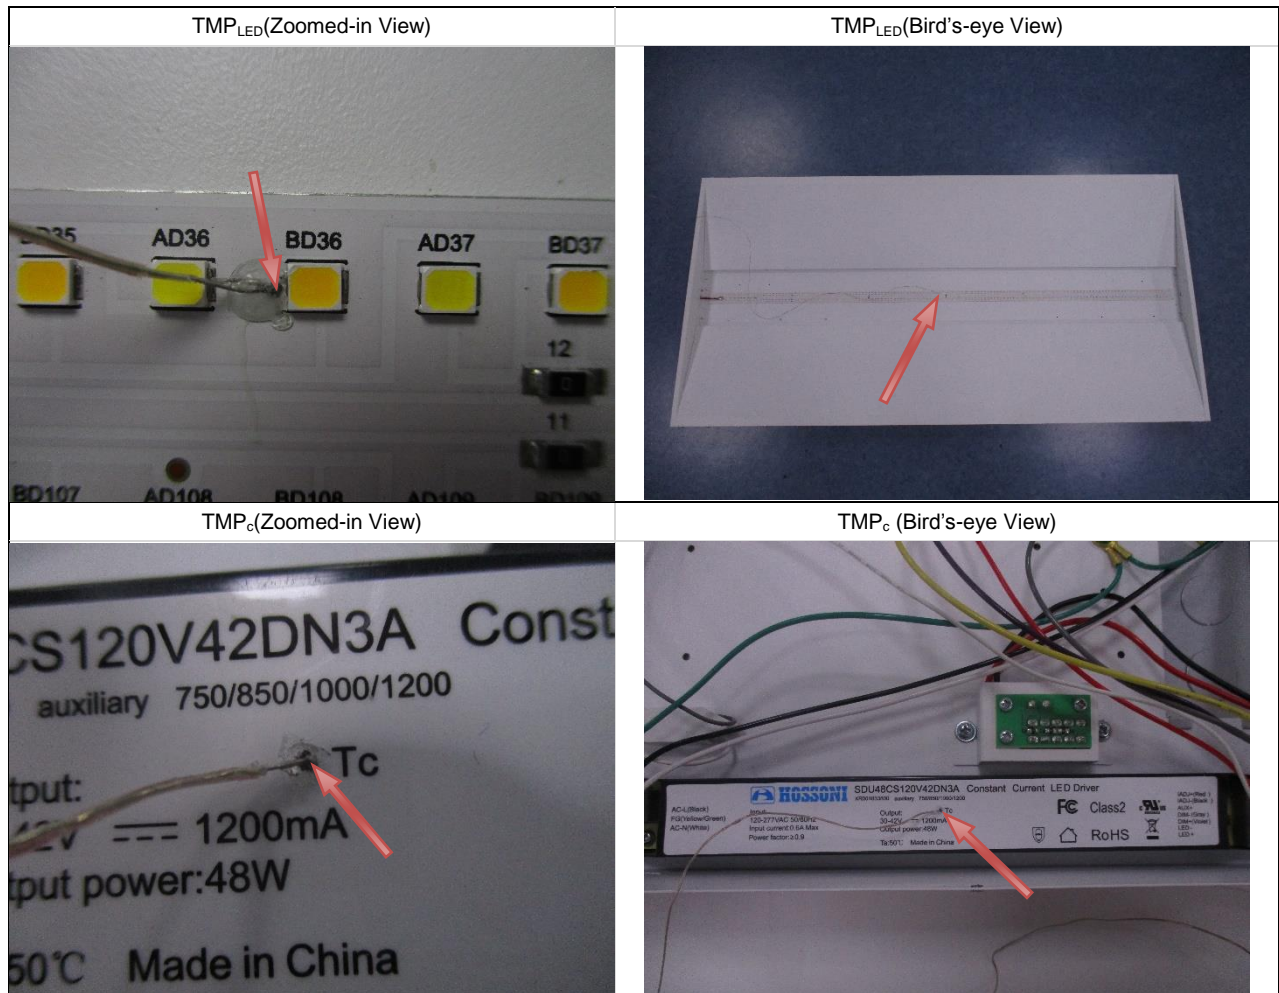

Test Data

[Integrating Sphere System]


Photometric and Electrical Measurement Result

Voltage (V)	Frequency (Hz)	Current (A)	Power (W)	Power Factor	Luminous Flux(lm)	Efficacy (lm/W)
119.9	60	0.4154	49.71	0.9979	6276.9	126.28

Radiant Flux (W)	CCT (K)	Duv	x	y	u'	v'
19.033	3404	-0.000259	0.4105	0.3927	0.2383	0.5128

Color Rendering Index







Ra			
82.7			
R1	R2	R3	R4
81	89	95	82
R5	R6	R7	R8
81	85	85	64
R9	R10	R11	R12
11	73	81	64
R13	R14	R15	
83	97	75	

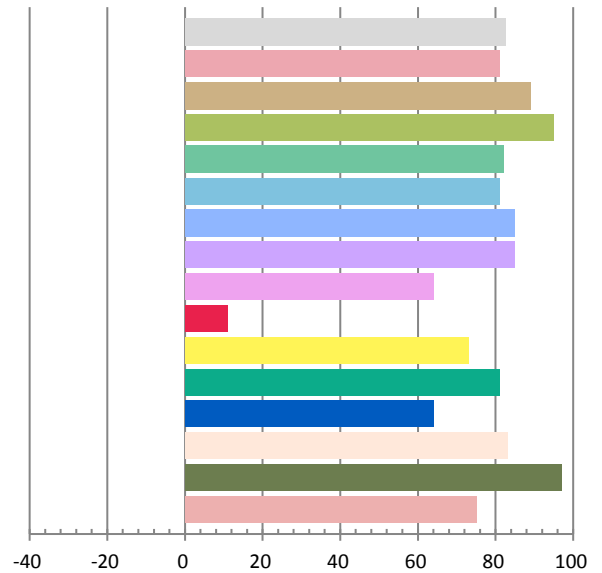

ANSI/IES TM-30-18 Color Rendition Report

Source: User SPD
Date: 2021/1/21

Manufacturer: P Q L INC
Model: 55784
LED 2X4 selectable CENTER BASKET TROFFER,
0-10V dimming, 29-34-39-49W selectable, CCT
3500K-4000K-5000K selectable, 120-277V
input

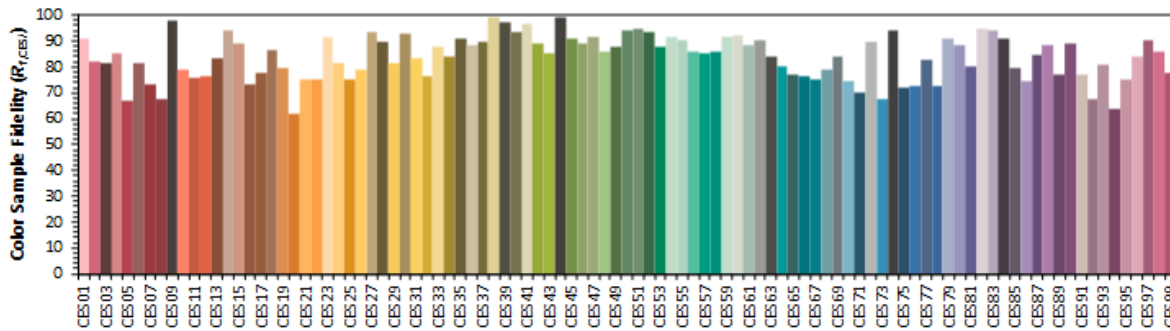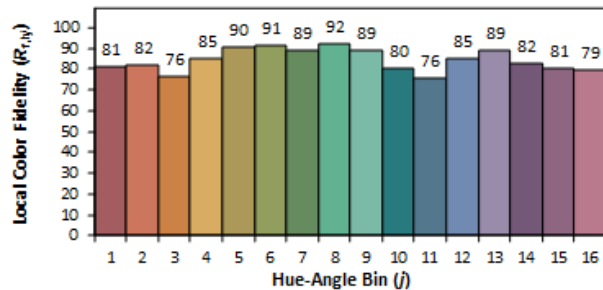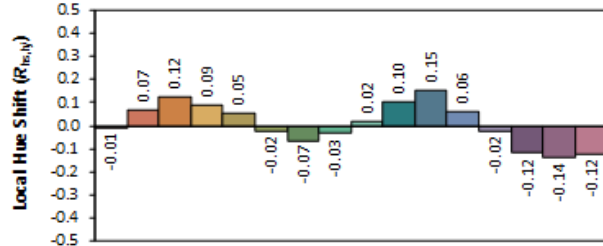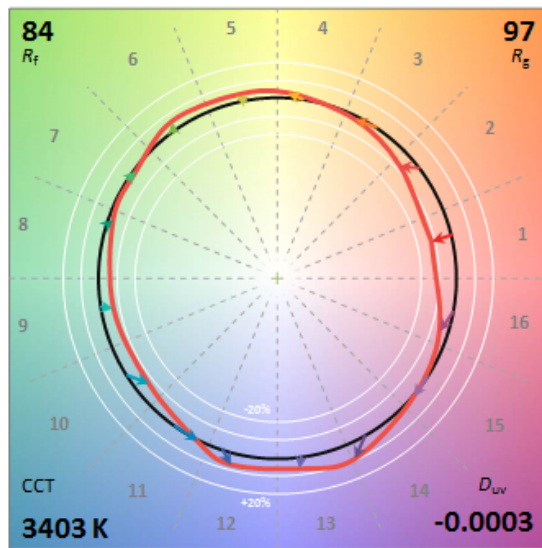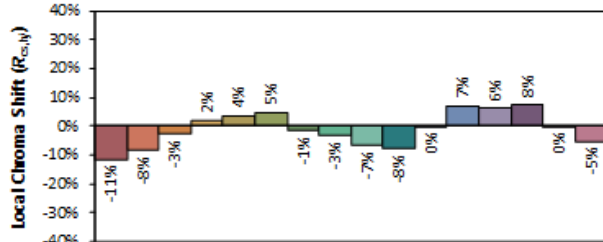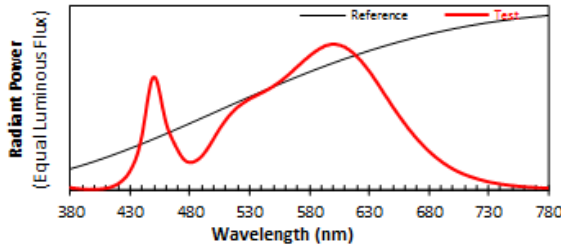


Notes: This is a recommended method for displaying ANSI/IES TM-30-18 information.

x 0.4105
 y 0.3925
 u' 0.2383
 v' 0.5128


CIE 13.3-1995 (CRI)	
R_a	83
R_g	11

Colors are for visual orientation purposes only. Created with the ANSI/IES TM-30-18 Calculator Version 2.00.


Relative Spectral Power Distribution

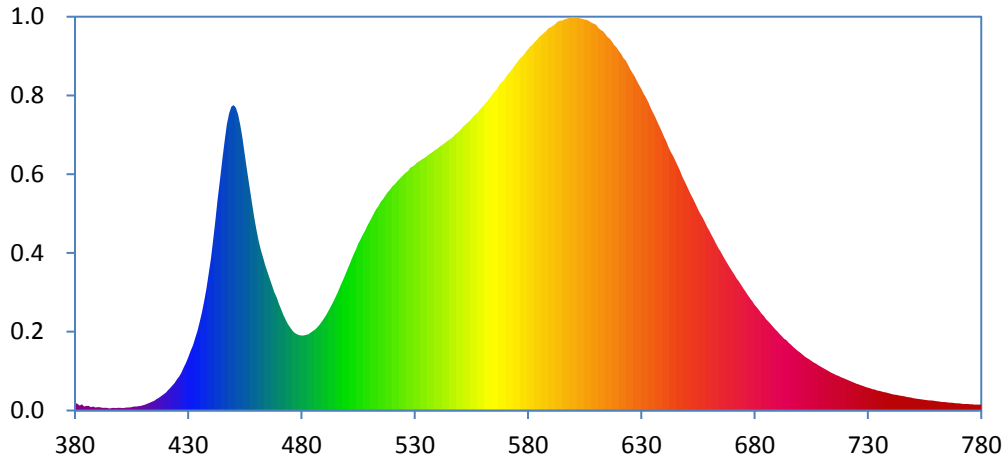

CIE 1931 x y Chromaticity Diagram

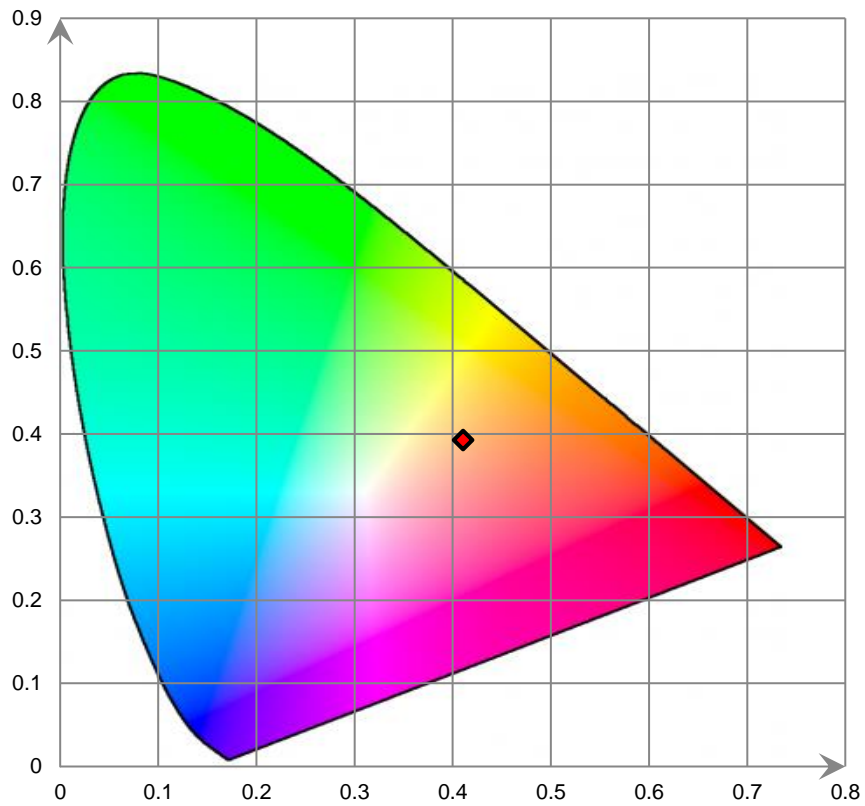

ANSI C78.377-2017 Chromaticity Quadrangles

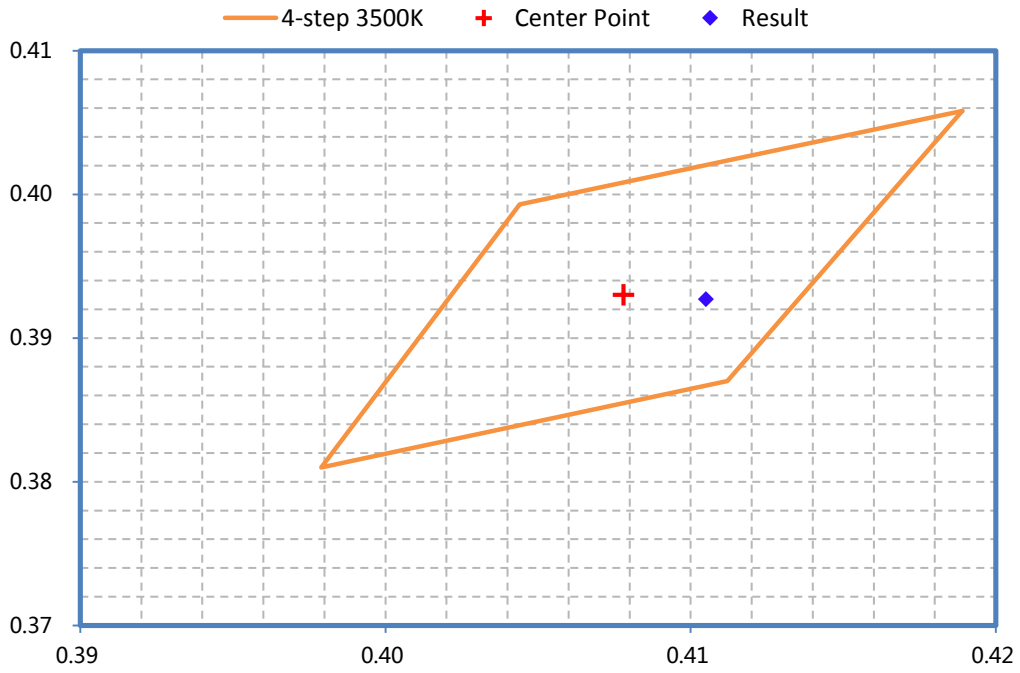

[Goniophotometer System]


Electrical Measurement

Input Voltage (V)	Frequency (Hz)	Input Current (A)	Power (W)	Power Factor
120.0	60	0.415	49.86	0.999

Photometric Measurement

Luminous Flux (lm)	Efficacy (lm/W)	I _{max} (cd)	S/MH (C0/180)	S/MH (C90/270)
6288.4	126.17	2700.5	1.17	1.24

Luminous Intensity Distribution

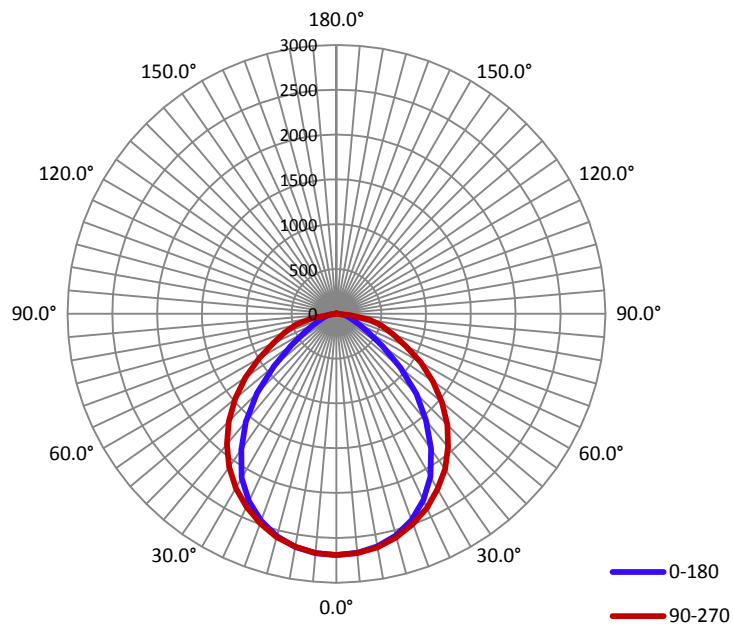

	C0/180	C45/225	C90/270	C135/315	AVG.
Beam Angle (50% I _{max}):	87.3	97.2	107.0	96.7	97.1
Field Angle (10% I _{max}):	129.8	151.9	162.7	151.1	148.9

Luminous Intensity (cd) Distribution Data

$\begin{matrix} C \\ \backslash \\ Y \end{matrix}$	0°	22.5°	45°	67.5°	90°	112.5°	135°	157.5°
0.0°	2691.4	2691.4	2691.4	2691.4	2691.4	2691.4	2691.4	2691.4
5.0°	2677.7	2681.9	2680.5	2683.5	2678.2	2683.9	2684.3	2682.8
10.0°	2635.7	2634.6	2634.1	2641.8	2643.7	2649.6	2649.2	2646.2
15.0°	2559.3	2565.5	2564.2	2572.1	2583.2	2584.6	2585.7	2584.1
20.0°	2449.3	2453.6	2471.5	2475.9	2494.7	2493.0	2487.3	2477.1
25.0°	2293.4	2314.1	2333.1	2351.7	2389.7	2371.8	2359.0	2337.8
30.0°	2099.1	2133.7	2176.3	2210.7	2258.0	2223.9	2198.5	2166.6
35.0°	1838.7	1901.5	1992.7	2046.1	2112.1	2060.3	2018.5	1934.7
40.0°	1552.0	1631.5	1780.6	1862.1	1936.9	1880.5	1811.3	1664.4
45.0°	1261.1	1348.9	1540.8	1665.7	1751.0	1681.2	1568.3	1373.3
50.0°	929.5	1069.8	1276.3	1444.6	1539.1	1455.9	1303.4	1075.3
55.0°	632.4	797.0	1022.2	1213.1	1316.9	1222.1	1041.5	786.4
60.0°	406.2	562.9	788.7	980.0	1086.9	983.5	799.1	553.0
65.0°	270.2	393.2	590.8	760.1	854.0	755.5	597.9	388.0
70.0°	191.3	284.7	418.9	568.9	675.0	556.2	431.4	280.7
75.0°	138.7	216.9	294.7	419.0	528.9	406.3	304.4	213.3
80.0°	102.8	157.2	201.1	291.2	381.3	280.6	213.1	156.3
85.0°	59.9	95.7	102.6	95.9	146.6	102.3	119.3	99.2
90.0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1.0
95.0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
100.0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
105.0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
110.0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
115.0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
120.0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
125.0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
130.0°	0.0	0.0	0.0	0.0	0.0	0.0	0.8	0.0
135.0°	0.7	0.9	1.5	0.7	1.4	1.0	1.3	0.7
140.0°	1.3	1.9	2.2	1.6	1.7	1.4	1.8	1.5
145.0°	2.2	2.7	3.1	2.4	2.9	2.7	2.7	1.9
150.0°	2.4	3.2	3.7	3.9	3.7	3.6	3.6	2.8
155.0°	2.8	3.3	4.4	3.7	4.4	4.4	4.0	3.2
160.0°	2.9	4.0	4.8	3.8	4.5	4.4	4.3	3.8
165.0°	3.7	4.1	4.4	4.3	4.9	4.2	5.2	4.3
170.0°	4.2	4.0	4.8	5.1	5.3	5.4	5.4	4.8
175.0°	4.0	4.5	5.3	5.1	5.6	4.9	5.5	5.0
180.0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Luminous Intensity (cd) Distribution Data (cont.)

$\begin{matrix} C \\ \backslash \\ Y \end{matrix}$	180°	202.5°	225°	247.5°	270°	292.5°	315°	337.5°
0.0°	2691.4	2691.4	2691.4	2691.4	2691.4	2691.4	2691.4	2691.4
5.0°	2680.8	2682.5	2682.8	2676.4	2681.0	2673.4	2676.7	2675.6
10.0°	2641.0	2646.4	2637.8	2638.6	2639.0	2623.8	2618.3	2630.1
15.0°	2567.3	2573.1	2568.2	2565.1	2577.0	2550.1	2542.6	2551.9
20.0°	2457.7	2467.1	2462.3	2466.6	2487.5	2447.3	2441.9	2442.0
25.0°	2307.6	2323.3	2330.1	2343.7	2374.8	2328.8	2305.6	2290.5
30.0°	2114.8	2148.1	2168.1	2199.3	2244.0	2178.7	2139.0	2098.9
35.0°	1851.5	1925.8	1993.3	2029.0	2085.2	2009.5	1949.1	1862.7
40.0°	1572.2	1654.9	1783.4	1840.9	1901.3	1815.2	1733.2	1584.5
45.0°	1253.7	1373.4	1538.0	1625.6	1694.9	1606.1	1483.8	1300.0
50.0°	911.1	1067.2	1272.0	1399.7	1473.1	1378.3	1219.0	1007.4
55.0°	616.4	780.7	1008.8	1158.4	1237.0	1137.3	960.3	732.6
60.0°	395.1	551.2	771.4	917.1	993.4	900.0	726.7	509.4
65.0°	263.4	387.1	566.0	691.6	775.2	679.1	526.4	353.7
70.0°	188.1	279.1	398.6	506.1	614.4	496.9	367.2	258.9
75.0°	136.2	209.8	281.1	361.9	464.5	353.8	255.9	195.8
80.0°	96.7	154.2	190.8	210.4	275.6	202.6	171.0	140.6
85.0°	63.7	92.9	65.1	26.6	14.3	22.6	53.7	76.5
90.0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
95.0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
100.0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
105.0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
110.0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
115.0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
120.0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
125.0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
130.0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
135.0°	0.0	0.0	0.0	0.0	0.0	1.0	0.8	0.8
140.0°	0.0	1.0	0.8	1.4	1.8	1.6	1.5	1.3
145.0°	1.3	2.0	1.4	2.0	2.7	2.3	2.4	2.2
150.0°	1.4	2.6	2.1	2.6	3.8	3.0	3.0	3.2
155.0°	2.2	2.9	2.7	3.6	4.2	3.9	3.7	3.8
160.0°	2.7	3.5	3.9	3.8	4.2	4.3	4.2	4.4
165.0°	3.3	4.2	4.5	4.6	4.8	4.6	4.4	4.7
170.0°	4.0	4.6	4.8	5.4	5.6	5.7	5.2	5.5
175.0°	4.0	4.7	4.8	6.1	5.8	6.2	5.6	4.7
180.0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Control Setting: 4000K, 49W

Integrating Sphere Test: Orientation: Downward; Test Voltage: 120V 60Hz:

Test Item	Test Result	DLC Requirements	DLC Requirements(With tolerances only)	Conclusion
Light Output(lm)	6302.6	≥3000	≥2700	Pass
Power(W)	46.41	None.	None.	N/A
Total Efficacy(lm/W)	135.79	≥125	≥121.25	Pass
CCT(K)	3954	None ⁱ	None.	N/A
Duv	-0.000488	None ⁱ	None.	N/A
IES R _f	84	70	69	Pass
IES R _g	97	89	88	
IES Rcs,h1	-11%	-12%~23%	-13%~24%	
R _a	83.9	≥80	≥79	
R ₉	17	≥0	≥-1	

Note:

- i. White-tunable products are not required to meet the chromaticity requirements in DLC V5.1.

Integrating Sphere THDi、PF Test: Orientation: Downward;

Test Voltage	Test Item	Test Result	DLC Requirements	DLC Requirements(With tolerances and/or allowances)	Conclusion
120	Power Factor	0.9975	≥0.9	≥0.87	Pass
120	THDi	4.56%	≤20%	≤25%	Pass
277	Power Factor	0.9626	≥0.9	≥0.87	Pass
277	THDi	7.13%	≤20%	≤25%	Pass

Note:

1. The test results were measured directly from the test equipment.
2. The DLC requirements were listed according to DLC Technical Requirements V5.1.
3. The conclusion is for reference only. Test report that indicate product performance meets DLC Technical Requirements do not represent official DLC product qualification. All decisions regarding product qualification are made by the DLC.

Test Data

[Integrating Sphere System]


Photometric and Electrical Measurement Result

Voltage (V)	Frequency (Hz)	Current (A)	Power (W)	Power Factor	Luminous Flux(lm)	Efficacy (lm/W)
120.0	60	0.3876	46.41	0.9975	6302.6	135.79

Radiant Flux (W)	CCT (K)	Duv	x	y	u'	v'
19.393	3954	-0.000488	0.3821	0.3768	0.2262	0.5018

Color Rendering Index







Ra			
83.9			
R1	R2	R3	R4
83	89	93	84
R5	R6	R7	R8
83	84	87	68
R9	R10	R11	R12
17	73	83	62
R13	R14	R15	
84	96	78	

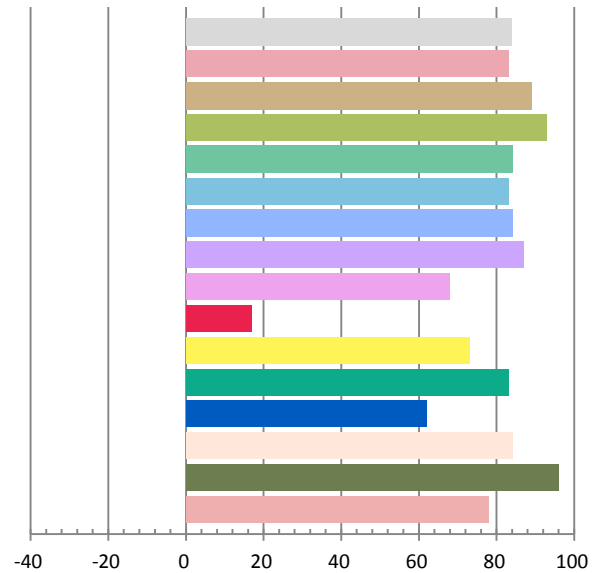

ANSI/IES TM-30-18 Color Rendition Report

Source: User SPD
Date: 2022/10/21

Manufacturer: P Q L INC
Model: 55784
LED 2X4 selectable CENTER BASKET TROFFER,
0-10V dimming, 29-34-39-49W selectable, CCT
3500K-4000K-5000K selectable, 120-277V
input

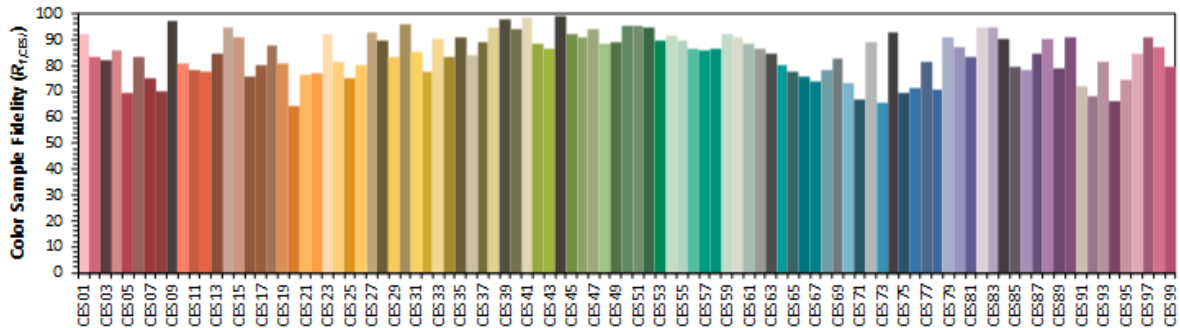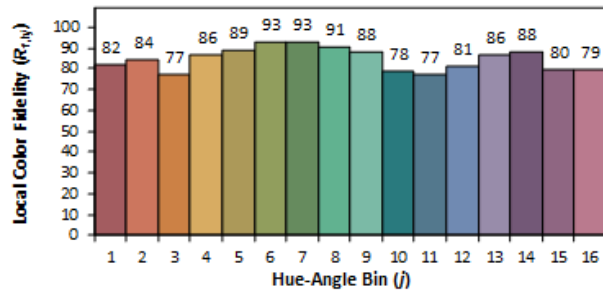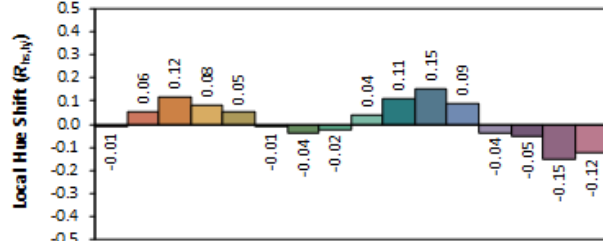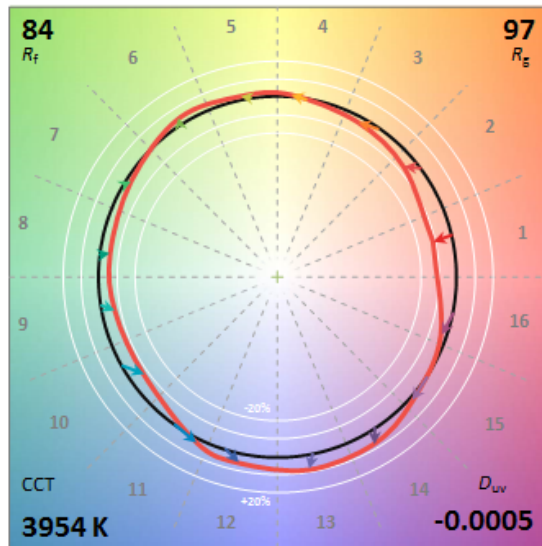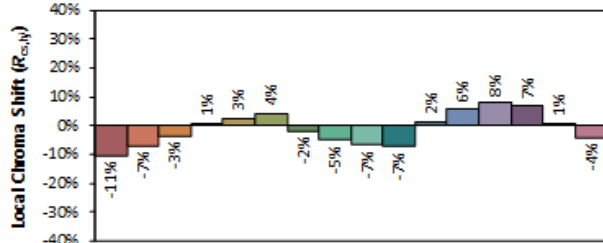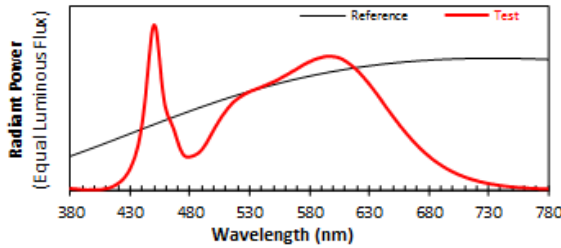


Notes: This is a recommended method for displaying ANSI/IES TM-30-18 information.

x 0.3821
 y 0.3766
 u' 0.2263
 v' 0.5018


CIE 13.3-1995 (CRI)	
R_a	84
R_9	17

Colors are for visual orientation purposes only. Created with the ANSI/IES TM-30-18 Calculator Version 2.00.


Relative Spectral Power Distribution

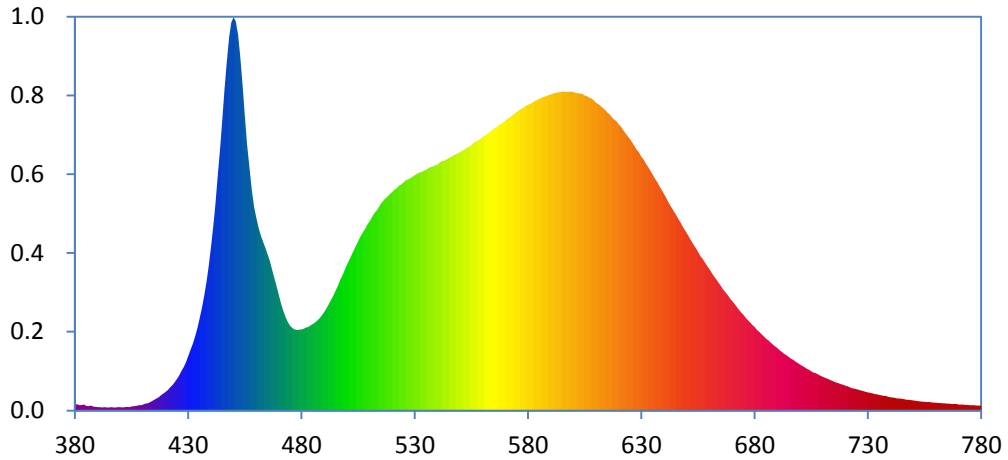

CIE 1931 x y Chromaticity Diagram

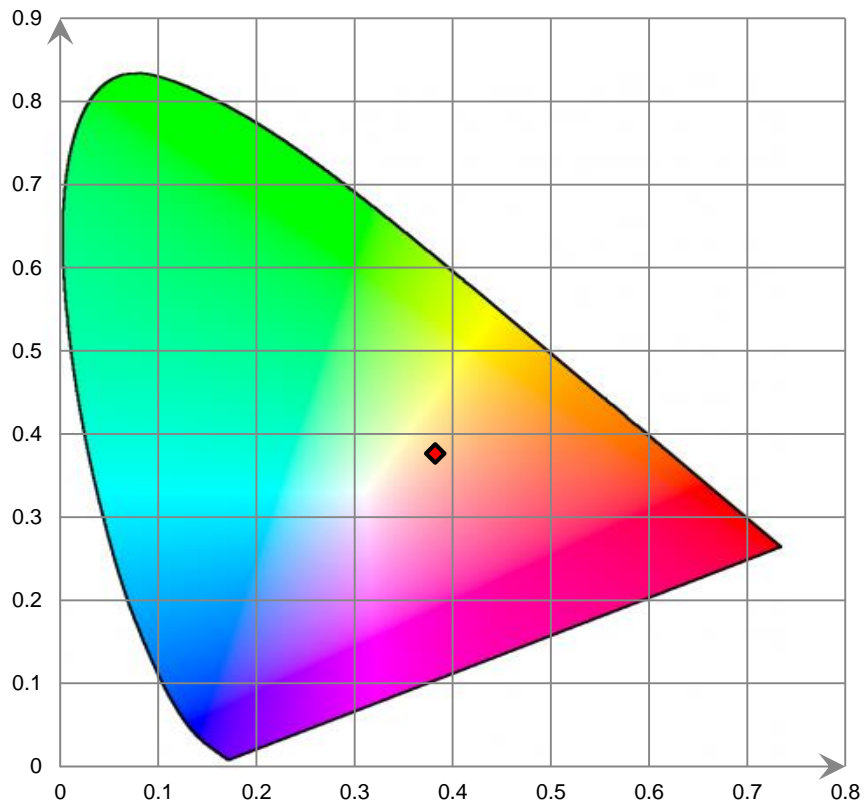

ANSI C78.377-2017 Chromaticity Quadrangles

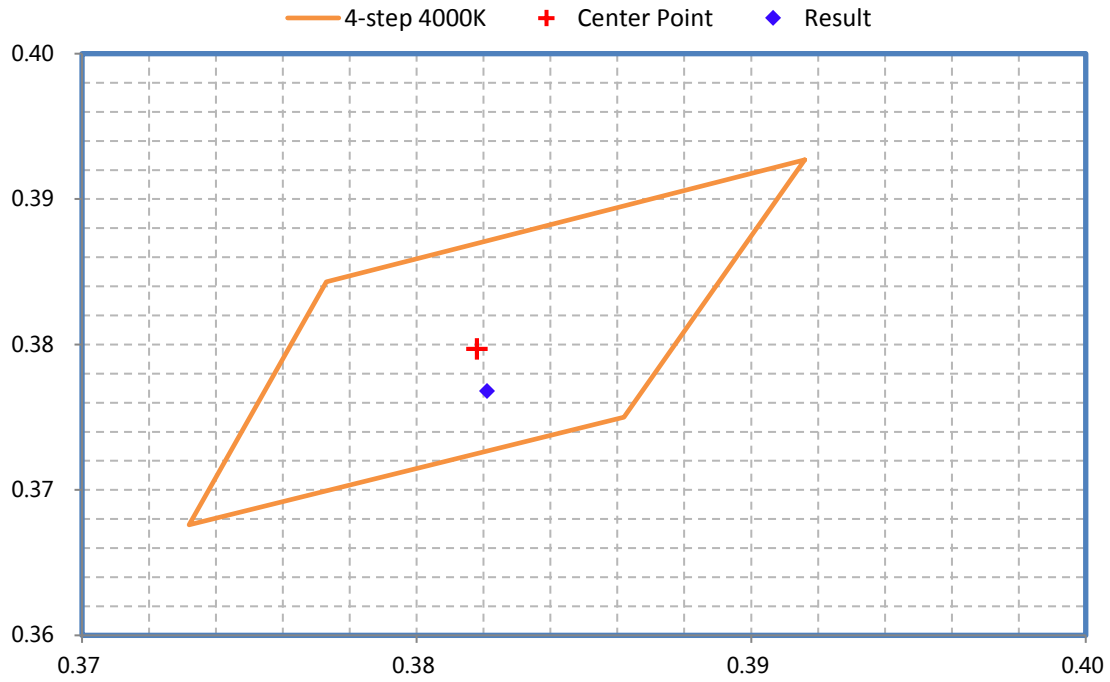

Control Setting: 5000K, 49W

Integrating Sphere Test: Orientation: Downward; Test Voltage: 120V 60Hz:

Test Item	Test Result	DLC Requirements	DLC Requirements(With tolerances only)	Conclusion
Light Output(lm)	6290.7	≥3000	≥2700	Pass
Power(W)	48.64	None.	None.	N/A
Total Efficacy(lm/W)	129.33	≥125	≥121.25	Pass
CCT(K)	4831	None ⁱ	None.	N/A
Duv	0.00212	None ⁱ	None.	N/A
IES R _f	84	70	69	Pass
IES R _g	97	89	88	
IES Rcs,h1	-11%	-12%~23%	-13%~24%	
R _a	83.1	≥80	≥79	
R ₉	13	≥0	≥-1	

Note:

- i. White-tunable products are not required to meet the chromaticity requirements in DLC V5.1.

Integrating Sphere THDi、PF Test: Orientation: Downward;

Test Voltage	Test Item	Test Result	DLC Requirements	DLC Requirements(With tolerances and/or allowances)	Conclusion
120	Power Factor	0.9975	≥0.9	≥0.87	Pass
120	THDi	4.40%	≤20%	≤25%	Pass
277	Power Factor	0.9628	≥0.9	≥0.87	Pass
277	THDi	7.06%	≤20%	≤25%	Pass

Note:

1. The test results were measured directly from the test equipment.
2. The DLC requirements were listed according to DLC Technical Requirements V5.1.
3. The conclusion is for reference only. Test report that indicate product performance meets DLC Technical Requirements do not represent official DLC product qualification. All decisions regarding product qualification are made by the DLC.

Test Data

[Integrating Sphere System]


Photometric and Electrical Measurement Result

Voltage (V)	Frequency (Hz)	Current (A)	Power (W)	Power Factor	Luminous Flux(lm)	Efficacy (lm/W)
120.0	60	0.4062	48.64	0.9975	6290.7	129.33

Radiant Flux (W)	CCT (K)	Duv	x	y	u'	v'
19.587	4831	0.00212	0.3506	0.3602	0.2118	0.4896

Color Rendering Index







Ra			
83.1			
R1	R2	R3	R4
82	87	91	83
R5	R6	R7	R8
82	82	88	70
R9	R10	R11	R12
13	69	82	58
R13	R14	R15	
83	95	77	

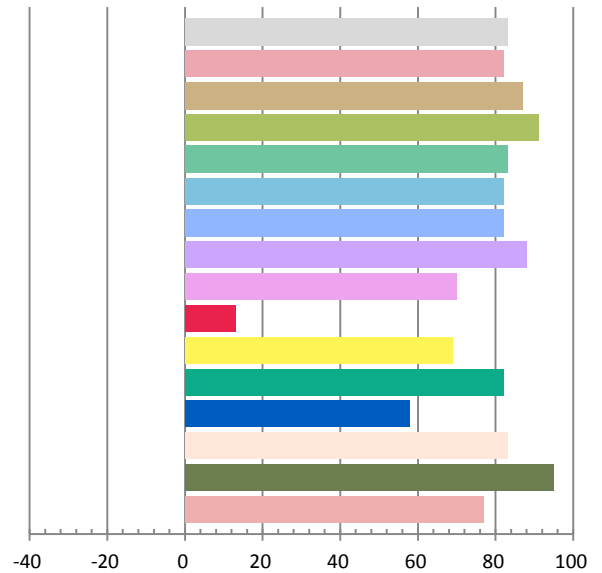

ANSI/IES TM-30-18 Color Rendition Report

Source: User SPD
Date: 2022/10/21

Manufacturer: P Q L INC
Model: 55784
LED 2X4 selectable CENTER BASKET TROFFER, 0-10V dimming, 29-34-39-49W selectable, CCT 3500K-4000K-5000K selectable, 120-277V input

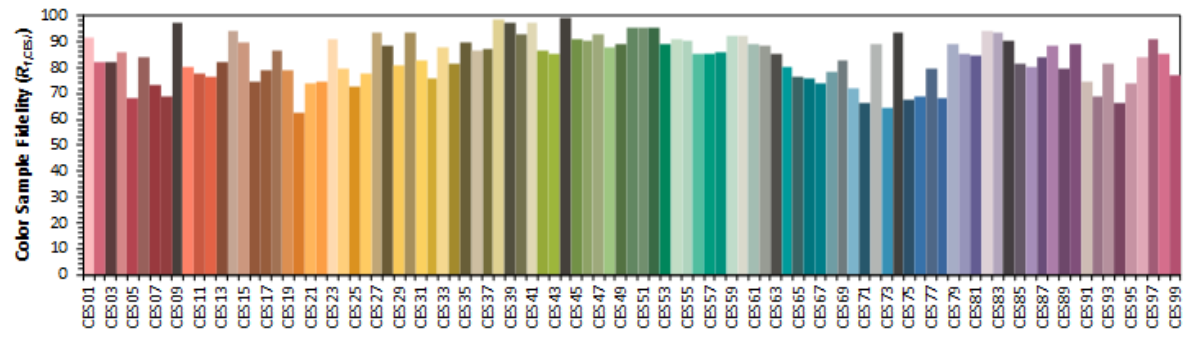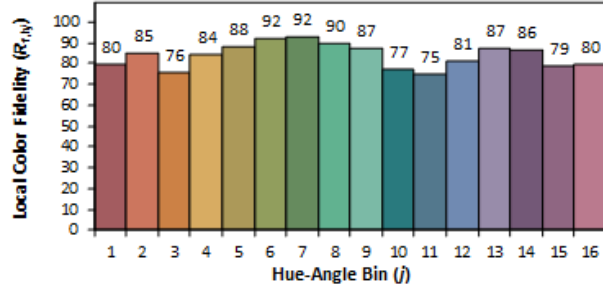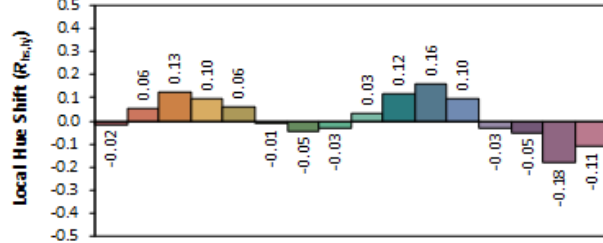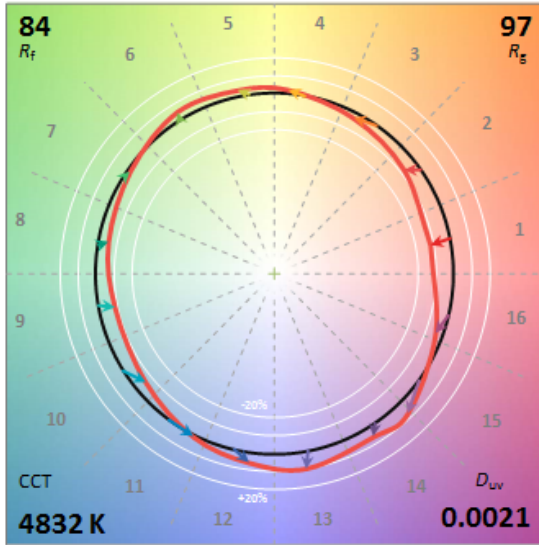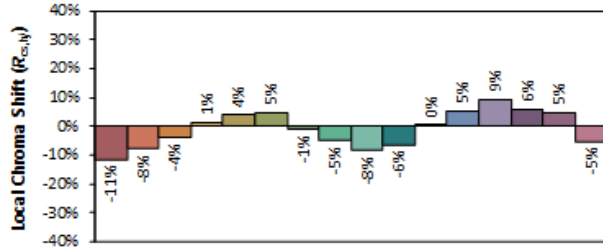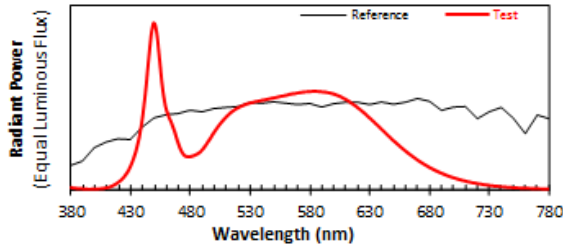


Notes: This is a recommended method for displaying ANSI/IES TM-30-18 information.

x 0.3505
 y 0.3601
 u' 0.2118
 v' 0.4895


CIE 13.3-1995 (CRI)
 R_a 83
 R_g 11

Colors are for visual orientation purposes only. Created with the ANSI/IES TM-30-18 Calculator Version 2.00.


Relative Spectral Power Distribution

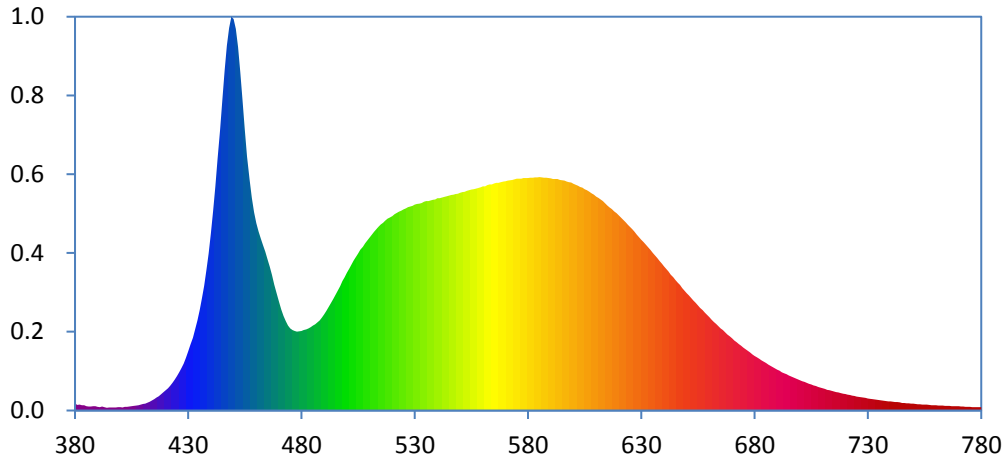

CIE 1931 x y Chromaticity Diagram

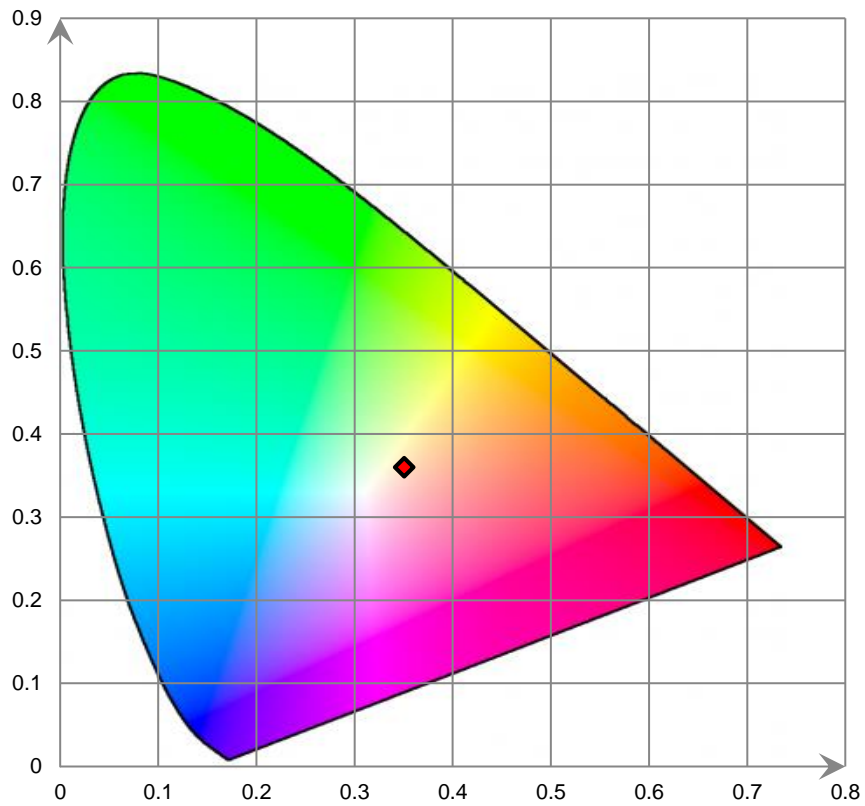

ANSI C78.377-2017 Chromaticity Quadrangles

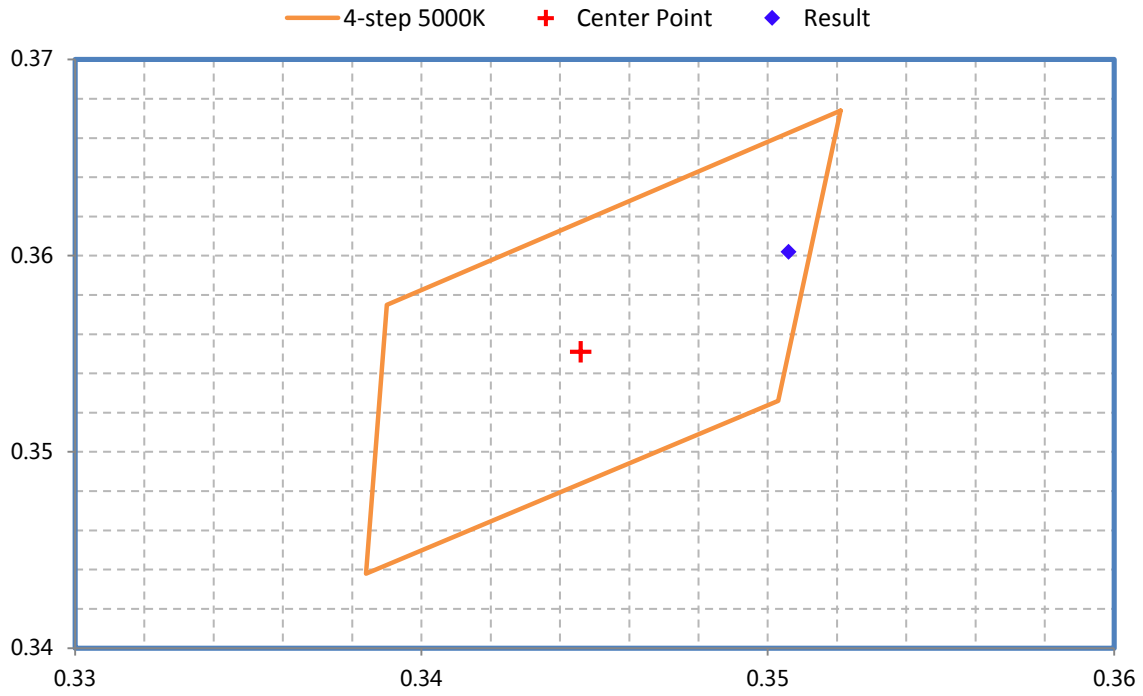

6. Description of Test Equipment

Device	Manufacture	Model No	Serial No	Calibration date	Calibration due date
2.0m integrating sphere	EVERFINE	R98	G121960CS1361154D	2021-11-02	2022-11-01
spectroradiometer	EVERFINE	HAAS-2000	M12048CS1361148	2021-11-02	2022-11-01
Digital CC&CV DC Power Supply	EVERFINE	WY305	G115986CN1361134	2021-11-02	2022-11-01
Thermal Meter	ANYMETRE	TH-20E	N/A	2021-12-01	2022-11-30
Standard Light Source	Osram	24V/50W	JWWCR020106	2021-09-15	2023-09-14
Digital Power Meter	YOKOGAWA	WT210	91KB35700	2021-11-13	2022-11-12
Intelligence ac power supply	EVERFINE	DPS1005	G119890CS1361121	2021-11-02	2022-11-01
AC Power Supply	INVENTFINE	CHP-5KVA	900511765	2021-11-02	2022-11-01
DC Power Supply	INVENTFINE	WL3010	JWDMP030001	2021-11-02	2022-11-01
Power Meter	INVENTFINE	WT500	GSDSQ200007	2021-11-15	2022-11-14
Goniophotometer	INVENTFINE	GPM-1900	YWGCF120001	2021-11-15	2022-11-14
Wireless Weather Station	ZHONGXING	KG218	N/A	2021-11-02	2022-11-01
Standard Light Source	INVENTFINE	N/A	JWBYR040008	2021-12-23	2022-12-22
Digital Multimeter	FLUKE	115C	37840512WS	2022-06-22	2023-06-21
Hybrid Recorder	YOKOGAWA	DR230	47JH0903	2021-11-02	2022-11-01
Power Supply	SC	SC/BP-11003	1608110030553	2021-11-15	2022-11-14

Statement of Traceability: Bay Area Compliance Laboratories Corp. (Kunshan) attested that all calibration has been performed using suitable standards traceable to National Primary Standards and International System of Units (SI).

7. Test Method

Product was tested with no seasoning. All stabilization and measurements were made in compliance with IES LM-79-08. The ambient temperature of the sample was maintained at 25°C±1°C during measurement. And relative humidity is less than 65%. The product was operated in its intended orientation in application during all testing.

Integrating Sphere System

The system includes AC power source, digital power meter, DC power supply, Spectroradiometer, and integrating sphere. The integrating sphere system is calibrated by standard spectrum light source before measurement. 4π geometry was used during measurement.

Goniophotometer System

Type C goniophotometer was used for measuring luminous intensity distribution. The vertical angle (γ) test intervals were set no more than 1 degree while data for 5 degree intervals is reported. The horizontal angle (C plane) test intervals were set no more than 22.5 degree.

ISTMT Test

The LED which has the highest temperature was measured at the location of LED case which is specified by LED source manufacturer and detailed by LM-80 report. The drive current of LED package/module/ array was calculated as the total output current of the driver measured by multimeter, divided by the number of branches in parallel of LEDs.

Directions

1. The information marked "superscript #" is provided by the applicant, the laboratory is not responsible for its authenticity and this information can affect the validity of the result in the test report.
2. This report may contain data that are not covered by the accreditation scope and shall be marked with an asterisk "★"
3. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.
4. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.
5. The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval.
6. This report cannot be reproduced except in full, without prior written approval of the Company.
7. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

*****END OF REPORT*****