



TECHNICAL DATA SHEET

FEATURES

- Better lumen maintenance
- Superior color rendition to HPS
- Maximized output with improved warm up time
- Reduced color shift and lamp to lamp color consistency


APPLICATION

Used in retail, commercial, and industrial lighting.


64190 HID EDX17 LAMP

PROTECTED PULSE START METAL HALIDE

PRODUCT DETAILS


ELECTRICAL	
Wattage	70W
ANSI Code	M98/O
LIGHTING PERFORMANCE	
Lumens	5500
Lumens Per Watt (Lm/W)	79
Dimmable Lighting Control	
ENVIRONMENT	
Operating Temperature	<200°C
Operating Position	Universal
Fixture Type	Open / Enclosed
CONSTRUCTION	
Housing	Glass
Base / Power Supply	E26 / Medium
Lens	Clear
Mercury Content (Hg)	11mg

LIFESPAN	
Average Life (Hours)	15,000
Warranty (Years)	1
PACKAGING	
Master Carton	12pc / 10854432004306
Individual Box	854432004309
Country of Origin	China
HS Tariff	8539.32.0020
DIMENSIONS	
Dimensions (Inches)	5.2" (L) x 2.1" (DIA)

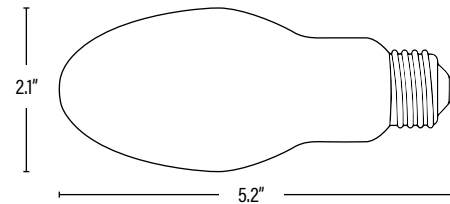

ORDERING

ITEM#	DESCRIPTION	CASE
64190	MP70/CL/U/4K/PS/EDX17/MED/M98 - SUPERIOR LIFE®	12

 This lamp contains mercury. For proper lamp disposal contact your local municipal solid waste agency directly, call 888-537-4874 or visit lamprecycle.org for state-specific lamp recycling options.

Published lumens on products are approximate and may vary slightly.

www.PQLighting.com

© P.Q.L., INC. • 2285 WARD AVENUE • SIMI VALLEY, CA 93065 • 800.323.8107 • FAX: 877.619.7053

GO GREEN 

1017