



83170-NP LED MINI WALL PACK

OUTDOOR WALL-MOUNTED AREA
LUMINAIRES


FEATURES

- Easy installation
- Replaces 25W HID
- Sealed die-casting profile for outdoor applications.
- Polycarbonate optical lens with UV stabilizers.

APPLICATION


- Security, pathway and perimeter lighting
- Building entry ways and walkways

PRODUCT DETAILS

ELECTRICAL	
Wattage	13W
Voltage	120V
Power Factor	0.9
Total Harmonic Distortion (THD)	N/A
LIGHTING PERFORMANCE	
Lumens	1200
Lumens Per Watt (Lm/W)	92
Color Temperature (CCT)	3000K
Color Rendering (CRI)	80
Beam Angle	180°
Light Distribution	Type IV, Very Short
Dimmable Lighting Control	
ENVIRONMENT	
Operating Temperature	-25°C ~ 40°C
Suitable Location	WET
Ingress Protection Rating	IP65
LIFESPAN	
Average Life (Hours)	50,000
Warranty (Years)	5
CERTIFICATIONS	



COMPONENTS	
LED Light Source	N/A
Driver	N/A
CONSTRUCTION	
Housing	Aluminum Alloy / PC
Base / Power Supply	Hard Wired
Finish	Black
PACKAGING	
Master Carton	12pc / 10811768026273
Individual Box	811768026276
Country of Origin	China
HS Tarrif	9405.40.6000
DIMENSIONS	
Dimensions (Inches)	8.4"(L) x 5.5"(W) x 3.2"(D)

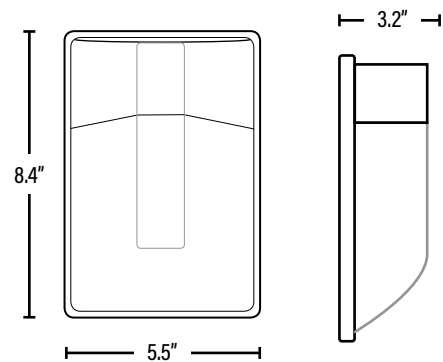

ORDERING

ITEM#	DESCRIPTION	CASE
83170-NP	LED MINI WALL PACK/BLACK/13W/30K/120V - SUPERIOR LIFE®	12
ACCESSORIES		
832258	REPLACEMENT LENS FOR MINI WALL PACKS	1

Published lumens on LED products are approximate and may vary slightly.

www.PQLighting.com

© P.Q.L., INC. • 2285 WARD AVENUE • SIMI VALLEY, CA 93065 • 800.323.8107 • FAX: 877.619.7053

GO GREEN