



PREMIUM QUALITY LIGHTING

83217PC

LED MINI WALL PACK/25W

TECHNICAL DATA SHEET



FEATURES



OUTDOOR WALL-MOUNTED AREA LUMINAIRES

- Easy installation
- Replaces 50W HID
- With photo cell

HOUSING

- Sealed die-casting profile for outdoor applications.
- Polycarbonate optical lens with UV stabilizers.
- Damp and Wet Locations

APPLICATION

- Security, pathway and perimeter lighting
- Building entry ways and walkways




SPECIFICATIONS

Power Consumption	25W
Input Voltage	120V
Power Factor	0.9
Lumens	2126
Luminous Efficiency	84 Lm/W
Color Temperature	4000K
CRI	83
Housing	Aluminum Alloy; Grade ADC12
Lens	PC Cover
Finish	Black
Dimensions (Inches)	8.4"(L) x 5.5"(W) x 3.2"(D)

LIFESPAN & ENVIRONMENT

Average Life	50,000
Operating Temperature	-25°C ~ 40°C

DIMENSIONS

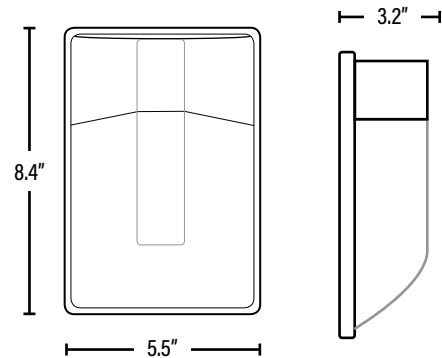

ORDERING

ITEM#	DESCRIPTION	WATTS	COLOR	LUMENS	CRI	VOLTS	HOUSING	HOURS	CASE
83217PC	LED MINI WALL PACK/BLACK/25W/40K/PHOTO CELL/120V - SL [®] DLC	25	4000K	2126	83	120	BLACK	50,000	12

Please check DLC website for the most current list of approved items • www.designlights.org
 Published lumens on LED products are approximate and may vary slightly.