



Item#: **83344**

LED CANOPY

PARKING GARAGE LUMINAIRES

FEATURES

- Ultra-thin design
- Replaces 100-175W MH

HOUSING

- One piece sealed die cast housing
- Heat resistant polycarbonate optical lens

MOUNTING

- Surface Mount with J-Box
- Pendant with 3/4" conduit


APPLICATION

Parking structures and storage areas

ELECTRICAL

Wattage	40W
Voltage	120-277V
Current	0.34A
Power Factor	0.9
Total Harmonic Distortion (THD)	15

LIGHTING PERFORMANCE

Lumens	5450
Lumens Per Watt (Lm/W)	136
Color Temperature (CCT)	5000K
Color Rendering (CRI)	70
R9 (Red Value)	-21
R13 (Skin Tones)	71
Beam Angle	160°
Light Distribution	Type VS
Dimmable Lighting Control	

ENVIRONMENT

Operating Temperature	-40° ~ 104°F
Suitable Location	WET
Ingress Protection Rating	IP65

LIFESPAN

Average Life (Hours)	50,000
Warranty (Years)	5

COMPONENTS

LED Light Source	Luxeon 3030 2D
Driver	LED-DR-50-W-XXX

CONSTRUCTION

Housing	Aluminum
Lens	PC
Base / Power Supply	Hard Wired
Finish	Black

QUALIFICATIONS



Visit www.designlights.org/search to confirm qualification. - Published lumens on LED products are approximate and may vary slightly.

PERFORMANCE DATA

PACKAGING


Item#: **83344**
LED CANOPY



DIMENSIONS (Inches)

Length	9.5"
Width/Diameter	9.5"
Height	3.2"
Weight (Lbs)	4.2

Line drawings may not be to scale and are for general reference only.

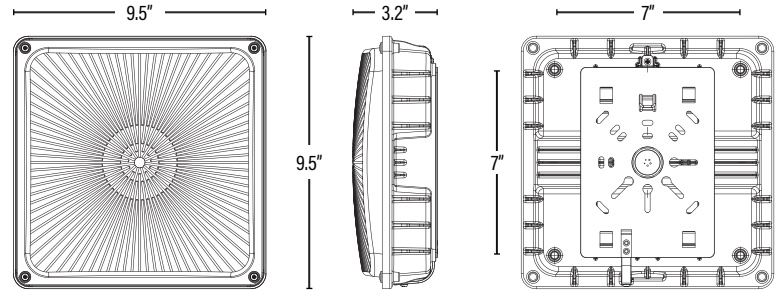

SUPPORTING DOCUMENTS (Grey = not available at this time.)

Product Sheet	VIEW
Install Instructions	VIEW
IES Download from Web Item	VIEW
LM79	VIEW
LM80	VIEW

PACKAGING

		UPC	DIMENSIONS (LxWxH)	GROSS WEIGHT (Lbs)
Master Carton	6	10811768025924	--	--
Individual Box	1	811768025927	--	--
Country of Origin	China			
HS Tariff	9405.40.6000			

ORDERING

ITEM#	DESCRIPTION	CASE
83344	LED CANOPY 40W/50K/120-277V/BLACK/V3 - SUPERIOR LIFE® DLC®	6

ACCESSORIES/REPLACEMENT PART

833448	REPLACEMENT LENS FOR V3 LED CANOPY	1
833446	REPLACEMENT DRIVER	1

ADDITIONAL INFORMATION:

Note: To prevent water damage which may shorten the life of an exterior mounted fixture; the fixture should be properly weather sealed according to the installation instructions or between the fixture base and mounting surface. Damage due to improper installation may void the warranty.

PERFORMANCE DATA

PACKAGING