



DLC V4.1 TEST REPORT

Applicant's name: P.Q.L., Inc.

Address: 2285 Ward Avenue / Simi Valley, CA 93065

Brand Name.....: Superior Life®

Report No......: BTR66.181.16.0027.51

Product Name.....: WALLPACK FIXTURE

Basic Model: 83364, 83365

Tested by
(printed name and signature): David Zhang 

Title: **Test Engineer**

Approved by
(printed name and signature): Steven Huo 

Title: **Approved Signatory**

Date of issue: Apr 18, 2017

Testing Laboratory Name: BEST Test Service Shenzhen Co., Ltd.

Address: 1st Floor, 1st Building, Weitai Industrial Park, Yingrenshi, Shiyan, Baoan, Shenzhen, China
TEL: + 86-755-28236006; FAX: + 86-755-23467087
Email: certification@bestcert.cn

Accreditation: DLC/Lighting Facts/UL/ETL/ELI/CEC/EPA/DOE
NVLAP Testing Lab Code: 200770-0

Test specification

Standard: DLC V4.1

Test procedure: DLC Test Procedure

Non-standard test method: No

Test Report Form No.: BEST_ DLC-V4.1

TRF originator.....: BEST Test Service Shenzhen Co., Ltd. Mr Tseng

Master TRF: BEST_ DLC V4.1.doc

Note:
This report is not valid as a BEST Test Report unless signed by an approved BEST Test Service Shenzhen Co., Ltd. This report shall not be reproduced except in full without the written approval of the testing laboratory. The test report only allows to be revised within the retention period unless further standard or the requirement was noticed. This report is for the exclusive use of BEST's Client and is provided pursuant to the agreement between BEST and its Client. BEST's responsibility and Liability are limited to the terms and conditions of the agreement. BEST assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the BEST name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by BEST. The observations and test results in this report are relevant only to the sample tested. This report by itself does not cover that the material, product, of service is or has ever been under a BEST certification program. National Voluntary Laboratory Accreditation Program (NVLAP) has accredited this laboratory under ISO17025: 2005 for specific laboratory activities as listed in the NVLAP directory of accredited laboratories. The results shown in this report were determined by this laboratory in accordance with its terms of accreditation. This report must not be used by the client to claim product endorsement by NVLAP or any agency of the U.S. Government.

| Product description: | |
|--|--|
| Sample received date | Apr 10, 2017 |
| Sample Quantity | 1 pcs per model |
| Model Number | 83364, 83365 |
| Rating(s) (V; Hz) | 120-277VAC 50/60HZ |
| Nominal Power..... | 50W |
| Nominal Power Factor | N/A |
| Nominal Lumen Output..... | 5600lm; 5700lm |
| Nominal CCT | 4000K; 5000K |
| Nominal CRI(Ra) | ≥70 |
| Nominal Life..... | 50000H |
| Product Classification | <input type="checkbox"/> Premium <input checked="" type="checkbox"/> Standard |
| Category..... | <input type="checkbox"/> Indoor <input type="checkbox"/> Indoor Retrofit Kit |
| | <input checked="" type="checkbox"/> Outdoor <input type="checkbox"/> Outdoor Retrofit Kit |
| | <input type="checkbox"/> Linear Replacement Lamp <input type="checkbox"/> E39 Replacements for HID Lamps |
| | <input type="checkbox"/> Four Pin-Base Replacement Lamps for CFLs |
| General Applicant | Outdoor –Mid Output |
| Primary use | Outdoor Full-Cutoff Wall-mounted Area Luminaires |
| Dimmable | <input checked="" type="checkbox"/> Yes, <input type="checkbox"/> No |
| If Yes, Select Dimming Mechanism | <input checked="" type="checkbox"/> Continuous dimming, <input type="checkbox"/> Step dimming |
| If Yes, Mini Dimming Level | 10% |
| Integral Controller | <input checked="" type="checkbox"/> Yes, <input type="checkbox"/> No |
| LED Lighting Source Manufacture | Lumileds |
| LED Lighting Source Model | LUXEON 3030 2D |
| LED Driver Brand..... | N/A |
| LED Driver Model Number..... | N/A |
| Maximum Recommended Temperature (°C) During Normal Operation | N/A |
| Fixtures Band (Retrofit Kit/Lamp Only) | N/A |
| Fixtures Model No. (Retrofit Kit/Lamp Only) | N/A |

Test Method Description

ANSI C78.376-2001 Specifications for the Chromaticity of Fluorescent Lamps
ANSI C78.377-2015 Specifications for the Chromaticity of Solid State Lighting Products
ANSI/NEMA/ANSLG C78.377-2011 Specifications for the Chromaticity of Solid State Lighting Products
ANSI C78.5-2003 Specifications for Performance of Self-ballasted Compact Fluorescent Lamps
ANSI/ANSLG C78.81-2010 Double-Capped Fluorescent Lamps—Dimensional and Electrical Characteristics
ANSI C78.901-2014 Single-Based Fluorescent Lamps—Dimensional and Electrical Characteristics
ANSI/ANSLG C81.61-2009 Specifications for Bases (Caps) for Electric Lamps
ANSI/ANSLG C81.62-2009 Lamp holders for Electric Lamps
ANSI C82.11-2011 High-Frequency Fluorescent Lamp Ballasts
ANSI/ANSLG C82.16-2015 (anticipated) Light Emitting Diode Drivers—Methods of Measurement
ANSI C82.2-2002 Method of Measurement of Fluorescent Lamp Ballasts
ANSI C82.77-10:2014 Harmonic Emission Limits—Related Power Quality Requirements for Lighting Equipment
ANSI/IEEE C62.41.1-2002 IEEE Guide on the Surge Environment in Low-Voltage (1000 V and Less) AC Power Circuits
ANSI/IEEE C62.41.2-2002 IEEE Recommended Practice on Characterization of Surges in Low-Voltage (1000V and Less) AC Power Circuits
ANSI/UL 153-2002 Standard for Safety of Portable Electric Luminaires
ANSI/UL 935-2009 Standard for Safety of Fluorescent-Lamp Ballasts
ANSI/UL 1310-2010 Standard for Safety of Class 2 Power Units
ANSI/UL 1574-2004 Standard for Safety of Track Lighting Systems
ANSI/UL 1598-2008 Standard for Safety of Luminaires
ANSI/UL 1598C Light-Emitting Diode (LED) Retrofit Luminaire Conversion Kits
ANSI/UL 1598B-2010 Standard for Supplemental Requirements for Luminaire Reflector Kits for Installation on Previously Installed Fluorescent Luminaires
ANSI/UL 1993-2009 Standard for Safety of Self-Ballasted Lamps and Lamp Adapters
ANSI/UL 2108-2004 Standard for Low-Voltage Lighting Systems
ANSI/UL 8750-2009 Standard for Light Emitting Diode (LED) Equipment for Use in Lighting Products
ASTM E283-04 Standard Test Method for Determining Rate of Air Leakage Through Exterior Windows, Curtain Walls, and Doors Under Specified Pressure Differences Across the Specimen
CIE Pub. No. 13.3-1995 Method of Measuring and Specifying Color Rendering of Light Sources
CIE Pub. No. 15:2004 Colorimetry
EU Directive 2002/95/EC Directive 2002/95/EC of the European Parliament and of the Council of 27 January 2003 on the Restriction of the Use of Certain Hazardous Substances In Electrical and Electronic Equipment
FCC CFR Title 47 Part 15 Radio Frequency Devices
FCC CFR Title 47 Part 18 Industrial, Scientific, and Medical Equipment
IEC 60061-1 (2012) Lamp Caps and Holders Together with Gauges for the Control of Interchangeability and Safety – Part 1: Lamp Caps
IEC 60081 Amend 4 Ed 5.0 (2010) Double-capped Fluorescent Lamps - Performance Specifications
IEC 60901 (2011) Single-capped Fluorescent Lamps - Performance Specifications
IEC 62301 ED.2.0 B:2011 Household electrical appliances - Measurement of standby power
IEC 61347-2-3-am2 ed1.0 b.2011 Amendment 2 - Lamp Control Gear - Part 2-3: Particular Requirements for A.C. Supplied Electronic Ballasts for Fluorescent Lamps
IEC 62321 Ed. 1.0 Electrotechnical Products - Determination Of Levels Of Six Regulated Substances (lead, mercury, cadmium, hexavalent chromium, polybrominated biphenyls, polybrominated diphenyl ethers)
IEEE PAR1789 IEEE Recommending Practices for Modulating Current in High Brightness LEDs for Mitigating Health Risks to Viewers
IES LM-9-09 Electric and Photometric Measurements of Fluorescent Lamps
IES LM-10-96 or LM-10-XX Photometric Testing of Outdoor Fluorescent Luminaires (2015 update anticipated)
IES LM-31-95 Photometric Testing of Roadway Luminaires Using Incandescent Filament and High Intensity Discharge (HID) Lamps
IES LM-40-10 Life Testing of Fluorescent Lamps
IES LM-41-14 Approved Method for Photometric Testing of Indoor Fluorescent Luminaires
IES LM-46-04 Photometric Testing of Indoor Luminaires Using High Intensity Discharge or Incandescent Filament Lamps
IES LM-49-12 Life Testing of Incandescent Filament Lamps
IES LM-58-13 Method for Spectroradiometric Measurement Methods for Light Sources
IES LM-65-14 Life Testing of Compact Fluorescent Lamps
IES LM-66-14 Electrical and Photometric Measurements of Single-Ended Compact Fluorescent Lamps
IES LM-79-08 Electrical and Photometric Measurements of Solid-State Lighting Products
IES LM-80-08 Measuring Lumen Maintenance of LED Light Sources
IES LM-82-12 Method for the Characterization of LED Light Engines and Integrated LED Lamps for Electrical and Photometric Properties as a Function of Temperature
IES LM-84-14 Measuring Luminous Flux and Color Maintenance of LED Lamps, Light Engines, and Luminaires
IES RP-16-10 Nomenclature and Definitions for Illuminating Engineering
IES TM-21-11 Projecting Long Term Lumen Maintenance of LED Sources
IES TM-28-14 Projecting Long-Term Luminous Flux Maintenance of LED Lamps and Luminaires
NEMA LL 9-2009 Dimming of T8 Fluorescent Lighting Systems
NEMA LSD 45-2009 Recommendations for Solid State Lighting Sub-Assembly Interfaces for Luminaires
NEMA SSL 7A-2013 Phase Cut Dimming for Solid State Lighting: Basic Compatibility

Initial Photometric and Electrical Test Data

| EUT | Input Voltage (V) | Frequency (Hz) | Input Current (A) | ITHD | Input Power (W) | Power Factor | Lumen Output (Lumens) | Efficiency Lumen/w |
|-------|-------------------|----------------|-------------------|-------|-----------------|--------------|-----------------------|--------------------|
| 83364 | 120.0 | 60.0 | 0.411 | 6.1% | 49.15 | 0.996 | 5668.00 | 115.32 |
| 83365 | 277.0 | 60.0 | 0.186 | 18.2% | 49.62 | 0.963 | / | / |

| EUT | CCT (K) | CRI Ra | R9 | x CIE1931 | y CIE1931 |
|-------|---------|--------|-----|-----------|-----------|
| 83364 | 4048 | 74.0 | -17 | 0.3765 | 0.3686 |
| 83365 | 5200 | 74.9 | -15 | 0.3396 | 0.3455 |

| EUT | u' CIE1976 | v' CIE1976 | Duv | Rf | Rg |
|-------|------------|------------|---------|----|----|
| 83364 | 0.2258 | 0.4973 | -0.0027 | 72 | 95 |
| 83365 | 0.2100 | 0.4808 | -0.0008 | 72 | 95 |


| EUT | Zonal Lumen Density zone (0-90°) | Zonal Lumen Density zone (80-90°)* |
|-------|----------------------------------|------------------------------------|
| 83364 | 100.0% | 0.4% |

Note:


1. See the annex of Luminous Intensity Distribution Test Plots

7 Step Quadrangle

83364

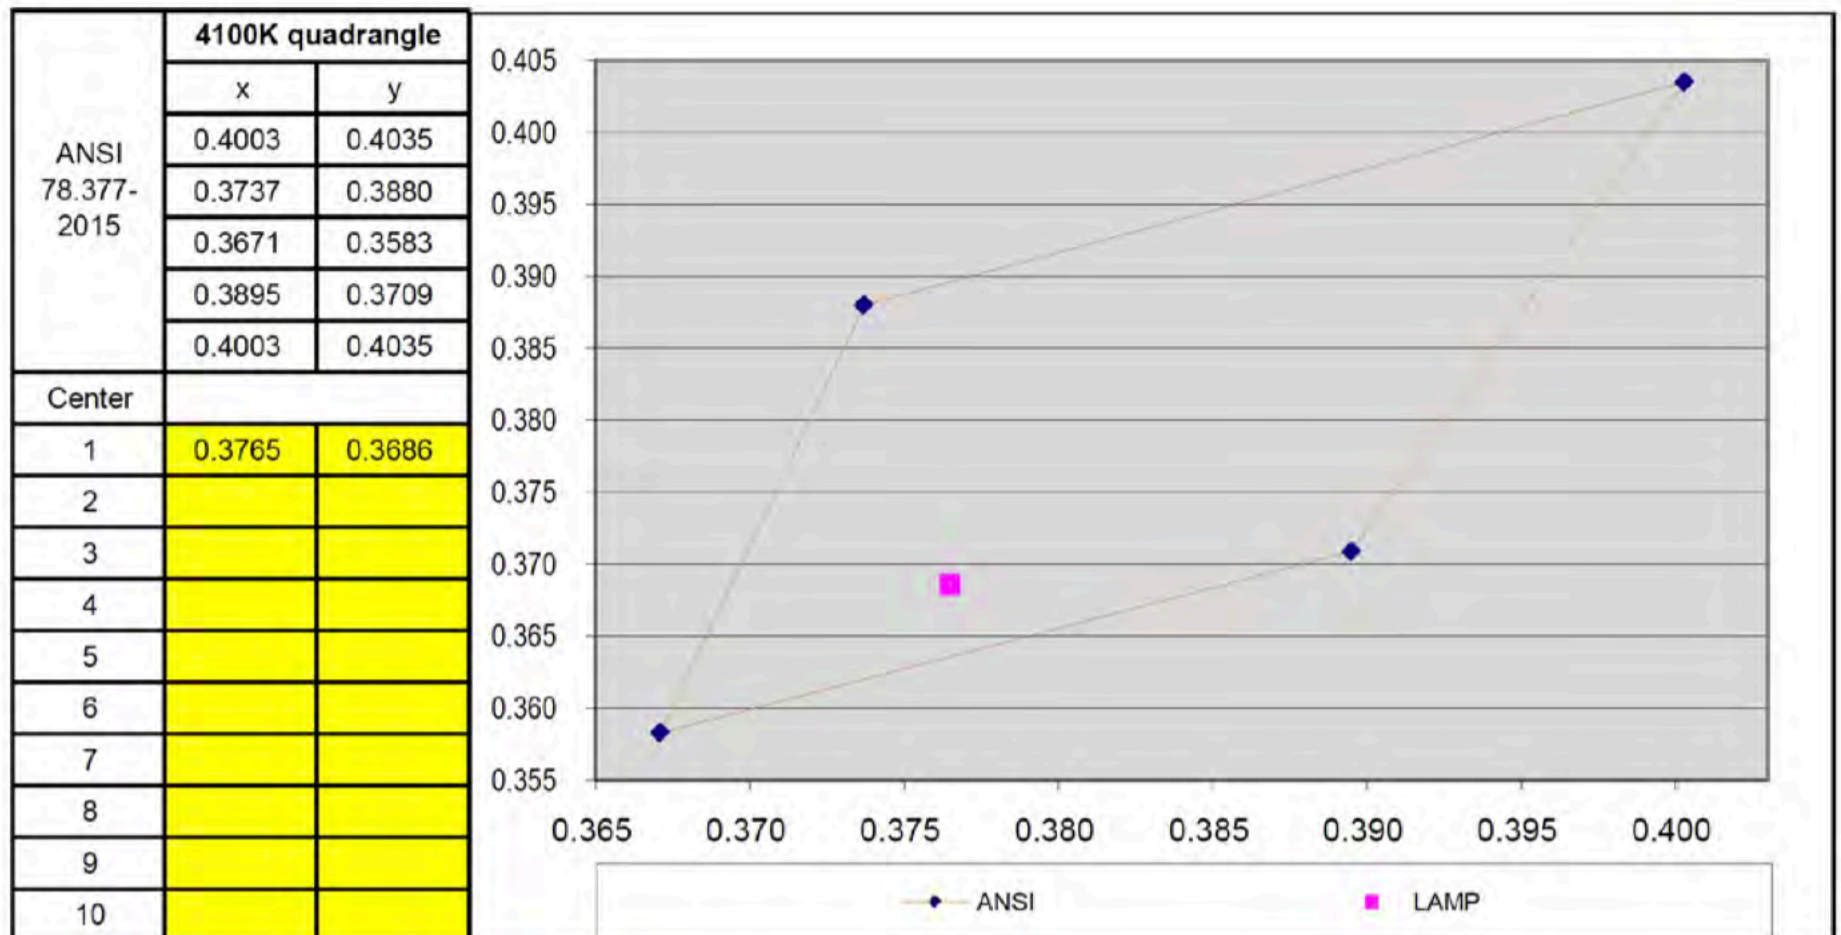

83365

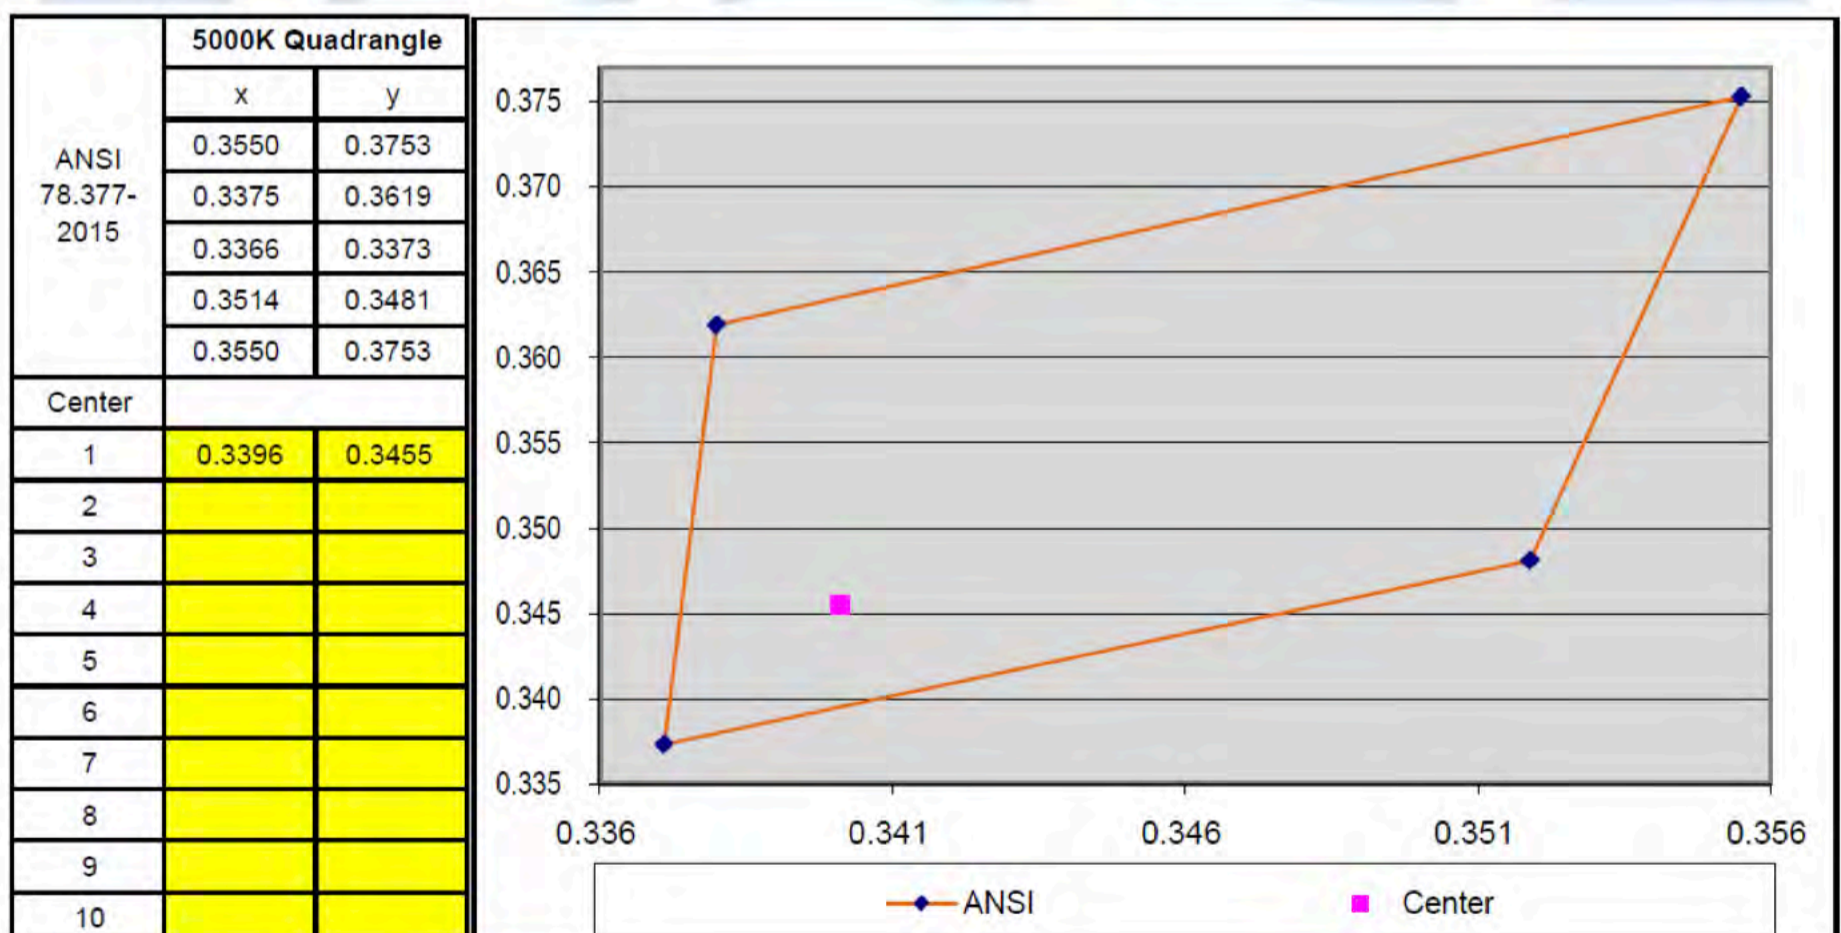

Spectral Energy Distribution

83364


| WL(nm) | Spectrum | Spectrum | WL(nm) | Spectrum | Spectrum |
|--------|----------|----------|--------|----------|----------|
| 380 | 0.0223 | 2.3190 | 585 | 0.8481 | 88.0300 |
| 385 | 0.0136 | 1.4100 | 590 | 0.8407 | 87.2600 |
| 390 | 0.0095 | 0.9823 | 595 | 0.8268 | 85.8200 |
| 395 | 0.0080 | 0.8350 | 600 | 0.8030 | 83.3500 |
| 400 | 0.0073 | 0.7581 | 605 | 0.7748 | 80.4300 |
| 405 | 0.0123 | 1.2790 | 610 | 0.7391 | 76.7100 |
| 410 | 0.0240 | 2.4940 | 615 | 0.6987 | 72.5200 |
| 415 | 0.0508 | 5.2750 | 620 | 0.6535 | 67.8300 |
| 420 | 0.0972 | 10.0900 | 625 | 0.6090 | 63.2100 |
| 425 | 0.1669 | 17.3200 | 630 | 0.5625 | 58.3900 |
| 430 | 0.2726 | 28.2900 | 635 | 0.5148 | 53.4400 |
| 435 | 0.4153 | 43.1000 | 640 | 0.4687 | 48.6500 |
| 440 | 0.6046 | 62.7500 | 645 | 0.4235 | 43.9600 |
| 445 | 0.8489 | 88.1100 | 650 | 0.3818 | 39.6300 |
| 450 | 0.9994 | 103.7000 | 655 | 0.3412 | 35.4100 |
| 455 | 0.7942 | 82.4400 | 660 | 0.3052 | 31.6700 |
| 460 | 0.5059 | 52.5100 | 665 | 0.2706 | 28.0900 |
| 465 | 0.3589 | 37.2500 | 670 | 0.2383 | 24.7400 |
| 470 | 0.2551 | 26.4800 | 675 | 0.2100 | 21.7900 |
| 475 | 0.1769 | 18.3600 | 680 | 0.1845 | 19.1500 |
| 480 | 0.1445 | 15.0000 | 685 | 0.1620 | 16.8100 |
| 485 | 0.1393 | 14.4600 | 690 | 0.1419 | 14.7200 |
| 490 | 0.1503 | 15.6000 | 695 | 0.1234 | 12.8100 |
| 495 | 0.1850 | 19.2000 | 700 | 0.1078 | 11.1900 |
| 500 | 0.2381 | 24.7100 | 705 | 0.0932 | 9.6740 |
| 505 | 0.3017 | 31.3200 | 710 | 0.0816 | 8.4660 |
| 510 | 0.3690 | 38.3000 | 715 | 0.0707 | 7.3350 |
| 515 | 0.4330 | 44.9500 | 720 | 0.0615 | 6.3850 |
| 520 | 0.4909 | 50.9500 | 725 | 0.0539 | 5.5950 |
| 525 | 0.5412 | 56.1700 | 730 | 0.0467 | 4.8470 |
| 530 | 0.5838 | 60.6000 | 735 | 0.0407 | 4.2200 |
| 535 | 0.6226 | 64.6200 | 740 | 0.0353 | 3.6630 |
| 540 | 0.6572 | 68.2100 | 745 | 0.0306 | 3.1760 |
| 545 | 0.6902 | 71.6400 | 750 | 0.0268 | 2.7840 |
| 550 | 0.7215 | 74.8900 | 755 | 0.0234 | 2.4300 |
| 555 | 0.7509 | 77.9400 | 760 | 0.0207 | 2.1460 |
| 560 | 0.7801 | 80.9800 | 765 | 0.0180 | 1.8720 |
| 565 | 0.8056 | 83.6200 | 770 | 0.0160 | 1.6570 |
| 570 | 0.8257 | 85.7000 | 775 | 0.0138 | 1.4340 |
| 575 | 0.8395 | 87.1400 | 780 | 0.0131 | 1.3620 |
| 580 | 0.8488 | 88.1000 | | | |

| WL(nm) | Spectrum | Spectrum | WL(nm) | Spectrum | Spectrum |
|--------|----------|----------|--------|----------|----------|
| 380 | 0.0235 | 3.2400 | 585 | 0.5829 | 80.4000 |
| 385 | 0.0144 | 1.9860 | 590 | 0.5691 | 78.5000 |
| 390 | 0.0096 | 1.3300 | 595 | 0.5504 | 75.9200 |
| 395 | 0.0081 | 1.1170 | 600 | 0.5277 | 72.7800 |
| 400 | 0.0080 | 1.0970 | 605 | 0.5037 | 69.4800 |
| 405 | 0.0115 | 1.5900 | 610 | 0.4764 | 65.7100 |
| 410 | 0.0232 | 3.2010 | 615 | 0.4457 | 61.4700 |
| 415 | 0.0502 | 6.9300 | 620 | 0.4150 | 57.2400 |
| 420 | 0.0960 | 13.2400 | 625 | 0.3839 | 52.9600 |
| 425 | 0.1693 | 23.3500 | 630 | 0.3509 | 48.4000 |
| 430 | 0.2692 | 37.1200 | 635 | 0.3203 | 44.1800 |
| 435 | 0.4079 | 56.2700 | 640 | 0.2906 | 40.0800 |
| 440 | 0.5977 | 82.4400 | 645 | 0.2617 | 36.1000 |
| 445 | 0.8543 | 117.8000 | 650 | 0.2349 | 32.3900 |
| 450 | 0.9998 | 137.9000 | 655 | 0.2101 | 28.9800 |
| 455 | 0.7884 | 108.7000 | 660 | 0.1867 | 25.7500 |
| 460 | 0.5076 | 70.0100 | 665 | 0.1649 | 22.7400 |
| 465 | 0.3620 | 49.9300 | 670 | 0.1458 | 20.1200 |
| 470 | 0.2533 | 34.9300 | 675 | 0.1282 | 17.6900 |
| 475 | 0.1763 | 24.3100 | 680 | 0.1122 | 15.4800 |
| 480 | 0.1422 | 19.6100 | 685 | 0.0986 | 13.6000 |
| 485 | 0.1347 | 18.5800 | 690 | 0.0858 | 11.8300 |
| 490 | 0.1453 | 20.0400 | 695 | 0.0750 | 10.3500 |
| 495 | 0.1771 | 24.4300 | 700 | 0.0656 | 9.0420 |
| 500 | 0.2252 | 31.0600 | 705 | 0.0568 | 7.8400 |
| 505 | 0.2825 | 38.9600 | 710 | 0.0493 | 6.8040 |
| 510 | 0.3407 | 46.9900 | 715 | 0.0432 | 5.9550 |
| 515 | 0.3951 | 54.4900 | 720 | 0.0376 | 5.1800 |
| 520 | 0.4402 | 60.7200 | 725 | 0.0327 | 4.5080 |
| 525 | 0.4768 | 65.7600 | 730 | 0.0282 | 3.8900 |
| 530 | 0.5044 | 69.5700 | 735 | 0.0249 | 3.4310 |
| 535 | 0.5269 | 72.6700 | 740 | 0.0215 | 2.9680 |
| 540 | 0.5452 | 75.1900 | 745 | 0.0189 | 2.6030 |
| 545 | 0.5590 | 77.1100 | 750 | 0.0165 | 2.2690 |
| 550 | 0.5714 | 78.8200 | 755 | 0.0145 | 2.0050 |
| 555 | 0.5828 | 80.3800 | 760 | 0.0127 | 1.7460 |
| 560 | 0.5906 | 81.4700 | 765 | 0.0111 | 1.5320 |
| 565 | 0.5949 | 82.0500 | 770 | 0.0097 | 1.3450 |
| 570 | 0.5985 | 82.5600 | 775 | 0.0086 | 1.1930 |
| 575 | 0.5964 | 82.2600 | 780 | 0.0080 | 1.1040 |
| 580 | 0.5919 | 81.6500 | | | |


Driver Case Temperature/ LED Drive Current/TMP_{LED} Test Data

| EUT | Driver Max Tc (°C) | Driver In-Situ Temperature (°C) | LED In-Situ Current (mA) | LED In-Situ Temperature (°C)(1#) | LED In-Situ Temperature (°C)(2#) | LED In-Situ Temperature (°C)(3#) |
|-------|--------------------|---------------------------------|--------------------------|----------------------------------|----------------------------------|----------------------------------|
| 83364 | N/A | N/A | 102.2 | 87.4 | 86.7 | 86.2 |

LED Lighting Source Temperature Measurement Point in LM-80 Report

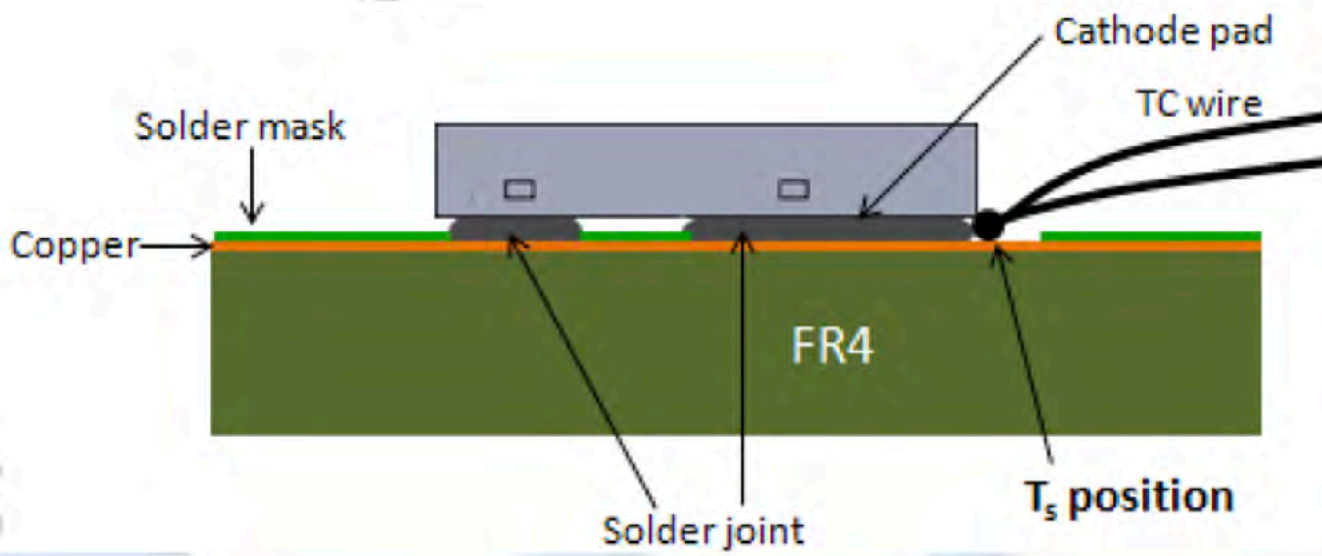

LED Lighting Source In Situ Temperature Measurement

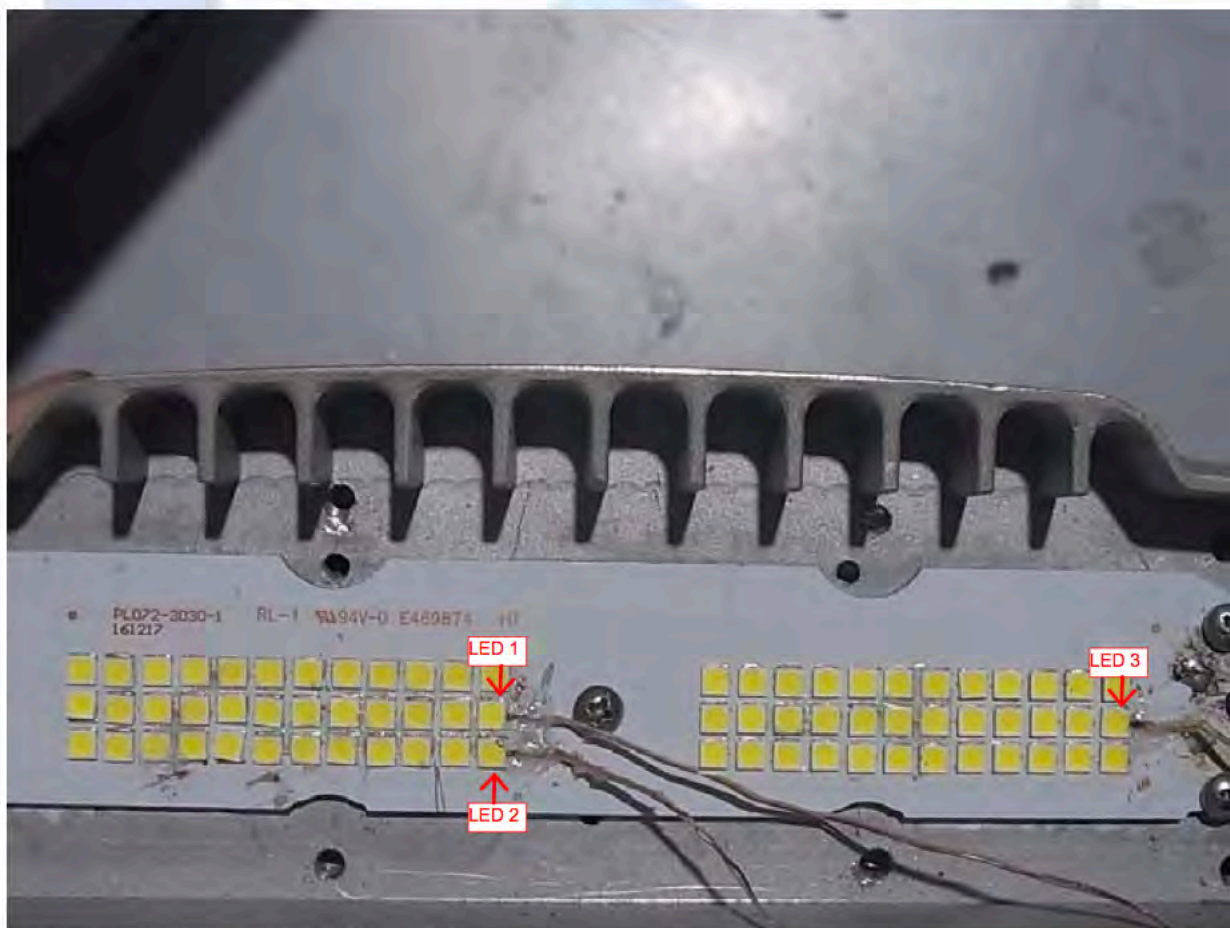


TOP: LED 1



Lumen Maintenance and Lighting Source Life Test Data

L70



TM-21 Inputs

| <p>Instructions</p> <p>Yellow fields are completed by the user. Fields not used should be left blank. Cyan fields are calculated based on user entries.</p> <p>First, enter a description of the LED light source tested. Then complete the fields labeled "LM-80 Testing Details". Test duration must be at least 6,000 hours. If only one case temperature data set is to be used (no interpolation), complete only "Tested case temperature 1". For only two case temperature data sets, complete 1 and 2.</p> <p>Next, further to the right, in the corresponding box(es) for each tested case temperature, enter the test data along with the time (in hours) at which each measurement was taken. Data entered must be normalized then averaged measured data (per TM-21 sections 5.2.1 and 5.2.2). If case temperatures have different test durations, enter data up to the lowest of the test durations for all of the case temperatures.</p> <p>Enter drive current, <i>in-situ</i> temperature data and the percentage of initial lumens to project to in the fields labeled "<i>In-Situ</i> Inputs".</p> <p>Results can be tailored to estimate lumen maintenance at a specific time by entering a value (t) in the yellow field. A complete TM-21 report will appear on the next tab labeled "Report".</p> | <p>Description of LED Light Source Tested (manufacturer, model, catalog number)</p> <p>Lumileds LUXEON 3030 2D</p> | LM-80 Test Inputs | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|---|--|--|--|--|--|---|---|----|------------------------|------|----------------------------|-----|--|----|--|----|--|-----|--|--|--------------|-----------------------|------|--------|------|--------|------|--------|------|--------|------|--------|------|--------|------|--------|------|--------|------|--------|--|--|--------------|-----------------------|------|--------|------|--------|------|--------|------|--------|------|--------|------|--------|------|--------|------|--------|------|--------|--|--|--------------|-----------------------|------|--------|------|--------|------|--------|------|--------|------|--------|------|--------|------|--------|------|--------|------|
| | LM-80 Testing Details | | Test Data for 55°C Case Temperature | | Test Data for 85°C Case Temperature | | Test Data for 105°C Case Temperature | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | <table border="1" style="width: 100%; border-collapse: collapse;"> <tr><td>Total number of units tested per case temperature:</td><td style="text-align: center;">20</td></tr> <tr><td>Number of failures:</td><td style="text-align: center;">0</td></tr> <tr><td>Number of units measured:</td><td style="text-align: center;">20</td></tr> <tr><td>Test duration (hours):</td><td style="text-align: center;">9000</td></tr> <tr><td>Tested drive current (mA):</td><td style="text-align: center;">165</td></tr> <tr><td>Tested case temperature 1 (T_c, °C):</td><td style="text-align: center;">55</td></tr> <tr><td>Tested case temperature 2 (T_c, °C):</td><td style="text-align: center;">85</td></tr> <tr><td>Tested case temperature 3 (T_c, °C):</td><td style="text-align: center;">105</td></tr> </table> | | Total number of units tested per case temperature: | 20 | Number of failures: | 0 | Number of units measured: | 20 | Test duration (hours): | 9000 | Tested drive current (mA): | 165 | Tested case temperature 1 (T _c , °C): | 55 | Tested case temperature 2 (T _c , °C): | 85 | Tested case temperature 3 (T _c , °C): | 105 | <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr><th>Time (hours)</th><th>Lumen Maintenance (%)</th></tr> </thead> <tbody> <tr><td>1000</td><td style="text-align: center;">99.18%</td></tr> <tr><td>2000</td><td style="text-align: center;">98.66%</td></tr> <tr><td>3000</td><td style="text-align: center;">98.49%</td></tr> <tr><td>4000</td><td style="text-align: center;">97.91%</td></tr> <tr><td>5000</td><td style="text-align: center;">97.58%</td></tr> <tr><td>6000</td><td style="text-align: center;">97.18%</td></tr> <tr><td>7000</td><td style="text-align: center;">96.66%</td></tr> <tr><td>8000</td><td style="text-align: center;">96.56%</td></tr> <tr><td>9000</td><td style="text-align: center;">96.30%</td></tr> </tbody> </table> | | Time (hours) | Lumen Maintenance (%) | 1000 | 99.18% | 2000 | 98.66% | 3000 | 98.49% | 4000 | 97.91% | 5000 | 97.58% | 6000 | 97.18% | 7000 | 96.66% | 8000 | 96.56% | 9000 | 96.30% | <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr><th>Time (hours)</th><th>Lumen Maintenance (%)</th></tr> </thead> <tbody> <tr><td>1000</td><td style="text-align: center;">98.98%</td></tr> <tr><td>2000</td><td style="text-align: center;">98.21%</td></tr> <tr><td>3000</td><td style="text-align: center;">97.84%</td></tr> <tr><td>4000</td><td style="text-align: center;">97.15%</td></tr> <tr><td>5000</td><td style="text-align: center;">96.76%</td></tr> <tr><td>6000</td><td style="text-align: center;">96.36%</td></tr> <tr><td>7000</td><td style="text-align: center;">95.94%</td></tr> <tr><td>8000</td><td style="text-align: center;">95.99%</td></tr> <tr><td>9000</td><td style="text-align: center;">95.53%</td></tr> </tbody> </table> | | Time (hours) | Lumen Maintenance (%) | 1000 | 98.98% | 2000 | 98.21% | 3000 | 97.84% | 4000 | 97.15% | 5000 | 96.76% | 6000 | 96.36% | 7000 | 95.94% | 8000 | 95.99% | 9000 | 95.53% | <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr><th>Time (hours)</th><th>Lumen Maintenance (%)</th></tr> </thead> <tbody> <tr><td>1000</td><td style="text-align: center;">98.84%</td></tr> <tr><td>2000</td><td style="text-align: center;">98.00%</td></tr> <tr><td>3000</td><td style="text-align: center;">97.50%</td></tr> <tr><td>4000</td><td style="text-align: center;">96.62%</td></tr> <tr><td>5000</td><td style="text-align: center;">96.24%</td></tr> <tr><td>6000</td><td style="text-align: center;">95.70%</td></tr> <tr><td>7000</td><td style="text-align: center;">95.33%</td></tr> <tr><td>8000</td><td style="text-align: center;">95.45%</td></tr> <tr><td>9000</td><td style="text-align: center;">94.81%</td></tr> </tbody> </table> | | Time (hours) | Lumen Maintenance (%) | 1000 | 98.84% | 2000 | 98.00% | 3000 | 97.50% | 4000 | 96.62% | 5000 | 96.24% | 6000 | 95.70% | 7000 | 95.33% | 8000 | 95.45% | 9000 |
| Total number of units tested per case temperature: | 20 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Number of failures: | 0 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Number of units measured: | 20 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Test duration (hours): | 9000 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Tested drive current (mA): | 165 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Tested case temperature 1 (T _c , °C): | 55 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Tested case temperature 2 (T _c , °C): | 85 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Tested case temperature 3 (T _c , °C): | 105 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Time (hours) | Lumen Maintenance (%) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1000 | 99.18% | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2000 | 98.66% | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 3000 | 98.49% | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 4000 | 97.91% | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 5000 | 97.58% | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 6000 | 97.18% | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 7000 | 96.66% | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 8000 | 96.56% | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 9000 | 96.30% | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Time (hours) | Lumen Maintenance (%) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1000 | 98.98% | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2000 | 98.21% | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 3000 | 97.84% | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 4000 | 97.15% | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 5000 | 96.76% | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 6000 | 96.36% | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 7000 | 95.94% | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 8000 | 95.99% | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 9000 | 95.53% | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Time (hours) | Lumen Maintenance (%) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1000 | 98.84% | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2000 | 98.00% | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 3000 | 97.50% | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 4000 | 96.62% | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 5000 | 96.24% | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 6000 | 95.70% | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 7000 | 95.33% | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 8000 | 95.45% | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 9000 | 94.81% | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| In-Situ Inputs | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| <table border="1" style="width: 100%; border-collapse: collapse;"> <tr><td>Drive current for each LED package/array/module (mA):</td><td style="text-align: center;">102.2</td></tr> <tr><td><i>In-situ</i> case temperature (T_c, °C):</td><td style="text-align: center;">87.4</td></tr> <tr><td>Percentage of initial lumens to project to (e.g. for L₇₀, enter 70):</td><td style="text-align: center;">70</td></tr> </table> | | Drive current for each LED package/array/module (mA): | 102.2 | <i>In-situ</i> case temperature (T _c , °C): | 87.4 | Percentage of initial lumens to project to (e.g. for L ₇₀ , enter 70): | 70 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Drive current for each LED package/array/module (mA): | 102.2 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| <i>In-situ</i> case temperature (T _c , °C): | 87.4 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Percentage of initial lumens to project to (e.g. for L ₇₀ , enter 70): | 70 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Results | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| <table border="1" style="width: 100%; border-collapse: collapse;"> <tr><td>Time (t) at which to estimate lumen maintenance (hours):</td><td style="text-align: center;">50,000</td></tr> <tr><td>Lumen maintenance at time (t) (%):</td><td style="text-align: center;">83.40%</td></tr> <tr><td>Reported L70 (hours):</td><td style="text-align: center;">>54000</td></tr> </table> | | Time (t) at which to estimate lumen maintenance (hours): | 50,000 | Lumen maintenance at time (t) (%): | 83.40% | Reported L70 (hours): | >54000 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Time (t) at which to estimate lumen maintenance (hours): | 50,000 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Lumen maintenance at time (t) (%): | 83.40% | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Reported L70 (hours): | >54000 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

EUT Photos

