



Item#: **83693**
LED SPEC-SELECT™ MINI WALL PACK
OUTDOOR NON-CUTOFF AND SEMI-CUTOFF WALL-
MOUNTED AREA LUMINAIRES

FEATURES

- Adjustable wattage and color temperature.
- Integrated photocell with On/Off switch.
- Sealed housing for outdoor applications
- Polycarbonate optical lens

APPLICATION

Ideal for security, pathway and perimeter lighting, building entry ways and walkways.

ELECTRICAL

Wattage	15W / 20W / 25W
Voltage	100-277V
Current	0.21A
Power Factor	0.9
Total Harmonic Distortion (THD)	20

LIGHTING PERFORMANCE

Lumens	1800 / 2400 / 3000
Lumens Per Watt (LPW)	120
Color Temperature (CCT)	3000K / 4000K / 5000K
Color Rendering (CRI)	80
R9 (Red Value)	--
Beam Angle	--
Light Distribution	--
BUG Rating (Backlight, Uplight, and Glare)	--
Dimmable Lighting Control	<i>Dimmable</i> 0-10V, Range 10% - 100%

ENVIRONMENT

Operating Temperature	-40° ~ 122°F
Suitable Location	WET
Ingress Protection Rating	IP66

LIFESPAN

Average Life (Hours)	50,000
Warranty (Years)	5

COMPONENTS

LED Light Source	--
Driver	--

CONSTRUCTION

Housing	Die Cast Aluminum / PC
Lens	Clear
Base / Power Supply	Hard Wired
Finish	Bronze

QUALIFICATIONS

Model Number	MWP-SS25S-W-8-PH
Pending	


Published lumens on LED products are approximate and may vary slightly. - Specifications are subject to change without notice.

Item#: **83693**
LED SPEC-SELECT™ MINI WALL PACK



ITEM INFORMATION

DIMENSIONS (Inches)	
Length	8.8"
Width	5.9"
Height	2.6"
Net Weight (Lbs)	--

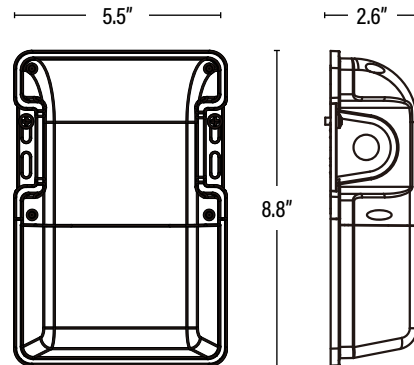

PACKAGING		UPC	DIMENSIONS (LxWxH)	GROSS WEIGHT (Lbs)
Master Carton	10	10811768027515	15.4" x 13.2" x 9.7"	15.7
Individual Box	1	811768027518	6.3" x 3" x 9.1"	1.6
Country of Origin	China			
HS Tariff	9405.11.8020			

ORDERING *Qualification Model # MWP-SS25S-W-8-PH*

ITEM#	DESCRIPTION	CASE
83693	LED SPEC-SELECT™ MINI WALL PACK/15-20-25W/30-40-50K/DIMM/120-277V/BRZ/PC	10

REPLACEMENT PARTS		
--	REPLACEMENT DRIVER FOR MINI WALL PACK	1

ADDITIONAL INFORMATION:

Note: To prevent water damage which may shorten the life of an exterior mounted fixture; the fixture should be properly weather sealed according to the installation instructions or between the fixture base and mounting surface. Damage due to improper installation may void the warranty.