



# 83710

## UNIVERSAL WALL PACK

ARCHITECTURAL FLOOD AND SPOT  
LUMINAIRES


### FEATURES

- Energy efficient; consumes at least 50% less than traditional lighting.
- Solid coating to resist acid, alkali and salt erosion.
- Excellent heat dispersion
- Low working temperature.

### APPLICATION:


Wall washing, landscaping lighting, outdoor advertising and square nocturnes.

### PRODUCT DETAILS

ELECTRICAL	
Wattage	20W
Voltage	100-277V
Current	0.5A
Power Factor	0.9
Total Harmonic Distortion (THD)	N/A
LIGHTING PERFORMANCE	
Lumens	1850
Lumens Per Watt (Lm/W)	82
Color Temperature (CCT)	5000K
Color Rendering (CRI)	70
Beam Angle	140°
Light Distribution	N/A
Dimmable Lighting Control	
ENVIRONMENT	
Operating Temperature	-20°C ~ 40°C
Suitable Location	<b>WET</b>
Ingress Protection Rating	IP54
CERTIFICATIONS	



LIFESPAN	
Average Life (Hours)	50,000
Warranty (Years)	5
COMPONENTS	
LED Light Source	CREE
Driver	Towin FS24W-48C0500
CONSTRUCTION	
Housing	Aluminum
Base / Power Supply	Hard Wired
Finish	Bronze
PACKAGING	
Master Carton	1pc / 10811768025955
Individual Box	811768025958
Country of Origin	China
HS Tariff	9405.40.6000
DIMENSIONS	
Dimensions (Inches)	6.6"(L) x 4.3"(W) x 7.8"(D)

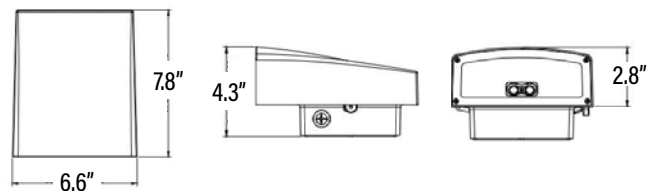

### ORDERING

ITEM#	DESCRIPTION	CASE
83710	LED 20W UNIVERSAL WALL PACK/50K/120-277V - SUPERIOR LIFE®	1
ACCESSORIES		
83712	U SHAPED MOUNTING BRACKET FOR UNIVERSAL WALL PACK - SUPERIOR LIFE®	1
83713	SWIVEL FOR 1/2" MOUNTING FOR UNIVERSAL WALL PACK - SUPERIOR LIFE®	1
83714	PHOTO CELL FOR UNIVERSAL WALL PACK - SUPERIOR LIFE®	1

Published lumens on LED products are approximate and may vary slightly.

[www.PQLighting.com](http://www.PQLighting.com)

© P.Q.L., INC. • 2285 WARD AVENUE • SIMI VALLEY, CA 93065 • 800.323.8107 • FAX: 877.619.7053

GO GREEN

0617