



Item#: **83754**
LED CEILING LIGHT
INDOOR FIXTURE

FEATURES

- Diffusing lens provides glare free illumination and even light distribution.
- Designed with the lasted solid state lighting and electronic driver for optimal performance and energy efficiency.
- Die formed cold rolled steel mounting plate; painted with a treatment for anti-corrosion.

APPLICATION

Homes, schools, retail, office and hospitality.

ELECTRICAL

Wattage	16W
Voltage	120V
Current	0.15A
Power Factor	0.8
Total Harmonic Distortion (THD)	N/A

LIGHTING PERFORMANCE

Lumens	1000
Lumens Per Watt (LPW)	63
Color Temperature (CCT)	4000K
Color Rendering (CRI)	80
R9 (Red Value)	23
R13 (Skin Tones)	87
Beam Angle	120°
Light Distribution	Type VS
BUG Rating (Backlight, Uplight, and Glare)	B1 - U3 - G1
Dimmable Lighting Control	<i>Dimmable</i> 120V Dimming

ENVIRONMENT

Operating Temperature	-4° ~ 104°F
Suitable Location	DAMP
Ingress Protection Rating	IP20

LIFESPAN

Average Life (Hours)	35,000
Warranty (Years)	3

COMPONENTS

LED Light Source	Samsung SPMWHx228F
Driver	837546 - 16W320MAC

CONSTRUCTION

Housing	C.R.S / PC
Base / Power Supply	Hard Wired
Finish	White

QUALIFICATIONS



Visit www.energystar.gov to confirm qualification. • Published lumens on LED products are approximate and may vary slightly. • Specifications are subject to change without notice.


Item#: **83754**
LED CEILING LIGHT



ITEM INFORMATION

DIMENSIONS (Inches)

Width/Diameter (MOD)	11"
Height	3.6"
Net Weight (Lbs)	--

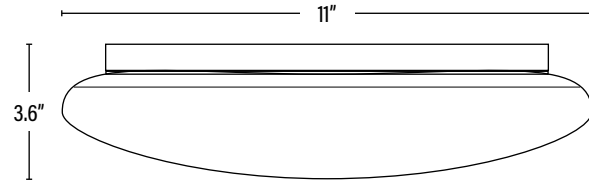

SUPPORTING DOCUMENTS (Grey = not available at this time.)

Product Sheet	VIEW
Install Instructions	VIEW
Photometric	VIEW
IES Download from Web Item	VIEW
LM79	VIEW
LM80	VIEW

PACKAGING

		UPC	DIMENSIONS (LxWxH)	GROSS WEIGHT (Lbs)
Master Carton	10	10811768025115	24.8" x 21.7" x 13"	14.6
Individual Box	1	811768025118	12" x 4.1" x 12.1"	1.5
Country of Origin	China			
HS Tariff	9405.10.6020			

ORDERING

ITEM#	DESCRIPTION	CASE
83754	LED 11IN MUSHROOM CEILING LIGHT/16W/40K/DIMM/120V/WHT - ENERGY STAR®	10

REPLACEMENT PARTS

837548	11" ROUND REPLACEMENT LENS COVER	1
--------	----------------------------------	---