



Item#: **83756**
LED CEILING LIGHT
INDOOR FIXTURE

FEATURES

- Diffusing lens provides glare free illumination and even light distribution.
- Designed with the lasted solid state lighting and electronic driver for optimal performance and energy efficiency.
- Die formed cold rolled steel mounting plate; painted with a treatment for anti-corrosion.

APPLICATION

Homes, schools, retail, office and hospitality.

ELECTRICAL

Wattage	25W
Voltage	120V
Current	0.23A
Power Factor	0.8
Total Harmonic Distortion (THD)	N/A

LIGHTING PERFORMANCE

Lumens	1700
Lumens Per Watt (LPW)	68
Color Temperature (CCT)	4000K
Color Rendering (CRI)	80
R9 (Red Value)	33
R13 (Skin Tones)	--
Beam Angle	120°
Light Distribution	Type VS
Dimmable Lighting Control	<i>Dimmable</i> 120V Dimming

ENVIRONMENT

Operating Temperature	-4° ~ 104°F
Suitable Location	DAMP
Ingress Protection Rating	IP20

LIFESPAN

Average Life (Hours)	35,000
Warranty (Years)	3

COMPONENTS

LED Light Source	Samsung SPMWHx228F
Driver	837566 - 25W320MAC

CONSTRUCTION

Housing	C.R.S / PC
Base / Power Supply	Hard Wired
Finish	White

QUALIFICATIONS



Published lumens on LED products are approximate and may vary slightly. • Specifications are subject to change without notice.


Item#: **83756**
LED CEILING LIGHT



ITEM INFORMATION

DIMENSIONS (Inches)

Width/Diameter (MOD)	13.8"
Height	4.4"
Net Weight (Lbs)	--

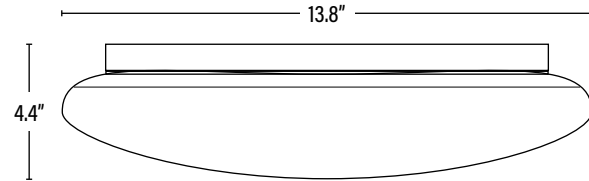

SUPPORTING DOCUMENTS (Grey = not available at this time.)

Product Sheet	VIEW
Install Instructions	VIEW
IES Download from Web Item	VIEW
LM79	VIEW
LM80	VIEW

PACKAGING

		UPC	DIMENSIONS (LxWxH)	GROSS WEIGHT (Lbs)
Master Carton	5	10811768026266	26" x 15.7" x 16.1"	12.8
Individual Box	1	811768026269	15.2" x 5" x 15.3"	2.7
Country of Origin	China			
HS Tariff	9405.10.6020			

ORDERING

ITEM#	DESCRIPTION	CASE
83756	LED 14IN MUSHROOM CEILING LIGHT/25W/40K/DIMM/120V/WHT	5

REPLACEMENT PARTS

837568	14" ROUND REPLACEMENT LENS COVER	1
--------	----------------------------------	---