



Item#: **83964**
PHOTO CELL FOR OUTDOOR FIXTURES
 480V FIXTURE ACCESSORY

FEATURES

- Surge protection built-in.
- Provides control based on daylight contribution.
- Preset delay for 5 - 20 seconds to avoid activation by temporary light.
- Twist lock installation.

APPLICATION

Photo cell is designed for use in areas such as street, doorway and pathway lighting.

ELECTRICAL

Voltage	208-480V	
Frequency	50/60 Hz	
Power Supply	Tungsten	1000W
	Ballast	1800VA
Power Consumption	LED	0.5W
	Ballast	0.9W

PERFORMANCE

Typical On/Off Level	On	16 Lux
	Off	24 Lux

ENVIRONMENT

Ambient Temperature	-40° ~ 158°F
Suitable Location	WET
Ingress Protection Rating	IP67
Humidity	Max. 99% RH

CONSTRUCTION

Housing	Plastic
Mounting	Plug In / Twist Lock
Finish	Blue

QUALIFICATIONS



PERFORMANCE DATA

PACKAGING


Item#: **83964**
PHOTO CELL FOR OUTDOOR FIXTURES



DIMENSIONS (Inches)

Width/Diameter	3.3"
Height	2.6"
Weight (Lbs)	0.24

Line drawings may not be to scale and are for general reference only.

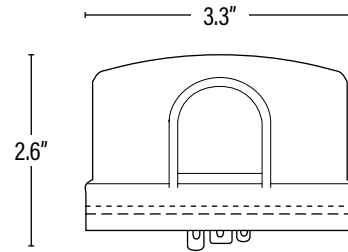

PACKAGING

		UPC	DIMENSIONS (LxWxH)	GROSS WEIGHT (Lbs)
Master Carton	50	10899645001001	--	--
Individual Box	1	899645001004	--	--
Country of Origin	China			
HS Tariff	9405.99.4090			

ORDERING


ITEM#	DESCRIPTION	CASE
83964	PHOTO CONTROL FOR LED STEALTH™ V2 FIXTURE/480V	50

INSTALLATION INSTRUCTIONS:

1. Disconnect power and wire the receptacle according to Figure 1.
2. Push the photo controller on and twist it clockwise to lock it into the receptacle.
3. Install the photo controller with the photocell facing North as indicated on top of the Photo controller; adjusting the receptacle if necessary.

Note: Do not install the switch with the photocell facing artificial or reflected light. This will cause the unit to cycle on and off at night.

FIG. 1

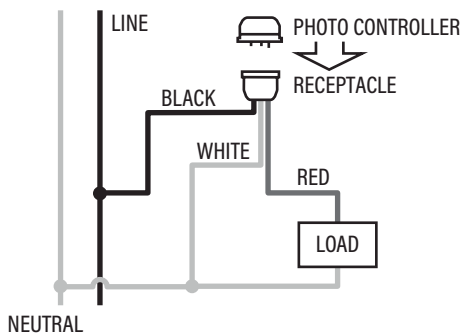

PERFORMANCE DATA

PACKAGING