



Item#: **84172**

LED WALL PACK

OUTDOOR NON-CUTOFF AND SEMI-CUTOFF
WALL-MOUNTED AREA LUMINARIES

FEATURES

- Replaces 100-250W traditional HID wall packs.
- Durable, die casting housing.
- Powder coat finish, corrosion and weather resistant.
- Sealed to keep out moisture and environmental contaminants.

APPLICATION

Ideal for security, walkways and perimeter lighting.

PERFORMANCE DATA

ELECTRICAL

Wattage	60W
Voltage	120-277V
Power Factor	0.9
Total Harmonic Distortion (THD)	15

LIGHTING PERFORMANCE

Lumens	7200
Lumens Per Watt (Lm/W)	120
Color Temperature (CCT)	5000K
Color Rendering (CRI)	80
R9 (Red Value)	13
R13 (Skin Tones)	--
Beam Angle	110° x 105°
Light Distribution	Type I, Very Short
BUG Rating (Backlight, Uplight, and Glare)	B2 - U4 - G3
Dimmable Lighting Control	<i>Dimmable</i> 1-10V, Range 10% - 100%

ENVIRONMENT

Operating Temperature	-40° ~ 104°F
Suitable Location	WET
Ingress Protection Rating	IP65

LIFESPAN

Average Life (Hours)	50,000
Warranty (Years)	5

COMPONENTS

LED Light Source	LUXEON 3030 2D
Driver	WP-HLA-060U

CONSTRUCTION

Housing	Die Cast Aluminum
Lens	Tempered Glass
Base / Power Supply	Hard Wired
Finish	Bronze

QUALIFICATIONS



Visit www.designlights.org/search to confirm qualification. • Published lumens on LED products are approximate and may vary slightly. • Specifications are subject to change without notice.


Item#: **84172**
LED WALL PACK



ITEM INFORMATION

DIMENSIONS (Inches)

Length	14.2"
Width	7.7"
Height	9.1"
Net Weight (Lbs)	--

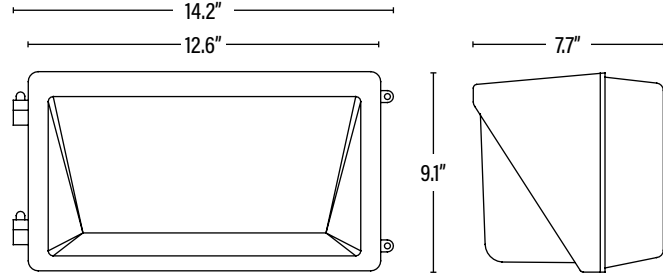

SUPPORTING DOCUMENTS (Grey = not available at this time.)

Product Sheet	VIEW
Install Instructions	VIEW
IES Download from Web Item	VIEW
LM79	VIEW
LM80	VIEW

PACKAGING

		UPC	DIMENSIONS (LxWxH)	GROSS WEIGHT (Lbs)
Master Carton	1	854432004668	15.4" x 10.6" x 9.4"	9.7
Country of Origin	China			
HS Tariff	9405.10.6020			

ORDERING

ITEM#	DESCRIPTION	CASE
84172	LED WALL PACK 60W/50K/120-277V/DIMMABLE/BRONZE/V2 - SUPERIOR LIFE® DLC®	1

ACCESSORIES

83335	SHIELD ONLY FOR LED WALL PACK - SUPERIOR LIFE®	15
83336*	BUTTON STYLE PHOTO CELL FOR LED WALL PACK/120-277V - SUPERIOR LIFE®	70

REPLACEMENT PARTS

841708	REPLACEMENT LENS FOR V2 LED WALL PACK 84170/84172/84174	1
WP-HLA-060U	REPLACEMENT 60W DIMMABLE LED DRIVER	1

ADDITIONAL INFORMATION:

*83336: Photo Cell is top mount only and requires driver removal to install.

Note: To prevent water damage which may shorten the life of an exterior mounted fixture; the fixture should be properly weather sealed according to the installation instructions or between the fixture base and mounting surface. Damage due to improper installation may void the warranty.