



Item#: **84188**

**LED STEALTH™ FIXTURE**

**OUTDOOR POLE/ARM-MOUNTED AREA AND ROADWAY LUMINAIRES - ARCHITECTURAL FLOOD AND SPOT LUMINAIRES**

**FEATURES**

- Engineered for high lumen per watt light output.
- Slim and modern appearance.
- Integrated heat sink, provides excellent thermal dissipation.
- Surge protection device.
- Easy 1 person installation with our quick mount bracket and hinged door frame; installer can be hands free when establishing electrical connections.

**APPLICATION**

Parking lot, street and building perimeter lighting. Can be used as flood or area light.

**ELECTRICAL**

Wattage	61W
Voltage	120-277V
Power Factor	0.9
Total Harmonic Distortion (THD)	15.7

**LIGHTING PERFORMANCE**

Lumens	8696
Lumens Per Watt (LPW)	144
Color Temperature (CCT)	4000K
Color Rendering (CRI)	84
R9 (Red Value)	13
Beam Angle	--
Light Distribution	Type V
BUG Rating (Backlight, Uplight, and Glare)	B3 - U3 - G2
Dimmable Lighting Control	<i>Dimmable</i> 0-10V, Range 10% - 100%

**ENVIRONMENT**

Operating Temperature	-40° ~ 131°F
Suitable Location	<b>WET</b>
Ingress Protection Rating	IP66

**LIFESPAN**

Average Life (Hours)	50,000
Warranty (Years)	<b>5</b>

**COMPONENTS**

LED Light Source	Luxeon 3030
Driver	SS-75VA-56B

**CONSTRUCTION**

Housing	Aluminum
Lens	PC
Base / Power Supply	Hard Wire / Surge Protector
Finish	Bronze
Effective Projected Area (EPA)	0.23 ft²
Wind Shear Rating	116.8 mph

**QUALIFICATIONS**

Model Number	STL3P-60W-4000K-C-MB-HC-P
--------------	---------------------------



Visit [www.designlights.org/search](http://www.designlights.org/search) to confirm qualification. • Published lumens on LED products are approximate and may vary slightly. • Specifications are subject to change without notice.


Item#: **84188**  
**LED STEALTH™ FIXTURE**



ITEM INFORMATION

<b>DIMENSIONS</b> (Inches)	
Length	16.8"
Width	12"
Height	3.5"
Net Weight (Lbs)	--

<b>SUPPORTING DOCUMENTS</b> (Grey = not available at this time.)	
Product Sheet	VIEW
Install Instructions	VIEW
IES Download from Web Item	VIEW
LM79	VIEW
LM80	VIEW

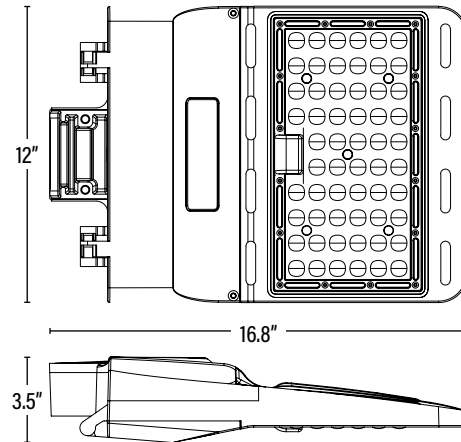

<b>PACKAGING</b>		<b>UPC</b>	<b>DIMENSIONS</b> (LxWxH)	<b>GROSS WEIGHT</b> (Lbs)
Master Carton	1	854432004910	18.5" x 13.8" x 6.5"	10
Country of Origin	China			
HS Tariff	9405.10.6020			

**ORDERING\*** Qualification Model # *STL3P-60W-4000K-C-MB-HC-P*

<b>ITEM#</b>	<b>DESCRIPTION</b>	<b>CASE</b>
84188	LED HL STEALTH™/60W/40K/TYPE V/DIMM/120-277V/BRZ - <b>DLC®</b>	1

**ACCESSORIES**

83960	QUICK-MOUNT TRUNNION MOUNT BRACKET FOR STEALTH™/BRZ	10
83956	QUICK-MOUNT ADAPTER TO MOUNT ON ROUND OR FLAT POLE FOR STEALTH™/BRZ	10
83955	QUICK-MOUNT SLIP FITTER FOR STEALTH™/BRZ	10
83646	ADAPTER TO MOUNT A SLIP FITTER ON A FLAT POLE OR WALL/BRZ	1
84004	GLARE SHIELD FOR LED STEALTH™ 80W TO 185W	10
84015	DOOR FRAME ONLY FOR LED STEALTH™ WITH SENSOR CUT-OUT/80W-185W/BRZ	36
54892	360° OUTDOOR FIXTURE BI-LEVEL & DAYLIGHT HARVEST PIR SENSOR 30' DIA, UP TO 40' HEIGHT 800W/1200W • 120/277V	100
83963	PHOTO CONTROL FOR LED STEALTH™ FIXTURE/120-277V	50

**REPLACEMENT PARTS**

JL208	SHORTING CAP FOR LED STEALTH™ FIXTURE	1
SS-75VA-56B	LED REPLACEMENT DRIVER	1

**ADDITIONAL INFORMATION:**

- The mounting bracket is not included with the fixture, it is ordered as a separate item number. For DLC® qualification one of the Quick-Mount brackets must be purchased.
- Product requires top-mounted shorting cap or optional twist-lock photocell installed to operate.