



Item#: **90004**  
**LED LOW PROFILE CANOPY**  
**FUEL PUMP CANOPY LUMINAIRES**

**FEATURES**

- Thin low-profile design.
- Easy surface mounting

**APPLICATION**

Ideal for retrofitting inefficient outdoor fixtures.

**ELECTRICAL**

Wattage	75W
Voltage	100-277V
Current	0.75A
Power Factor	0.9
Total Harmonic Distortion (THD)	<15%

**LIGHTING PERFORMANCE**

Lumens	9000
Lumens Per Watt (Lm/W)	120
Color Temperature (CCT)	5000K
Color Rendering (CRI)	80
R9 (Red Value)	--
R13 (Skin Tones)	--
Beam Angle	110°
Light Distribution	--
Dimmable Lighting Control	<i>Dimmable</i> 0-10V, Range 10% - 100%

**ENVIRONMENT**

Operating Temperature	-30°C ~ 50°C
Suitable Location	<b>WET</b>
Ingress Protection Rating	IP65

**LIFESPAN**

Average Life (Hours)	50,000
Warranty (Years)	<b>5</b>

**COMPONENTS**

LED Light Source	--
Driver	--

**CONSTRUCTION**

Housing	Aluminum
Base / Power Supply	Hard Wire
Finish	White

**CERTIFICATIONS**



*Published lumens on LED products are approximate and may vary slightly.*

PERFORMANCE DATA

PACKAGING

Item#: **90004**  
**LED LOW PROFILE CANOPY**




**DIMENSIONS** (Inches)

Length	15"
Width/Diameter	15"
Height	2.7"
Weight (Lbs)	10

Line drawings may not be to scale and are for general reference only.

**SUPPORTING DOCUMENTS** (Grey = not available at this time.)

Product Sheet	VIEW
Install Instructions	VIEW
IES Download from Web Item	VIEW
LM79	VIEW
LM80	VIEW

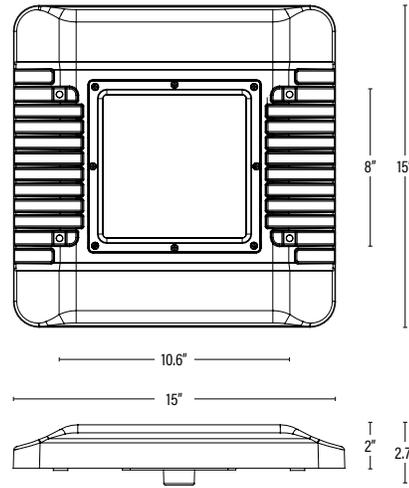

**PACKAGING**

		UPC	DIMENSIONS (LxWxH)	GROSS WEIGHT (Lbs)
Master Carton	1	811768024982	17"x16"x4.25"	12.5
Country of Origin	China			
HS Tariff	9405.40.8200			

**ORDERING**

ITEM#	DESCRIPTION	CASE
90004	LED LOW PROFILE CANOPY 75W/50K/100-277V/DIMMABLE - SUPERIOR LIFE®	1

PERFORMANCE DATA

PACKAGING