



Item#: **90009**
LED LOW PROFILE CANOPY
FUEL PUMP CANOPY LUMINAIRES

FEATURES

- Thin low-profile design.
- Easy surface mounting

APPLICATION

Ideal for retrofitting inefficient outdoor fixtures.

ELECTRICAL

Wattage	130W
Voltage	100-277V
Current	1.3A
Power Factor	0.9
Total Harmonic Distortion (THD)	15

LIGHTING PERFORMANCE

Lumens	15600
Lumens Per Watt (Lm/W)	120
Color Temperature (CCT)	3000K
Color Rendering (CRI)	80
R9 (Red Value)	--
R13 (Skin Tones)	--
Beam Angle	110°
Light Distribution	--
Dimmable Lighting Control	<i>Dimmable</i> 0-10V, Range 10% - 100%

ENVIRONMENT

Operating Temperature	-22° ~ 122°F
Suitable Location	WET
Ingress Protection Rating	IP65

LIFESPAN

Average Life (Hours)	50,000
Warranty (Years)	5

COMPONENTS

LED Light Source	--
Driver	--

CONSTRUCTION

Housing	Aluminum
Base / Power Supply	Hard Wire
Finish	White

CERTIFICATIONS



Published lumens on LED products are approximate and may vary slightly.

PERFORMANCE DATA

PACKAGING

Item#: **90009**
LED LOW PROFILE CANOPY




DIMENSIONS (Inches)

Length	15"
Width/Diameter	15"
Height	2.7"
Weight (Lbs)	11

Line drawings may not be to scale and are for general reference only.

SUPPORTING DOCUMENTS (Grey = not available at this time.)

Product Sheet	VIEW
Install Instructions	VIEW
IES Download from Web Item	VIEW
LM79	VIEW
LM80	VIEW

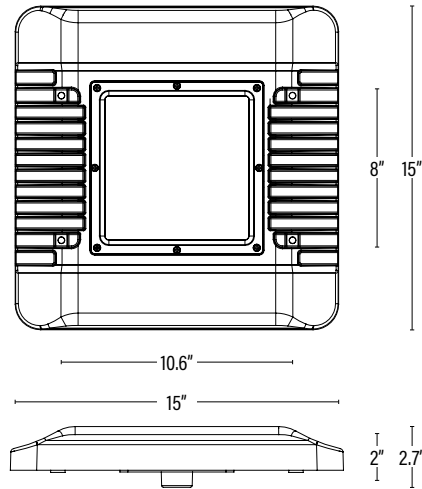

PACKAGING

		UPC	DIMENSIONS (LxWxH)	GROSS WEIGHT (Lbs)
Master Carton	1	--	17"x16"x4.25"	13
Country of Origin	China			
HS Tariff	9405.40.8200			

ORDERING

ITEM#	DESCRIPTION	CASE
90009	LED LOW PROFILE CANOPY 130W/30K/100-277V DIMMABLE - SUPERIOR LIFE®	1

PERFORMANCE DATA

PACKAGING