



Item#: **90382**

LED HALO HIGH BAY

HIGH-BAY LUMINAIRES FOR COMMERCIAL AND INDUSTRIAL BUILDINGS

FEATURES

- Die cast aluminum for better heat dissipation.
- Dust proof and anti-corrosive.
- Elegant design.
- High efficiency constant current voltage driver.

APPLICATION

Ideal for retrofitting inefficient fixtures in malls, hospitals, airports, offices, lobbies and other residential and commercial applications.

ELECTRICAL

Wattage	307W
Voltage	100-277V
Power Factor	0.9
Total Harmonic Distortion (THD)	13.9

LIGHTING PERFORMANCE

Lumens	40239
Lumens Per Watt (Lm/W)	131
Color Temperature (CCT)	2995K
Color Rendering (CRI)	82
R9 (Red Value)	--
R13 (Skin Tones)	--
Beam Angle	120°
Light Distribution	--
Dimmable Lighting Control	<i>Dimmable</i> 0-10V, Range 10% - 100%

ENVIRONMENT

Operating Temperature	-30° ~ 50°C
Suitable Location	WET
Ingress Protection Rating	IP65

LIFESPAN

Average Life (Hours)	50,000
Warranty (Years)	5

COMPONENTS

LED Light Source	--
Driver	Meanwell

CONSTRUCTIONS

Housing	Aluminum
Lens	Tempered Glass
Base / Power Supply	Hard Wired
Finish	Black

CERTIFICATIONS



Published lumens on LED products are approximate and may vary slightly.

PERFORMANCE DATA

PACKAGING


Item#: **90382**
LED HALO HIGH BAY



DIMENSIONS (Inches)

Length	12.6"
Width/Diameter	12.6"
Height	6.3"
Weight (Lbs)	15

Line drawings may not be to scale and are for general reference only.

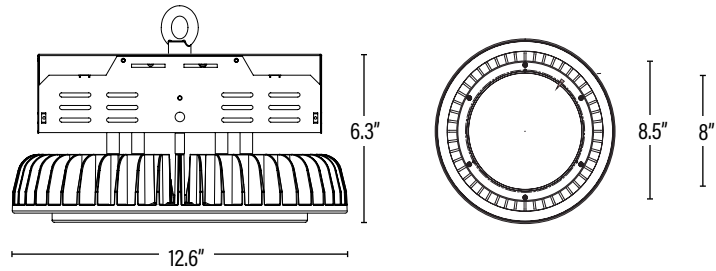

PACKAGING

		UPC	DIMENSIONS (LxWxH)	GROSS WEIGHT (Lbs)
Master Carton	1	--	15.4" x 15.4" x 8.7"	172
Country of Origin	China			
HS Tariff	--			

ORDERING

ITEM#	DESCRIPTION	CASE
90382	LED 307W HALO HIGH BAY/30K/100-277V/DIMMABLE - SUPERIOR LIFE®	1

SUPPORTING DOCUMENTS LINKS *(Greyed out means it's not available at this time.)*

Product Sheet	Install Instructions	IES Download from Web Item	LM79	LM80
---------------	----------------------	-------------------------------	------	------

ADDITIONAL INFORMATION:

- Safety rope length approximately 5' 9"
- Power and dimming cord length approximately 11.8" - 15.7"

PERFORMANCE DATA

PACKAGING