LED HIGH BAY INSTALL INSTRUCTIONS





The units should not be used in areas with limited ventilation or high-ambient temperatures.

Ensure power is off before starting installation, wiring or attempting any maintenance, this work should be performed by a person familiar with the construction and operation of the product and hazards involved to ensure personal safety.

All work should be performed by a qualified electrician.

The mounting wall should be of sufficient strength; its endurance force must be greater than the fixture's weight.

Fixture should not be recessed. Fixture must be positioned with the lamp in a horizontal position.



WARNING DISCONNECT POWER BEFORE INSTALLING OR SERVICING.

1. Secure the unit to the mounting surface, install the mounting ring thats on the luminarie onto the hook that had been secured on the ceiling or use the steel wire to install the luminaire on the hook or ring that existed on the ceiling. The hook and ring do not come with the luminaire, the user should buy the appropriate hook or ring needed for installation. (see Fig. "A" below):

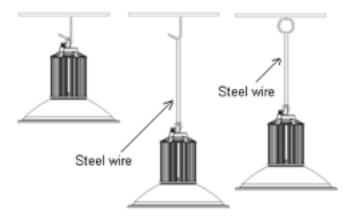


Fig. A

2. Make wire connections, connect the power supply thats in the outlet box to the black wire to (L), White to (N), Green to (Earth) (see Fig. "B" below):



Fig. B

MAINTENANCE:

The unit is designed for years with minimum care. When cleaning the fixture, make sure you have the power turned off and do not spray liquid cleaner directly onto the LED, socket, or wiring.

When the light does not work, make sure the power is off before inspection and it should be done by a qualified electrician.