



Item#: **90535**
LED DIRECT WIRE LINEAR T8
 INTERNAL DRIVER LAMP-STYLE RETROFIT KITS
 (UL TYPE B)

FEATURES


Our T8 LED tube lamp provides exceptional LED lighting with reduced energy and maintenance costs. The linear LED does not use a fluorescent ballast to work; instead they feature a built-in universal line voltage driver, making it a top of the line replacement for standard fluorescent lamps.

DIRECT WIRE - NO BALLAST REQUIRED, LAMPS RUNS OFF MAIN

- Exceptional efficacy

***Non-shunted sockets required, see install instructions for further details.*

LIGHT DISTRIBUTION CURVE

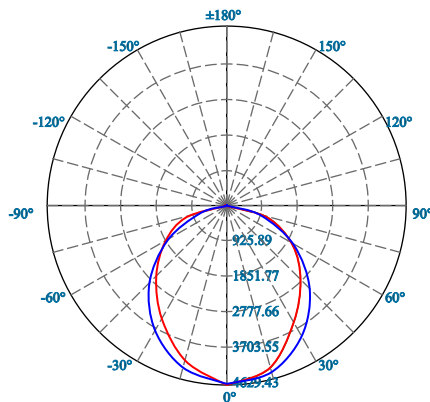

ELECTRICAL

| | |
|---------------------------------|----------|
| Wattage | 18W |
| Voltage | 100-277V |
| Current | 82-200mA |
| Power Factor | 0.9 |
| Total Harmonic Distortion (THD) | N/A |

LIGHTING PERFORMANCE

| | |
|---------------------------|---------|
| Lumens | 1915 |
| Lumens Per Watt (Lm/W) | 100 |
| Color Temperature (CCT) | 3500K |
| Color Rendering (CRI) | 82 |
| R9 (Red Value) | 1 |
| R13 (Skin Tones) | 83 |
| Beam Angle | 160° |
| Light Distribution | Type VS |
| Dimmable Lighting Control | |

ENVIRONMENT

| | |
|---------------------------|-------------|
| Operating Temperature | -4° ~ 113°F |
| Suitable Location | DAMP |
| Ingress Protection Rating | IP20 |
| Suitable Fixture Type | Enclosed |

LIFESPAN

| | |
|----------------------|----------|
| Average Life (Hours) | 50,000 |
| Warranty (Years) | 5 |

COMPONENTS

| | |
|------------------|------------------|
| LED Light Source | Everlight 67-21S |
|------------------|------------------|

CONSTRUCTION

| | |
|---------------------|--------------------------|
| Housing | Glass / Plastic End Caps |
| Lens | Frosted / Safety Coated |
| Base / Power Supply | G5 - Mini Bi Pin |

QUALIFICATIONS



Published lumens on LED products are approximate and may vary slightly.

PERFORMANCE DATA

PACKAGING


Item#: **90535**
LED DIRECT WIRE LINEAR T8



DIMENSIONS (Inches)

| | |
|----------------------|-----|
| Length (MOL) | 48" |
| Width/Diameter (MOD) | 1" |
| Weight (Lbs) | -- |

Line drawings may not be to scale and are for general reference only.



SUPPORTING DOCUMENTS (Grey = not available at this time.)

| | |
|----------------------------|------|
| Product Sheet | VIEW |
| Install Instructions | VIEW |
| IES Download from Web Item | VIEW |
| Photometric 4 Lamp | VIEW |
| Photometric 6 Lamp | VIEW |
| LM79 | VIEW |
| LM80 | VIEW |

PACKAGING

| | | UPC | DIMENSIONS (LxWxH) | GROSS WEIGHT (Lbs) |
|-------------------|--------------|----------------|--------------------|--------------------|
| Master Carton | 25 | 10811768026389 | -- | -- |
| Individual Box | 1 | 811768026382 | -- | -- |
| Country of Origin | China | | | |
| HS Tariff | 8539.50.0050 | | | |

ORDERING

| ITEM# | DESCRIPTION | CASE |
|-------|---|------|
| 90535 | LED 4' 18WT8/35K/FR/SAFETY COATED/V4 - SUPERIOR LIFE® | 25 |

ADDITIONAL INFORMATION:

- PQL Direct-Wire (UL Type B) Lamps are designed for use with PQL LED-Ready fixtures (follow lamp wiring instructions). When using any alternate-brand fixture, please review the specific PQL lamp installation guide wiring requirements first, to make sure the fixture is compatible before lamp installation.

PERFORMANCE DATA

PACKAGING