



## TEST REPORT

Applicant: P.Q.L., Inc.  
2285 Ward Avenue  
Simi Valley, CA 93065

Number: 130600616SHA-106

Date: July 14, 2014

### Sample Description

Product : Fixed Luminaire

Brand Name : SUPERIOR LIFE®

Manufacturer : Same as applicant

Model No : 90813 DIM(4000K)

Electrical Rating : 120V, 60HZ, 45W, 3850Lm

No. of Submitted Samples : 1 piece

Date Received : July 09, 2014

Date Test Conducted : July 09, 2014 ~ July 14, 2014

Test Requested : IN SITU TEMPERATURE MEASUREMENT TEST

Test Method : See the attached sheets.

Test Result : See the attached sheets. Measurement uncertainty for applicable tests has been established.

\*\*\*\*\* End of Page \*\*\*\*\*

Prepared by: Jordan Rao  
Intertek Testing Services  
Shanghai

Engineer  
Luminaires Division

Reviewed by: Jimmy Wang  
Intertek Testing Services  
Shanghai

Reviewer  
Luminaires Division

- The test report only allows to be revised within the retention period unless further standard or the requirement was noticed.
- This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.



# TEST REPORT

Test Result:

Number: 130600616SHA-106

Description : Fixed Luminaire

Design : Indoor Applications-New,Fully Integrated Luminaires

Test Sample Size : 1 piece

## 1. Measuring Method

### 1.1 Temperature Measurement Test

The sampel was operated at 25°C until constant temperatures were obtained. A temperature was considered constant if sample was operating for at least three hours and upon three successive readings-taken at 15 minute intervals- were within one degree and were not rising.

Thermocouples were attached at locations described in the results by means of a cement made of water glass and Fuller's earth, solder, or epoxy.

### 1.2 Driver current Measurement Test

During the temperature measurement test, measure the forward current for each LED package/array/module.

### 1.3 Equipment List

Equipment Used	Model Number	Control Number
Draught-proof enclosure	N/A	EC2201
Agilent - Data Acquisition Unit	34970A	EC2043
QINGZHI - Power Meter	8770A	EC2652
YOKOGAWA - Digital Power Meter	WT-210	EC4553

\*\*\*\*\* End of Page \*\*\*\*\*

# TEST REPORT

Test Result:

Number: 130600616SHA-106

## 2. Test Result

Input Voltage - 120Vac 60Hz


Ambient temperature: 25±5°C, Relative Humidity: 35%

Test Model: 90813 DIM(4000K)

Test LED model:LM561B

Test Location:

TMP

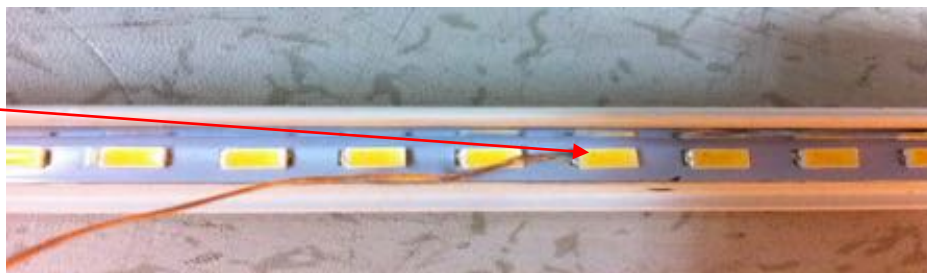

### In-Situ Maximum Measured LED Source Point Temperature

Maximum Junction Temperature from LED specification ( $T_j$ ) =110°C

Thermal Resistance Formula from LED specification = 16°C/W

Maximum Forward Voltage ( $V_f$ ) from LED specification = 3,2V

Measured LED Current =90.4mA

Calculated LED Wattage =  $V_f \times$  Measured LED Current =0.289W

Maximum Source Temperature ( $T_s$ ) =  $T_j - (LED \text{ Wattage} \times \text{Thermal Resistance}) =105.37^\circ$

Item	Symbol	Rating	Condition
LED junction temperature	$T_j$	110°C	-
Forward Current	$I_F$	150 mA	-
Peak Pulsed Forward Current	$I_{FP}$	300 mA	Duty 1/10 pulse width 10ms
Thermal resistance	$R_{th, j-s}$	16°C/W	Junction to solder point

Item	Symbol	Test Condition	Limit	
			Min	Max
Forward Voltage	$V_F$	$I_F = 65 \text{ mA}$	Init. Value*0.9	Init. Value*1.1

Intertek Sample No.	Model no.	Maximum Measured Source Temperature (°C)	Maximum Rated Source Temperature (°C)
0140704-07-006	90813 DIM(4000K)	49.3	105.37

\*\*\*\*\* End of Page \*\*\*\*\*

### 3. Lumen Maintenance Life Projection

The Calculation is based on the Illumination Engineering Society’s TM-21-11: Projecting Long Term Lumen Maintenance of LED Light Sources.

LM-80 Testing Details	
Total number of units tested per case temperature:	25
Number of failures:	0
Number of units measured:	25
Test duration (hours):	6000
Tested drive current (mA):	150
Tested case temperature 1 (Tc, °C):	55
Tested case temperature 2 (Tc, °C):	85
Tested case temperature 3 (Tc, °C):	105

In-Situ Inputs	
Drive current for each LED package/array/module (mA):	90.4
In-situ case temperature (Tc, °C):	49.3
Percentage of initial lumens to project to (e.g. for L70, enter 70):	70

Projection based on <i>in-situ</i> temperature entered	
$T_{s,1}$ (°C)	55.00
$T_{s,1}$ (K)	328.15
$\alpha_1$	2.658E-06
$B_1$	0.999
$T_{s,2}$ (°C)	-
$T_{s,2}$ (K)	-
$\alpha_2$	-
$B_2$	-
$E_a/k_b$	-
A	-
$B_0$	0.999
$T_{s,i}$ (°C)	49.3
$T_{s,i}$ (K)	322.45
$\alpha_i$	2.658E-06
Projected L70(6k) at 80°C (hours)	134,000
Reported L70(6k) at 80°C (hours)	>36000


\*\*\*\*\* End of Page \*\*\*\*\*

# TEST REPORT

Appendix A:

Number: 130600616SHA-106

Product Photo:

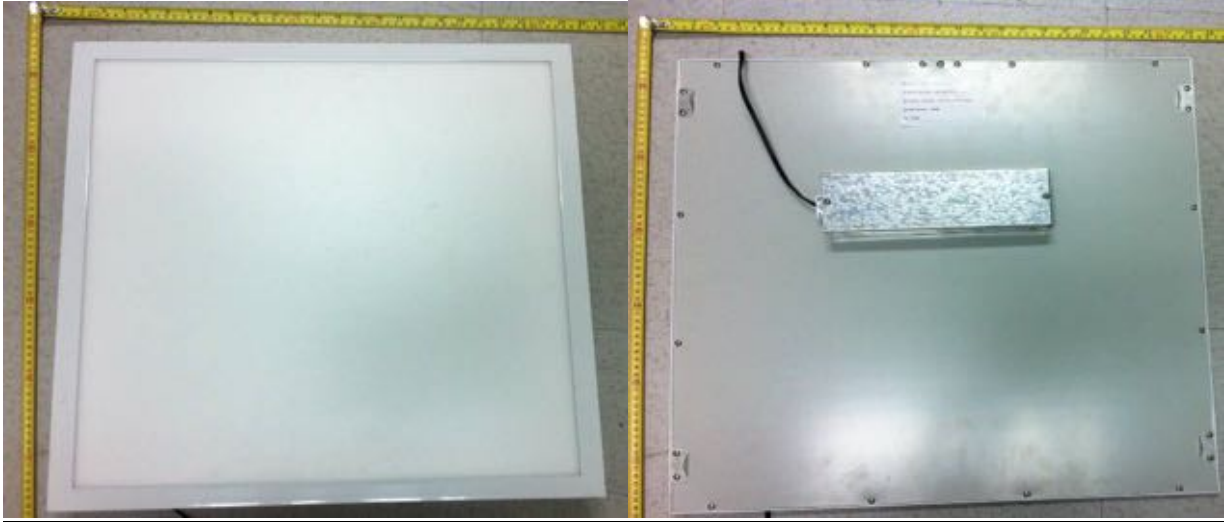

Model No.: 90813 DIM(4000K)

\*\*\*\*\* End of Report \*\*\*\*\*