



Item#: **91072**

LED A19 LAMP

GENERAL PURPOSE REPLACEMENT

The Superior Life® lamps are an efficient way to light sockets once reserved for traditional lamps. They consume less energy, thereby significantly reducing operating costs. The superior life hours of this lamp make it ideal for hard to reach places, reducing maintenance.


FEATURES

- Lightweight and easy installation
- Consume up to 80% less energy
- Long lasting light compared to alternative lights

APPLICATION

A replacement for traditional light bulbs around the home and other commercial needs.

LIGHT DISTRIBUTION CURVE

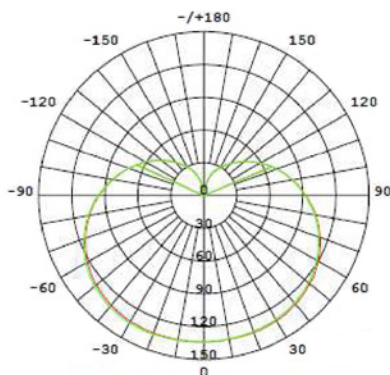

ELECTRICAL

Wattage	11W
Voltage	120V
Current	95mA
Power Factor	0.9
Total Harmonic Distortion (THD)	16

LIGHTING PERFORMANCE

Lumens	1100
Lumens Per Watt (Lm/W)	100
Color Temperature (CCT)	5000K
Color Rendering (CRI)	85
Beam Angle	230°

Dimmable Lighting Control *Dimmable*
see compatibility report

ENVIRONMENT

Operating Temperature	-4° ~ 113°F
Suitable Location	DAMP
Ingress Protection Rating	N/A
Suitable Fixture Type	Open

LIFESPAN

Average Life (Hours)	25,000
Warranty (Years)	3

COMPONENTS

LED Light Source	Luminus MP-3020
------------------	-----------------

CONSTRUCTION

Housing	Aluminum / Plastic
Base / Power Supply	E26 - Medium
Finish	White

QUALIFICATIONS



Published lumens on LED products are approximate and may vary slightly.

PERFORMANCE DATA

PACKAGING


Item#: **91072**
LED A19 LAMP



DIMENSIONS (Inches)

Length (MOL)	4.4"
Width/Diameter (MOD)	2.4"
Weight (Lbs)	--

Line drawings may not be to scale and are for general reference only.

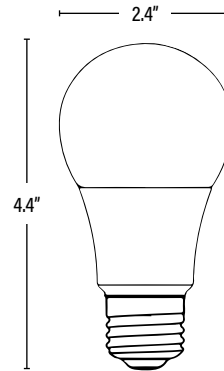

SUPPORTING DOCUMENTS (Grey = not available at this time.)

Product Sheet	VIEW
Dimmer Compatibility	VIEW
LM79	VIEW
LM80	VIEW

PACKAGING

		UPC	DIMENSIONS (LxWxH)	GROSS WEIGHT (Lbs)
Master Carton	48	10811768029243	--	--
Individual Box	1	811768029246	2.5" x 2.5" x 4.7"	0.1
Country of Origin	China			
HS Tariff	8539.50.0010			

ORDERING

ITEM#	DESCRIPTION	CASE
91072	LED 11A19/OMNI/50K/DIMMABLE - SUPERIOR LIFE®	48

ADDITIONAL INFORMATION:

Family Items: 91069/2700K - 91070/3000K

PERFORMANCE DATA

PACKAGING