



Item#: **91240**
LED 180° PL DIRECT WIRE
 FOUR PIN-BASE REPLACEMENT LAMP FOR CFL

FEATURES

- Simple rewiring allows lamp to run off the main
- Exceptional efficacy
- Universal voltage using direct wire

APPLICATION

Replaces CFL PL lamps with G24q/4 Pin base, frequently used in downlights.

ELECTRICAL

Wattage	6W
Voltage	120-277V
Current	55mA
Power Factor	--

LIGHTING PERFORMANCE

Lumens	500
Lumens Per Watt (Lm/W)	83
Color Temperature (CCT)	3500K
Color Rendering (CRI)	83
Beam Angle	180°

Dimmable Lighting Control



ENVIRONMENT

Operating Temperature	-4° ~ 113°F
Suitable Location	DAMP
Ingress Protection Rating	IP20
Fixture Type	Enclosed

LIFESPAN

Average Life (Hours)	50,000
Warranty (Years)	5

COMPONENTS

LED Light Source	--
------------------	----

CONSTRUCTION

Housing	Aluminum / PC
Lens	Frosted
Base / Power Supply	G24q / 4 Pin
Finish	White

QUALIFICATIONS



Published lumens on LED products are approximate and may vary slightly.

PERFORMANCE DATA

PACKAGING

Item#: **91240**
LED 180° PL DIRECT WIRE




DIMENSIONS (Inches)

Length (MOL)	5.4"
Width/Diameter (MOD)	1.1"
Weight (Lbs)	0.1

Line drawings may not be to scale and are for general reference only.

SUPPORTING DOCUMENTS (Grey = not available at this time.)

Product Sheet	VIEW
Install Instructions	VIEW

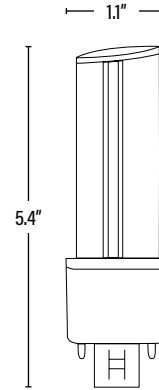

PACKAGING

		UPC	DIMENSIONS (LxWxH)	GROSS WEIGHT (Lbs)
Master Carton	50	10811768026907	17.7" x 8.9" x 6.7"	13.2
Inner Carton	10	20811768026904	--	--
Individual Box	1	811768026900	6.4" x 1.7" x 1.7"	0.3
Country of Origin	China			
HS Tariff	8539.50.0010			

ORDERING

ITEM#	DESCRIPTION	TITLE 20	CASE
91240	LED 6WT10/180°/FR/35K/G24q/4 PIN/120-277V - SUPERIOR LIFE®	N/A	50

ADDITIONAL INFORMATION:

Family Items: 91241/4000K • 91242/5000K

PERFORMANCE DATA

PACKAGING