Item#: 91315
LED PLUG & GO™ LINEAR T8
REPLACEMENT LAMPS (PLUG AND PLAY)
(UL TYPE A)

FEATURES

Our T8 LED tube can work with the most popular electronic ballasts that are capable of replacing your existing fluorescent T8 lamps without any additional wiring. It provides exceptional LED lighting with reduced energy and maintenance costs.

PLUG & GO™ - WORKS WITH EXISTING ELECTRONIC BALLAST*

- Exceptional efficacy
- No flickering
- ETL Sanitation Listed (NSF-2)

Suitable for emergency ballasts.

LIGHT DISTRIBUTION CURVE
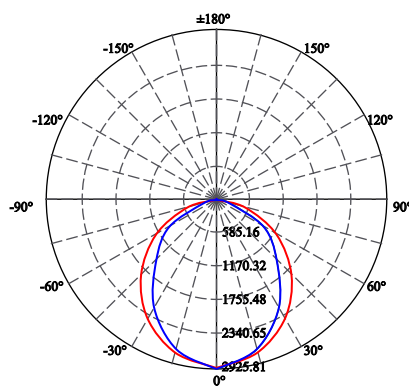
ELECTRICAL	LAMP	DLC® SYSTEM POWER
Wattage	13W	16W
Voltage	120-277V	
Current	0.281A	
Power Factor	0.9	
Total Harmonic Distortion (THD)	12.4	

LIGHTING PERFORMANCE		
Lumens	2000	
Lumens Per Watt (LPW)	125	
Color Temperature (CCT)	5000K	
Color Rendering (CRI)	83	
R9 (Red Value)	1	
R13 (Skin Tones)	81	
Beam Angle	180°	
Light Distribution	Type VS	
BUG Rating (Backlight, Uplight, and Glare)	4 Lamp	B3 - U3 - G2
	6 Lamp	B3 - U4 - G2
Dimmable Lighting Control	Compatible with select dimming ballasts.	

ENVIRONMENT	
Operating Temperature	-4° ~ 113°F
Suitable Location	DAMP
Ingress Protection Rating	IP20
Suitable Fixture Type	Enclosed

LIFESPAN	
Average Life (Hours)	50,000
Warranty (Years)	**5**

COMPONENTS	
LED Light Source	Everlight 67-21S

CONSTRUCTION	
Housing	Glass / Plastic End Caps
Lens	Frosted / Safety Coated
Base / Power Supply	G13 - Medium Bi Pin

QUALIFICATIONS

UL CERTIFIED · ETL · DLC LISTED · RoHS compliant · CEE

Visit www.designlights.org/search to confirm qualification. · DLC lists the wattage of the system power. · Published lumens on LED products are approximate and may vary slightly. · Specifications are subject to change without notice.

PREMIUM QUALITY LIGHTING® · Phone: 800-323-8107
© **P.Q.L., Inc.** · 2285 Ward Avenue · Simi Valley, CA 93065

www.PQLighting.com
Photos and drawings may not be to scale and are for general reference only.

Rev: 09/29/2022

PQL
PREMIUM QUALITY LIGHTING®

DIMENSIONS (Inches)

Length (MOL)	48"
Width/Diameter (MOD)	1"
Net Weight (Lbs)	--

SUPPORTING DOCUMENTS *(Grey = not available at this time.)*

Product Sheet	VIEW
Install Instructions	VIEW
Ballast Compatibility	VIEW
IES Download from Web Item	VIEW
Photometric 4 Lamp	VIEW
Photometric 6 Lamp	VIEW
LM79	VIEW
LM80	VIEW

48"

1"

PACKAGING

		UPC	DIMENSIONS (LxWxH)	GROSS WEIGHT (Lbs)
Master Carton	25	10899645001575	50.2" x 7.3" x 7.3"	16.5
Individual Box	1	899645001578	--	0.66
Country of Origin	China			
HS Tariff	8539.50.0050			

ORDERING

ITEM#	DESCRIPTION	CASE
91315	LED 4FT 13WT8/50K/TYPE A/SAFETY COATED - **CEE/DLC**®	25

ADDITIONAL INFORMATION:

Family Item(s): 91313/3500K

PREMIUM QUALITY LIGHTING® ▪ Phone: 800-323-8107
© **P.Q.L., Inc.** ▪ 2285 Ward Avenue ▪ Simi Valley, CA 93065

www.PQLighting.com
Photos and drawings may not be to scale and are for general reference only.

Rev: 09/29/2022