



Item#: **91480**  
**PAR30/LN**  
**LED PAR LAMP**

**FEATURES**

- Superior lighting performance
- Innovative and durable design that resembles traditional lighting

**APPLICATION**

Indoor residential and commercial spaces, track lighting and recessed downlights.

**ELECTRICAL**

Wattage	25W
Voltage	120 - 277V
Current	158 - 78mA
Power Factor	0.7
Total Harmonic Distortion (THD)	--

**LIGHTING PERFORMANCE**

Lumens	2500
Lumens Per Watt (Lm/W)	100
Color Temperature (CCT)	4000K
Color Rendering (CRI)	80
R9 (Red Value)	--
R13 (Skin Tones)	--
Beam Angle	25°
Light Distribution	--
Dimmable Lighting Control	

**ENVIRONMENT**

Operating Temperature	--
Suitable Location	<b>DRY</b>
Ingress Protection Rating	N/A
Suitable Fixture Type	Open

**LIFESPAN**

Average Life (Hours)	25,000
Warranty (Years)	<b>2</b>

**COMPONENTS**

LED Light Source	--
------------------	----

**CONSTRUCTION**

Housing	Aluminum / PC
Base / Power Supply	E26 - Medium
Finish	White

**QUALIFICATIONS**



*Published lumens on LED products are approximate and may vary slightly.*

PERFORMANCE DATA

PACKAGING


Item#: **91480**  
**PAR30/LN**



**DIMENSIONS** (Inches)

Length (MOL)	4.7"
Width/Diameter (MOD)	3.7"
Weight (Lbs)	--

Line drawings may not be to scale and are for general reference only.

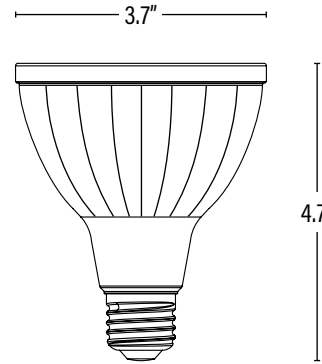

**SUPPORTING DOCUMENTS** (Grey = not available at this time.)

Product Sheet	VIEW
IES Download from Web Item	VIEW
LM79	VIEW
LM80	VIEW

**PACKAGING**

		UPC	DIMENSIONS (LxWxH)	GROSS WEIGHT (Lbs)
Master Carton	12	10811768026679	--	--
Individual Box	1	811768026672	3.9" x 3.9" x 4.9"	--
Country of Origin	China			
HS Tariff	9405.40.6000			

**ORDERING**

ITEM#	DESCRIPTION	CASE
91480	LED 25WPAR30/LN/25°/40K - SUPERIOR LIFE®	12

PERFORMANCE DATA

PACKAGING