

Item#: **91550**
LED TONE-SELECT™ CFL DIRECT WIRE
 FOUR PIN-BASE REPLACEMENT LAMP FOR CFL

FEATURES

- Adjustable color temperature for custom lighting application.
- Exceptional efficacy.
- Universal voltage using direct wire.
- Rotating base for precise positioning.
- Simple rewiring allows lamp to run off the main.

- APPLICATION

Replaces traditional CFL lamps frequently used in downlights and sconces.

**Not suitable for use with emergency exits or lighting.*

PERFORMANCE DATA

ELECTRICAL

Wattage	11W
Voltage	120-277V
Current	100mA
Power Factor	--

LIGHTING PERFORMANCE

Lumens	1400-1500
Lumens Per Watt (Lm/W)	127-136
Color Temperature (CCT)	27K / 30K / 35K / 40K / 50K
Color Rendering (CRI)	83
Beam Angle	120°
Light Distribution	Type III, Very Short
BUG Rating (Backlight, Uplight, and Glare)	B1 - U3 - G1
Dimmable Lighting Control	

ENVIRONMENT

Operating Temperature	-4° ~ 113°F
Suitable Location	DAMP
Ingress Protection Rating	IP20
Fixture Type	Enclosed

LIFESPAN

Average Life (Hours)	50,000
Warranty (Years)	5

COMPONENTS

LED Light Source	Samsung
------------------	---------

CONSTRUCTION

Housing	Aluminum / PC
Lens	Frosted
Base / Power Supply	G24q / 4 Pin
Finish	White / Silver

QUALIFICATIONS




Published lumens on LED products are approximate and may vary slightly.

Item#: **91550**
LED TONE-SELECT™ CFL DIRECT WIRE



DIMENSIONS (Inches)

Length (MOL)	6.4"
Width/Diameter (MOD)	1.4"
Weight (Lbs)	--



SUPPORTING DOCUMENTS (Grey = not available at this time.)

Product Sheet	VIEW
Install Instructions	VIEW
IES Download from Web Item	VIEW
LM79	VIEW
LM80	VIEW

PACKAGING

		UPC	DIMENSIONS (LxWxH)	GROSS WEIGHT (Lbs)
Master Carton	50	10811768021858	17.7" x 8.9" x 7.7"	--
Inner Carton	10	20811768021855	--	--
Individual Box	1	811768021851	7.3" x 1.7" x 1.7"	--
Country of Origin	China			
HS Tariff	8539.50.0010			


ORDERING

ITEM#	DESCRIPTION	TITLE 20	CASE
91550	LED TONE-SELECT™ 11WT10/120°/FR/27/30/35/40/50K/G24q/4 PIN/120-277V - SUPERIOR LIFE®	N/A	50

ADDITIONAL INFORMATION:

CCT DIP SWITCH SETTINGS

CCT	Switch 1	Switch 2	Switch 3
2700K	--	ON	--
3000K	ON	--	ON
3500K	--	ON	ON
4000K	ON	--	--
5000K	--	--	ON

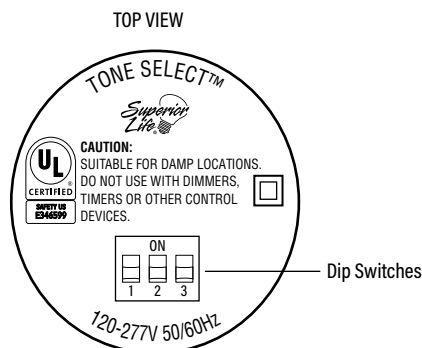

ITEM INFORMATION