



Item#: **91735**  
**LED PAR20 LAMP**  
 REFLECTOR (NARROW FLOOD)

**FEATURES**

- Superior lighting performance
- Energy efficient
- Innovative and durable design that resembles traditional lighting

**APPLICATION**

- Indoor residential and commercial spaces, track lighting and recessed downlights.

**ELECTRICAL**

Wattage	8W
Voltage	120V
Current	78mA
Power Factor	0.7
Total Harmonic Distortion (THD)	--

**LIGHTING PERFORMANCE**

Lumens	500
Lumens Per Watt (Lm/W)	63
Color Temperature (CCT)	3000K
Color Rendering (CRI)	94
R9 (Red Value)	71
R13 (Skin Tones)	--
Beam Angle	25°
Light Distribution	--
Dimmable Lighting Control	<i>Dimmable</i> see compatibility report

**ENVIRONMENT**

Operating Temperature	-40° ~ 104°F
Suitable Location	<b>DAMP</b>
Ingress Protection Rating	N/A
Suitable Fixture Type	Enclosed

**LIFESPAN**

Average Life (Hours)	15,000
Warranty (Years)	<b>3</b>

**COMPONENTS**

LED Light Source	--
------------------	----

**CONSTRUCTION**

Housing	Aluminum / PC
Base / Power Supply	E26 - Medium
Finish	White

**QUALIFICATIONS**



Published lumens on LED products are approximate and may vary slightly. • Please check Energy Star website for the most current list of approved items • [www.energystar.gov](http://www.energystar.gov)

PERFORMANCE DATA

PACKAGING


Item#: **91735**  
**LED PAR20 LAMP**



**DIMENSIONS** (Inches)

Length (MOL)	3.3"
Width/Diameter (MOD)	2.5"
Weight (Lbs)	--

Line drawings may not be to scale and are for general reference only.

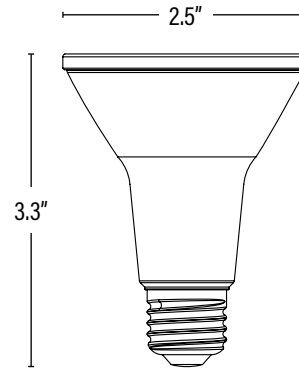

**SUPPORTING DOCUMENTS** (Grey = not available at this time.)

Product Sheet	VIEW
Dimmer Compatibility	VIEW
IES Download from Web Item	VIEW
LM79	VIEW
LM80	VIEW

**PACKAGING**

		UPC	DIMENSIONS (LxWxH)	GROSS WEIGHT (Lbs)
Master Carton	48	10811768023371	--	--
Individual Box	1	811768025477	2.5" x 2.5" x 3.6"	--
Country of Origin	China			
HS Tariff	9405.40.6000			

**ORDERING**

ITEM#	DESCRIPTION	CASE
91735	LED 8WPAR20/30K/25°/DIMMABLE/V6 - SUPERIOR LIFE® <b>ENERGY STAR®</b>	48

**ADDITIONAL INFORMATION:**

Family Items: 91734/2700K • 91736/4000K • 91737/5000K

PERFORMANCE DATA

PACKAGING