



Item#: **91805**  
**LED HIGH WATTAGE 360° LAMP**  
 REPLACEMENT LAMPS FOR OUTDOOR POLE/ARM  
 MOUNTED DECORATIVE LUMINAIRES (TYPE B)

**FEATURES**

- Uses patented remote activated phosphor technology which increases lifespan by reducing temperatures.
- More consistent light output and color stability.
- High lumen output.
- 360° optical design that provides even light distribution.
- Surge Protection (5KV).
- Replaces high pressure sodium metal halide lamps.

**APPLICATION**

Replacement lamps for top post, high bays, parking lots and street lighting.

*\*Not suitable for use with emergency exits.*

**ELECTRICAL**

Wattage	24W
Voltage	120-277V
Current	0.2A
Power Factor	0.9
Total Harmonic Distortion (THD)	--

**LIGHTING PERFORMANCE**

Lumens	3403
Lumens Per Watt (Lm/W)	142
Color Temperature (CCT)	5000K
Color Rendering (CRI)	83
R9 (Red Value)	9
R13 (Skin Tones)	84
Beam Angle	270°
Light Distribution	--
Dimmable Lighting Control	

**ENVIRONMENT**

Operating Temperature	-4° ~ 131°F
Suitable Location	<b>DAMP</b>
Ingress Protection Rating	IP64
Fixture Type	Enclosed

**LIFESPAN**

Average Life (Hours)	50,000
Warranty (Years)	<b>5</b>

**COMPONENTS**

LED Light Source	--
------------------	----

**CONSTRUCTION**

Housing	--
Lens	--
Base / Power Supply	E26 - Medium

**QUALIFICATIONS**



*Published lumens on LED products are approximate and may vary slightly.*

PERFORMANCE DATA

PACKAGING


Item#: **91805**  
**LED HIGH WATTAGE 360° LAMP**



**DIMENSIONS** (Inches)

Length (MOL)	7.4"
Width/Diameter (MOD)	3.3"
Weight (Lbs)	--

Line drawings may not be to scale and are for general reference only.

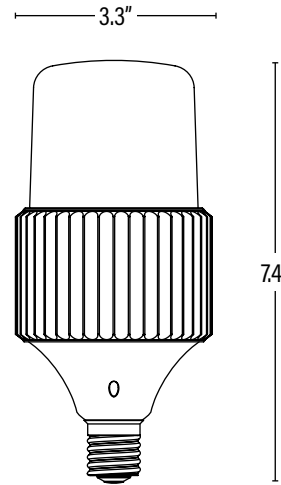

**SUPPORTING DOCUMENTS** (Grey = not available at this time.)

Product Sheet	VIEW
Install Instructions	VIEW
IES Download from Web Item	VIEW
Photometric	VIEW
LM79	VIEW
LM80	VIEW

**PACKAGING**

		UPC	DIMENSIONS (LxWxH)	GROSS WEIGHT (Lbs)
Master Carton	20	10811768020165	20.9" x 16.9" x 9.5"	17.5
Individual Box	1	811768020168	3.6" x 3.6" x 8"	0.9
Country of Origin	China			
HS Tariff	9405.40.8200			

**ORDERING**

ITEM#	DESCRIPTION	CASE
91805	LED 25WT26/360°/50K/MED/120-277V - SUPERIOR LIFE®	20

**ADDITIONAL INFORMATION:**

Family Item: 91804/3000K

PERFORMANCE DATA

PACKAGING