



Item#: 93092 LED 6" TONE-SELECT™ SLIM DOWNLIGHT INDOOR FIXTURE

FEATURES

- Adjustable color temperature for custom lighting application.
- Energy efficient: save up to 80% in energy costs
- No flickering or noise.
- Instant-0n.
- · Suitable for Type IC.

APPLICATION

Ideal for retrofitting inefficient fixtures in malls, hospitals, airports, offices, lobbies and other commercial applications.

ELECTRICAL

Wattage	15W
Voltage	120V
Current	0.17A
Power Factor	0.9
Total Harmonic Distortion (THD)	

LIGHTING PERFORMANCE

Lumens	1100		
Lumens Per Watt (LPW)	73		
Color Temperature (CCT)	27K / 30K / 35K / 40K / 50K		
Color Rendering (CRI)	90		
R9 (Red Value)	58		
Beam Angle	110°		
Light Distribution	Type VS		
BUG Rating (Backlight, Uplight, and Glare)	B1 - U1 - G1		
Dimmable Lighting Control	Dimmable see compatibility report		

ENVIRONMENT

Operating Temperature	-4° ~ 104°F
Suitable Location	WET Indoor / Covered Ceilings
Ingress Protection Rating	IP43

LIFESPAN

Average Life (Hours)	50,000
Warranty (Years)	5

COMPONENTS

LED Light Source	Opto 2835	
Driver		

CONSTRUCTION

Housing	Aluminum / PC		
Base / Power Supply	Hard Wired		
Finish	White		

QUALIFICATIONS




Published lumens on LED products are approximate and may vary slightly. • Specifications are subject to change without notice.

Item#: **93092 LED 6" TONE-SELECT™ SLIM DOWNLIGHT**



DIMENSIONS (Inches)	
Length (MOL)	0.6"
Width/Diameter (MOD)	6.6"
Net Weight (Lbs)	

SUPPORTING DOCUMENTS (Grey = not available at this time.)		
Product Sheet	VIEW	
Install Instructions	VIEW	
Dimmer Compatibility	VIEW	
IES Download from Web Item	VIEW	
LM79	VIEW	
LM80	VIEW	

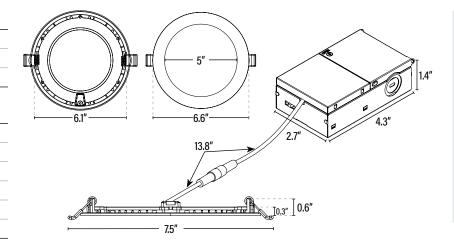

PACKAGING		UPC	DIMENSIONS (LxWxH)	GROSS WEIGHT (Lbs)
Master Carton	12	10811768027034		
Individual Box	1	811768027037	6.9" x 6.9" x 2.9"	
Country of Origin	China			
HS Tariff				

ORDERING

ITEM#	DESCRIPTION	CASE
93092	LED 6IN TONE-SELECT™ SLIM DOWNLIGHT/15W/27-50K/DIMM/120V	12

ADDITIONAL INFORMATION:

• Using the CCT slider on the side of the driver box to select the desired color temperature prior to installation.