


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:120.07V I:0.2105A P:25.056W PF:0.9914 Freq:59.98Hz UTHDi:0% ITHDi:0% Lamp Flux:2964.65x1 lm		
NAME: 94020	TYPE: 26W	WEIGHT:
SPEC.: 4000K	DIM.:	SERIAL No.: 1
MFR.: P.Q.L., Inc.	SUR.: 0.019	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 118.32 lm/W			
MODEL	LTS-26W-PS-3CCT-W	I _{max} (cd)	715.9	S/MH (C0/180)	1.25
NOMINAL POWER (W)	26	LOR (%)	100.0	S/MH (C90/270)	1.13
RATED VOLTAGE (V)	120	TOTAL FLUX (lm)	2964.6	η UP, DN (C0-180)	7.4, 48.9
NOMINAL FLUX (lm)	2964.65	CIE CLASS	SEMI-D.	η UP, DN (C180-360)	5.4, 38.3
LAMPS INSIDE	1	η up (%)	12.8	CIBSE SHR NOM	1.50
TEST VOLTAGE (V)	120	η down (%)	87.2	CIBSE SHR MAX	1.50

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

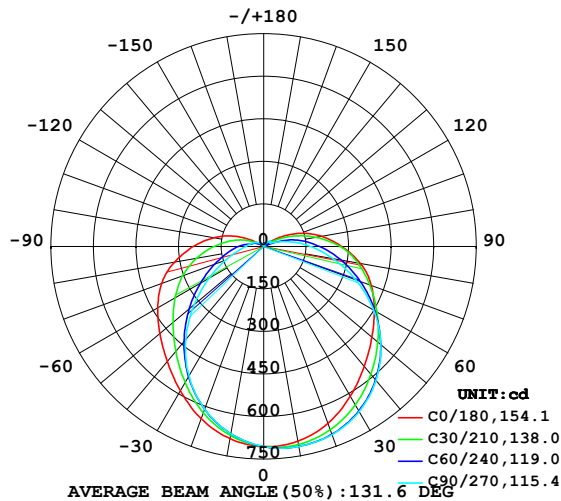

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

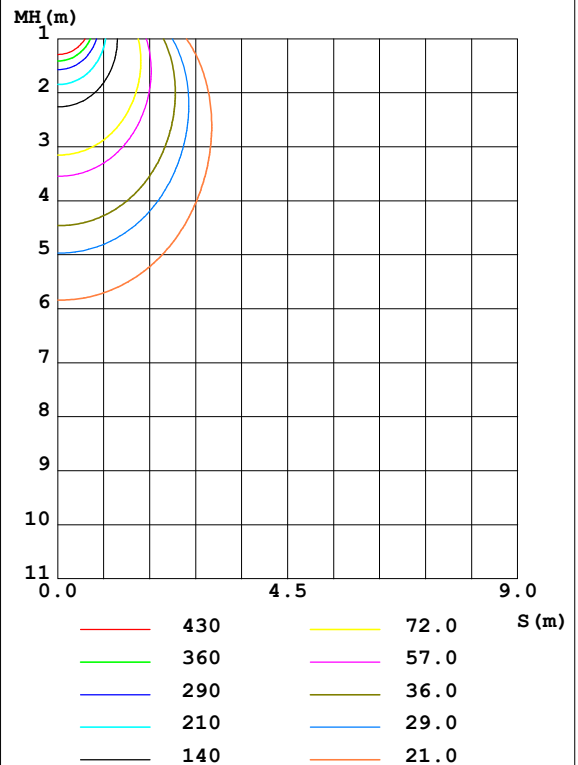

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2020-05-13

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.426
Humidity: 65.0%
Test Distance: 8.690m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	697.3	712.3	715.9	703.6	688.0	673.7	670.3	682.0	0- 10	66.76	66.76	2.25,2.25
20	663.5	695.9	705.9	677.8	646.1	617.3	610.0	633.7	10- 20	191.2	257.9	8.7,8.7
30	610.6	658.0	672.8	632.3	588.1	542.4	527.5	566.4	20- 30	290.5	548.4	18.5,18.5
40	552.1	601.0	616.3	574.7	529.7	460.0	427.6	492.0	30- 40	354.9	903.3	30.5,30.5
50	498.4	531.9	539.9	512.5	477.9	380.7	320.1	422.5	40- 50	383.6	1287	43.4,43.4
60	450.5	457.0	447.8	449.9	431.6	309.2	221.2	361.7	50- 60	382.0	1669	56.3,56.3
70	404.3	380.9	346.5	388.0	383.2	244.9	144.3	305.6	60- 70	356.1	2025	68.3,68.3
80	346.2	307.4	248.0	322.6	319.5	184.7	91.84	244.9	70- 80	310.4	2335	78.8,78.8
90	275.1	233.8	166.0	250.6	248.5	132.5	64.18	184.9	80- 90	248.8	2584	87.2,87.2
100	208.1	158.3	96.82	168.0	178.7	83.90	49.48	130.0	90-100	181.2	2765	93.3,93.3
110	137.6	74.90	46.23	68.93	106.3	49.69	38.48	72.50	100-110	109.0	2874	97,97
120	65.48	31.60	26.02	15.16	30.65	15.58	28.65	30.35	110-120	47.44	2922	98.6,98.6
130	17.63	16.70	31.08	17.18	14.53	15.52	17.55	16.74	120-130	19.91	2942	99.2,99.2
140	8.901	13.61	17.74	9.256	7.761	9.279	12.75	9.164	130-140	10.18	2952	99.6,99.6
150	8.925	6.041	4.821	12.38	11.37	8.169	9.073	8.117	140-150	6.405	2958	99.8,99.8
160	9.904	8.251	6.067	8.918	8.164	7.524	6.267	7.178	150-160	3.421	2962	99.9,99.9
170	7.557	7.938	11.12	7.189	7.404	7.418	6.687	7.789	160-170	2.141	2964	100,100
180	10.50	9.977	9.404	10.09	10.50	9.924	9.330	10.07	170-180	0.7708	2965	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2020-05-13

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.426
Humidity:65.0%
Test Distance:8.690m [K=1.0000]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:120.07V I:0.2105A P:25.056W PF:0.9914 Freq:59.98Hz UTHDi:0% ITHDi:0% Lamp Flux:2964.65x1 lm		
NAME: 94020	TYPE: 26W	WEIGHT:
SPEC.: 4000K	DIM.:	SERIAL No.: 1
MFR.: P.Q.L., Inc.	SUR.: 0.019	Shielding Angle:

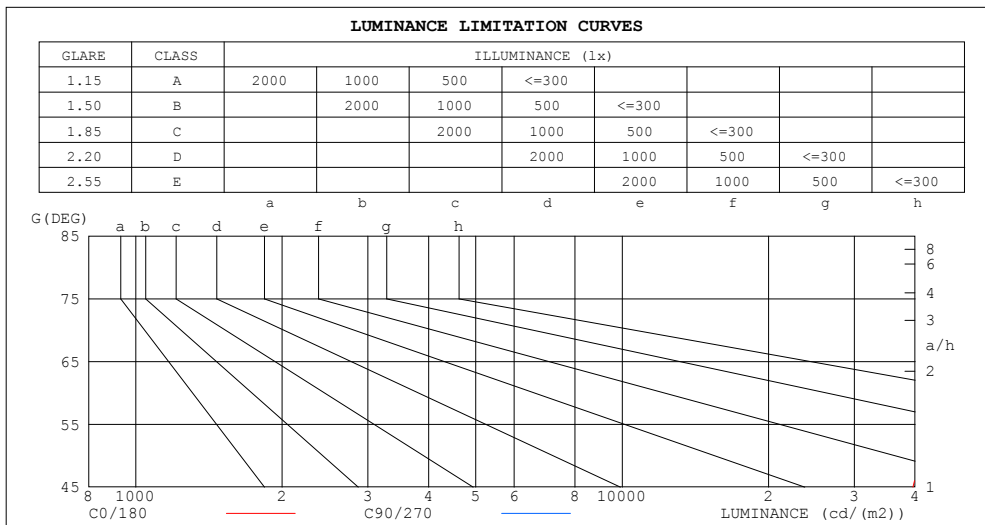

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	190284	122941
80	106433	74871
75	78013	59948
70	63097	53124
65	54048	49323
60	48096	46954
55	44104	45287
50	41384	44036
45	39579	43043


C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2020-05-13

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.690m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:120.07V I:0.2105A P:25.056W PF:0.9914 Freq:59.98Hz UTHDi:0% ITHDi:0% Lamp Flux:2964.65x1 lm		
NAME: 94020	TYPE: 26W	WEIGHT:
SPEC.: 4000K	DIM.:	SERIAL No.: 1
MFR.: P.Q.L., Inc.	SUR.: 0.019	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.16	1.16	1.16	1.12	1.12	1.12	1.04	1.04	1.04	.97	.97	.97	.90	.90	.90	.87
1.0	.96	.91	.86	.93	.88	.83	.86	.82	.78	.80	.76	.73	.74	.71	.69	.66
2.0	.82	.74	.67	.79	.72	.65	.73	.67	.62	.68	.63	.59	.63	.59	.55	.52
3.0	.71	.62	.55	.69	.60	.53	.64	.56	.51	.59	.53	.48	.55	.50	.46	.43
4.0	.62	.53	.45	.60	.51	.44	.56	.48	.42	.52	.46	.40	.48	.43	.39	.36
5.0	.55	.46	.39	.54	.45	.38	.50	.42	.36	.47	.40	.35	.43	.38	.33	.30
6.0	.50	.40	.33	.48	.39	.33	.45	.37	.31	.42	.35	.30	.39	.33	.29	.26
7.0	.45	.36	.29	.43	.35	.29	.41	.33	.28	.38	.31	.27	.36	.30	.25	.23
8.0	.41	.32	.26	.40	.31	.25	.37	.30	.24	.35	.28	.24	.33	.27	.23	.21
9.0	.37	.29	.23	.36	.28	.23	.34	.27	.22	.32	.26	.21	.30	.25	.20	.18
10.0	.34	.26	.21	.33	.26	.21	.32	.25	.20	.30	.24	.19	.28	.22	.18	.17

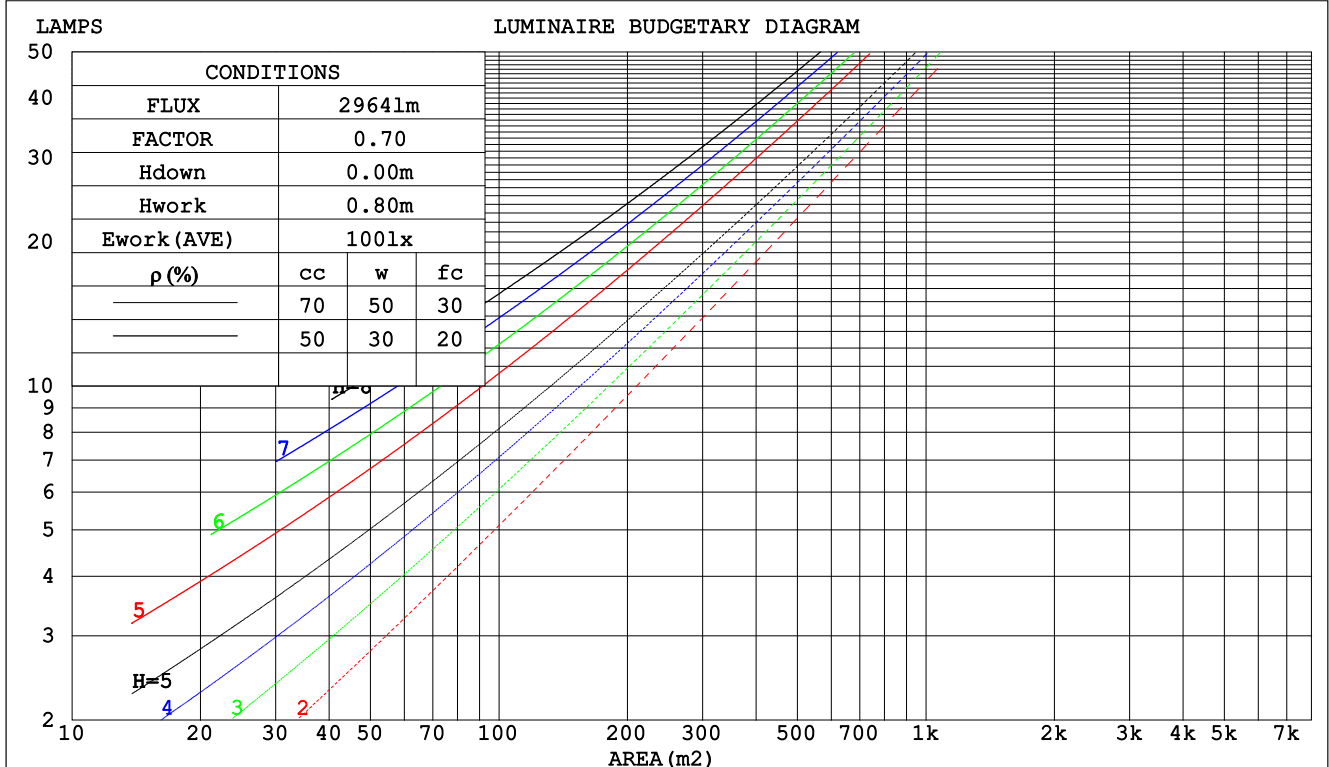

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2020-05-13

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.426
Humidity:65.0%
Test Distance:8.690m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:120.07V I:0.2105A P:25.056W PF:0.9914 Freq:59.98Hz UTHDi:0% ITHDi:0% Lamp Flux:2964.65x1 lm		
NAME: 94020	TYPE: 26W	WEIGHT:
SPEC.: 4000K	DIM.:	SERIAL No.: 1
MFR.: P.Q.L., Inc.	SUR.: 0.019	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)										
0.0																	
1.0	.399	.227	.072	.388	.221	.070	.367	.210	.067	.347	.200	.064	.330	.191	.062		
2.0	.342	.188	.058	.332	.183	.056	.314	.174	.054	.296	.166	.052	.280	.158	.050		
3.0	.303	.161	.048	.294	.157	.047	.277	.150	.046	.261	.143	.044	.246	.136	.042		
4.0	.272	.141	.041	.263	.138	.041	.248	.132	.039	.234	.126	.038	.221	.120	.037		
5.0	.246	.126	.036	.239	.123	.036	.225	.117	.035	.212	.112	.033	.200	.107	.032		
6.0	.225	.113	.032	.219	.110	.032	.206	.106	.031	.194	.101	.030	.183	.096	.029		
7.0	.207	.103	.029	.201	.100	.029	.190	.096	.028	.179	.092	.027	.169	.088	.026		
8.0	.192	.094	.026	.187	.092	.026	.176	.088	.025	.166	.084	.024	.157	.081	.023		
9.0	.179	.087	.024	.174	.085	.024	.164	.081	.023	.155	.078	.022	.147	.075	.022		
10.0	.167	.080	.022	.163	.079	.022	.154	.075	.021	.146	.072	.021	.138	.069	.020		

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.288	.288	.288	.246	.246	.246	.168	.168	.168	.097	.097	.097	.031	.031	.031	
1.0	.285	.254	.226	.244	.218	.194	.167	.150	.134	.096	.087	.078	.031	.028	.025	
2.0	.278	.231	.191	.238	.199	.165	.163	.138	.115	.094	.080	.068	.030	.026	.022	
3.0	.271	.214	.169	.232	.185	.147	.159	.128	.103	.092	.075	.061	.030	.024	.020	
4.0	.263	.202	.155	.225	.174	.135	.155	.121	.095	.090	.071	.056	.029	.023	.018	
5.0	.255	.192	.145	.219	.166	.126	.151	.116	.089	.087	.068	.053	.028	.022	.017	
6.0	.247	.184	.138	.212	.159	.120	.146	.111	.085	.085	.066	.051	.027	.021	.017	
7.0	.240	.177	.133	.206	.153	.116	.143	.108	.082	.083	.063	.049	.027	.021	.016	
8.0	.233	.171	.129	.201	.149	.113	.139	.104	.080	.081	.062	.048	.026	.020	.016	
9.0	.227	.167	.126	.195	.145	.110	.135	.102	.078	.079	.060	.047	.026	.020	.015	
10.0	.221	.162	.124	.190	.141	.108	.132	.099	.077	.077	.059	.046	.025	.019	.015	

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2020-05-13

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.426
Humidity:65.0%
Test Distance:8.690m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:120.07V I:0.2105A P:25.056W PF:0.9914 Freq:59.98Hz UTHDi:0% ITHDi:0%						Lamp Flux:2964.65x1 lm					
NAME: 94020				TYPE: 26W			WEIGHT:				
SPEC.: 4000K				DIM.:			SERIAL No.: 1				
MFR.: P.Q.L., Inc.				SUR.: 0.019			Shielding Angle:				
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions	Viewed crosswise					Viewed endwise					
x = 2H y = 2H	25.8	27.3	26.2	27.7	28.2	25.7	27.2	26.2	27.6	28.1	
	3H	28.4	29.8	28.9	30.2	30.7	27.9	29.3	28.4	29.7	30.2
	4H	29.9	31.2	30.4	31.7	32.2	29.1	30.3	29.6	30.8	31.4
	6H	31.5	32.7	32.0	33.2	33.8	30.2	31.4	30.7	31.9	32.5
	8H	32.4	33.6	32.9	34.1	34.6	30.9	32.0	31.4	32.5	33.1
	12H	33.4	34.5	33.9	35.0	35.6	31.6	32.7	32.1	33.2	33.8
4H	2H	26.6	27.9	27.1	28.4	28.9	26.6	27.9	27.1	28.3	28.9
	3H	29.4	30.6	30.0	31.1	31.7	29.0	30.1	29.5	30.6	31.2
	4H	31.1	32.1	31.6	32.7	33.3	30.3	31.3	30.8	31.9	32.5
	6H	32.9	33.8	33.5	34.4	35.0	31.6	32.6	32.2	33.2	33.8
	8H	33.9	34.8	34.5	35.3	36.0	32.4	33.3	33.0	33.8	34.5
	12H	35.0	35.8	35.6	36.4	37.1	33.2	34.0	33.8	34.6	35.3
8H	4H	31.6	32.5	32.2	33.1	33.7	30.9	31.8	31.5	32.4	33.1
	6H	33.7	34.5	34.3	35.1	35.8	32.6	33.3	33.2	34.0	34.7
	8H	34.9	35.6	35.5	36.2	36.9	33.5	34.2	34.1	34.8	35.5
	12H	36.3	36.9	36.9	37.5	38.3	34.5	35.1	35.2	35.8	36.5
12H	4H	31.7	32.5	32.3	33.1	33.8	31.1	32.0	31.8	32.6	33.2
	6H	33.9	34.6	34.6	35.2	36.0	32.9	33.6	33.6	34.2	35.0
	8H	35.2	35.8	35.9	36.5	37.2	33.9	34.5	34.6	35.2	35.9
Variations with the observer position at spacings(CIE Pub.117):											
S = 1.0H	+ 0.1 / - 0.1					+ 0.1 / - 0.1					
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.3					
2.0H	+ 0.3 / - 0.4					+ 0.2 / - 0.4					

CIE Pub.117, 2965 lm Total Lamp Luminous Flux Corrected ($8\log(F/F_0) = 3.8$)
Area: 0.019 m²

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2020-05-13

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.426
Humidity:65.0%
Test Distance:8.690m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:120.07V I:0.2105A P:25.056W PF:0.9914 Freq:59.98Hz UTHDi:0% ITHDi:0%			Lamp Flux:2964.65x1 lm		
NAME: 94020		TYPE: 26W		WEIGHT:	
SPEC.: 4000K		DIM.:		SERIAL No.: 1	
MFR.: P.Q.L., Inc.		SUR.: 0.019		Shielding Angle:	


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	49	37	29	48	36	29	46	35	29	22
0.80	58	45	37	57	44	37	54	43	36	28
1.00	66	53	44	64	52	44	61	53	43	35
1.25	73	60	51	71	59	51	67	57	49	40
1.50	78	65	57	75	64	56	71	61	54	45
2.00	85	74	65	82	72	64	77	69	62	51
2.50	89	79	71	86	77	69	81	73	67	55
3.00	93	84	76	90	81	74	84	77	71	59
4.00	98	90	83	94	87	81	88	82	77	64
5.00	101	94	88	97	91	85	91	85	81	67
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2020-05-13

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.426
Humidity: 65.0%
Test Distance: 8.690m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:120.07V I:0.2105A P:25.056W PF:0.9914 Freq:59.98Hz UTHDi:0% ITHDi:0% Lamp Flux:2964.65x1 lm		
NAME: 94020	TYPE: 26W	WEIGHT:
SPEC.: 4000K	DIM.:	SERIAL No.: 1
MFR.: P.Q.L., Inc.	SUR.: 0.019	Shielding Angle:

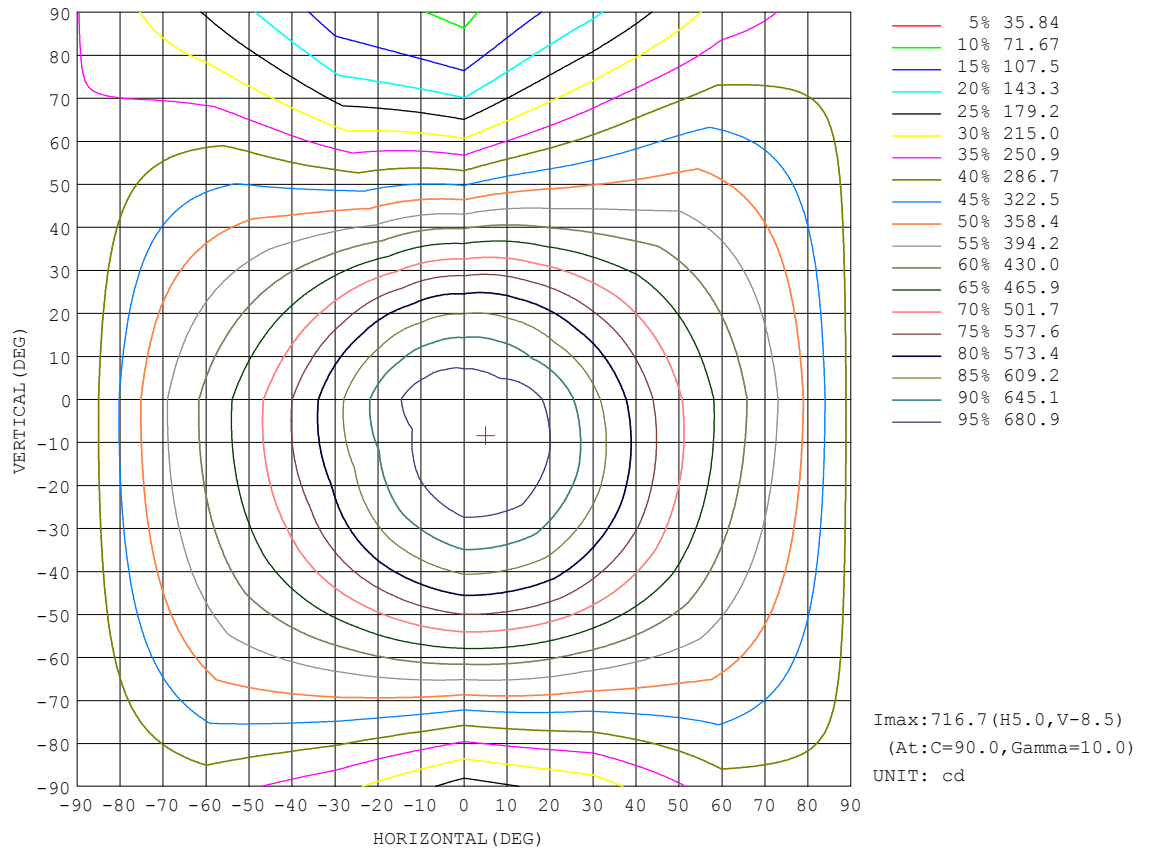


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2020-05-13

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.426
Humidity:65.0%
Test Distance:8.690m [K=1.0000]
Remarks:

AAI Figure

Test:U:120.07V I:0.2105A P:25.056W PF:0.9914 Freq:59.98Hz UTHDi:0% ITHDi:0% Lamp Flux:2964.65x1 lm		
NAME: 94020	TYPE: 26W	WEIGHT:
SPEC.: 4000K	DIM.:	SERIAL No.: 1
MFR.: P.Q.L., Inc.	SUR.: 0.019	Shielding Angle:

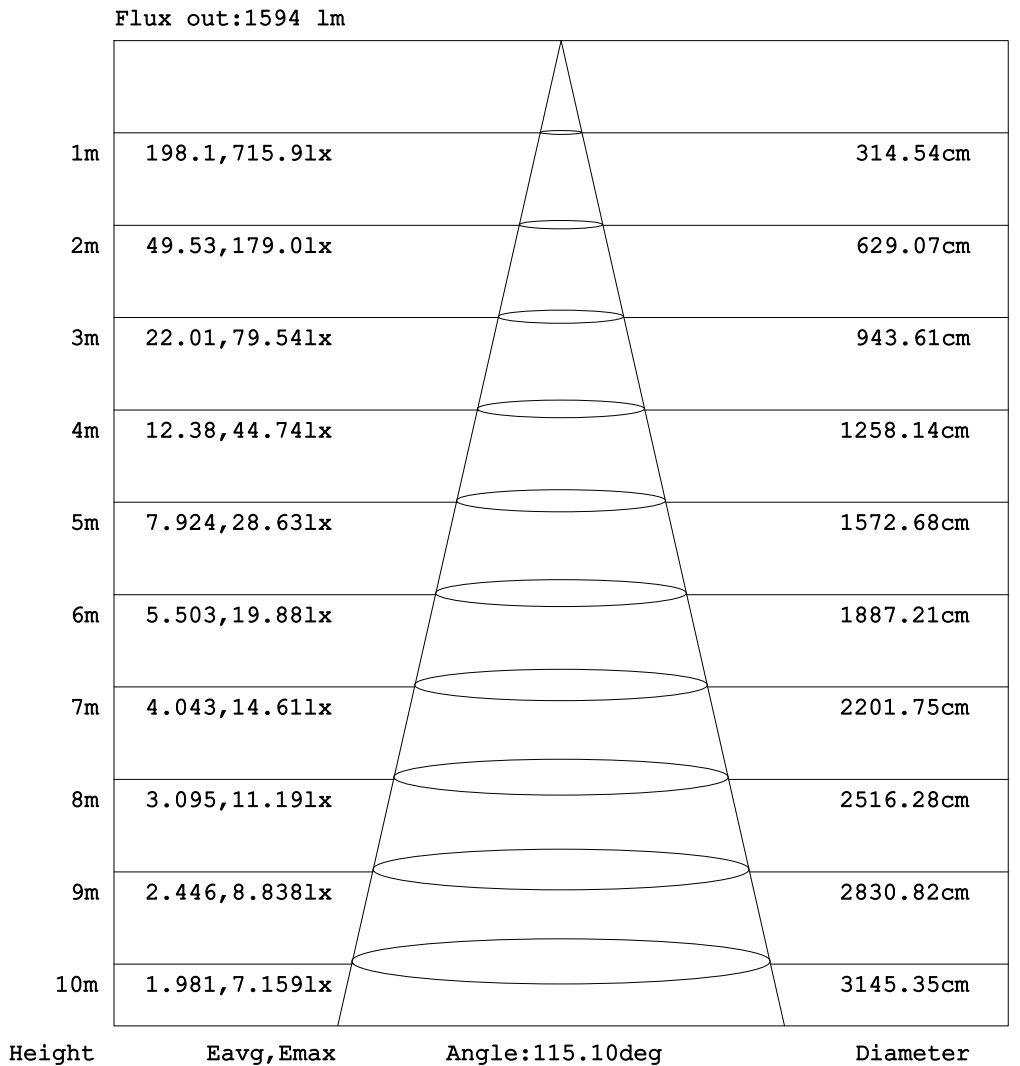


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2020-05-13

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.690m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

Test:U:120.07V I:0.2105A P:25.056W PF:0.9914 Freq:59.98Hz UTHDi:0% ITHDi:0% Lamp Flux:2964.65x1 lm		
NAME: 94020	TYPE: 26W	WEIGHT:
SPEC.: 4000K	DIM.:	SERIAL No.: 1
MFR.: P.Q.L., Inc.	SUR.: 0.019	Shielding Angle:

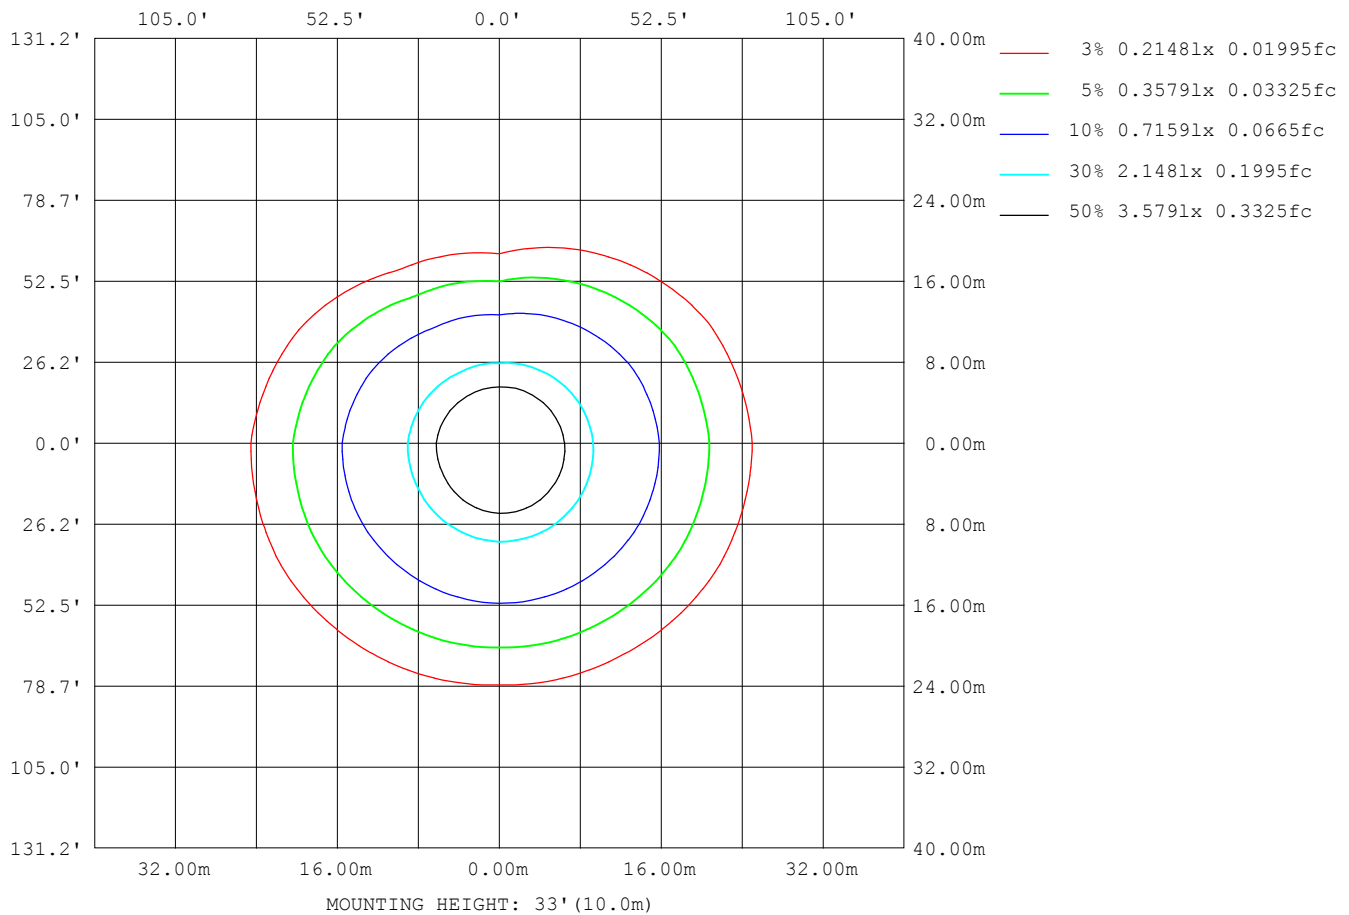

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2020-05-13

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.690m [K=1.0000]
 Remarks:

LED Avg.L Report

Test:U:120.07V I:0.2105A P:25.056W PF:0.9914 Freq:59.98Hz UTHDi:0% ITHDi:0% Lamp Flux:2964.65x1 lm		
NAME: 94020	TYPE: 26W	WEIGHT:
SPEC.: 4000K	DIM.:	SERIAL No.: 1
MFR.: P.Q.L., Inc.	SUR.: 0.019	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	52070
L_0~180 (75) av	74473
L_0~180 (85) av	179137
L_90~270 (65) av	35958
L_90~270 (75) av	41766
L_90~270 (85) av	84417
L_45 (65) av	45180
L_45 (75) av	60778
L_45 (85) av	141432

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2020-05-13

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.426
Humidity:65.0%
Test Distance:8.690m [K=1.0000]
Remarks:

Planar Illuminance Curve

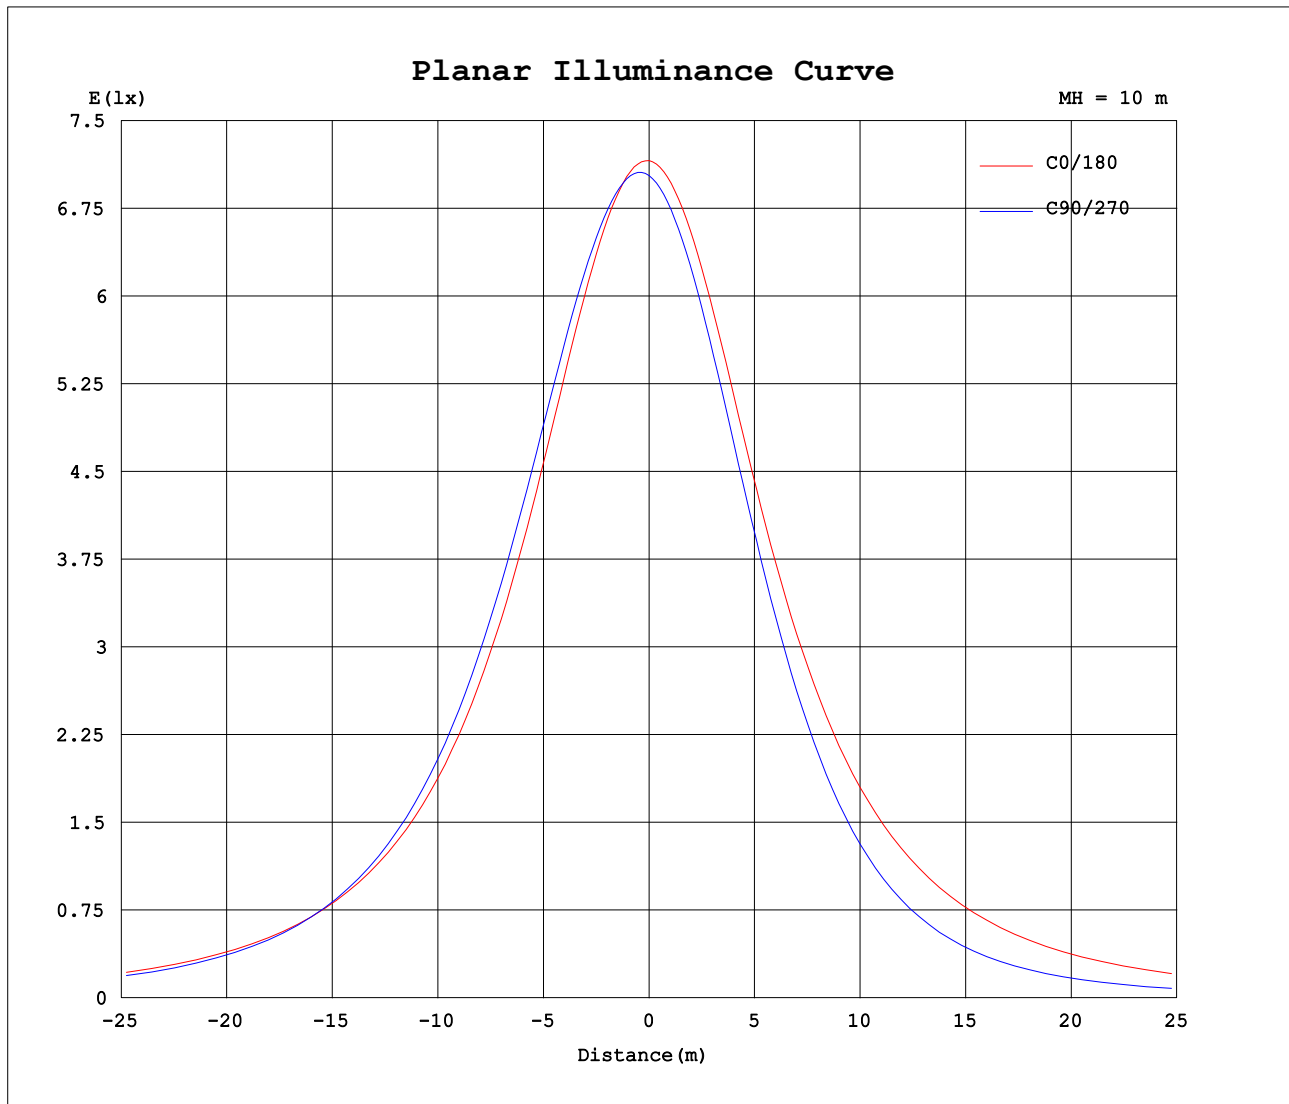

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2020-05-13

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.426
 Humidity: 65.0%
 Test Distance: 8.690m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.07V I:0.2105A P:25.056W PF:0.9914 Freq:59.98Hz UTHDi:0% ITHDi:0% Lamp Flux:2964.65x1 lm		
NAME: 94020	TYPE: 26W	WEIGHT:
SPEC.: 4000K	DIM.:	SERIAL No.: 1
MFR.: P.Q.L., Inc.	SUR.: 0.019	Shielding Angle:

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	30	60	90	120	150	180	210	240	270	300	330						
0	706	706	706	706	706	706	706	706	706	706	706	706						
5	705	711	714	714	711	705	700	694	691	691	695	700						
10	697	709	716	716	709	698	688	677	671	670	677	687						
15	683	701	713	713	702	685	670	653	644	643	653	668						
20	664	687	704	706	690	666	646	624	611	610	624	644						
25	639	669	690	692	672	642	618	590	573	571	589	615						
30	611	646	670	673	650	615	588	554	530	527	550	583						
35	581	618	645	647	622	587	558	518	485	479	508	550						
40	552	588	614	616	591	558	530	482	437	428	466	518						
45	524	557	578	580	557	531	503	449	390	374	424	488						
50	498	525	539	540	521	504	478	418	343	320	385	460						
55	474	494	497	495	484	478	454	389	299	269	348	435						
60	451	461	453	448	447	453	432	361	257	221	313	410						
65	428	429	408	398	410	427	408	333	219	180	281	386						
70	404	398	363	347	375	401	383	305	184	144	250	361						
75	378	367	320	296	339	374	354	273	155	115	221	331						
80	346	337	277	248	302	344	320	240	129	91.8	191	299						
85	311	306	236	204	266	309	283	207	108	75.2	163	265						
90	275	270	198	166	230	271	248	175	89.7	64.2	137	233						
95	242	230	162	132	194	230	214	145	72.4	57.1	114	200						
100	208	188	128	96.8	148	188	179	117	50.2	49.5	93.1	167						
105	174	147	90.0	66.2	83.9	145	144	90.9	41.2	44.6	70.5	134						
110	138	107	43.0	46.2	37.7	100	106	64.3	35.0	38.5	42.5	103						
115	99.9	68.3	15.1	32.8	29.2	51.9	65.4	37.5	25.0	34.5	23.1	74.1						
120	65.5	39.6	23.6	26.0	18.6	11.7	30.6	15.9	15.3	28.7	15.8	44.9						
125	33.8	17.7	27.8	29.5	29.1	14.4	13.6	14.6	12.0	22.4	16.8	27.7						
130	17.6	10.8	22.7	31.1	21.2	13.1	14.5	11.6	19.5	17.5	20.9	12.5						
135	9.37	8.75	17.5	23.4	13.4	7.89	8.45	6.99	16.1	15.0	14.6	7.39						
140	8.90	10.00	17.2	17.7	10.8	7.73	7.76	7.16	11.4	12.7	8.60	9.73						
145	12.2	12.4	10.5	13.7	7.21	13.1	10.7	7.36	10.3	7.59	8.84	9.90						
150	8.92	7.17	4.90	4.82	11.7	13.1	11.4	6.54	9.81	9.07	7.82	8.42						
155	6.19	8.10	5.29	5.12	7.54	6.55	7.45	7.70	6.08	7.64	6.04	6.00						
160	9.90	6.44	10.1	6.07	7.92	9.92	8.16	8.73	6.31	6.27	6.30	8.06						
165	6.46	6.19	10.8	9.30	6.69	6.17	6.58	6.38	7.32	6.47	9.39	6.28						
170	7.56	6.65	9.23	11.1	7.92	6.45	7.40	6.96	7.88	6.69	8.70	6.88						
175	7.99	8.37	12.3	8.77	6.61	9.34	8.68	7.49	7.13	7.42	7.51	7.32						
180	10.5	10.5	9.48	9.40	9.85	10.3	10.5	10.4	9.47	9.33	9.80	10.3						

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2020-05-13

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.426
Humidity:65.0%
Test Distance:8.690m [K=1.0000]
Remarks: