


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:120.10V I:0.2182A P:26.014W PF:0.9927 Freq:59.98Hz UTHDi:0% ITHDi:0% Lamp Flux:2478.88x1 lm		
NAME: 94021	TYPE: 26W	WEIGHT:
SPEC.: 5000K	DIM.:	SERIAL No.: 1
MFR.: P.Q.L., Inc.	SUR.: 0.019	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 95.29 lm/W			
MODEL	LTS-26W-PS-3CCT-B	I _{max} (cd)	587.4	S/MH (C0/180)	1.26
NOMINAL POWER(W)	26	LOR(%)	100.0	S/MH (C90/270)	1.30
RATED VOLTAGE(V)	120	TOTAL FLUX(lm)	2478.9	η UP,DN(C0-180)	6.0,42.6
NOMINAL FLUX(lm)	2478.88	CIE CLASS	SEMI-D.	η UP,DN(C180-360)	6.3,45.1
LAMPS INSIDE	1	η up (%)	12.2	CIBSE SHR NOM	1.50
TEST VOLTAGE(V)	120	η down (%)	87.8	CIBSE SHR MAX	1.50

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

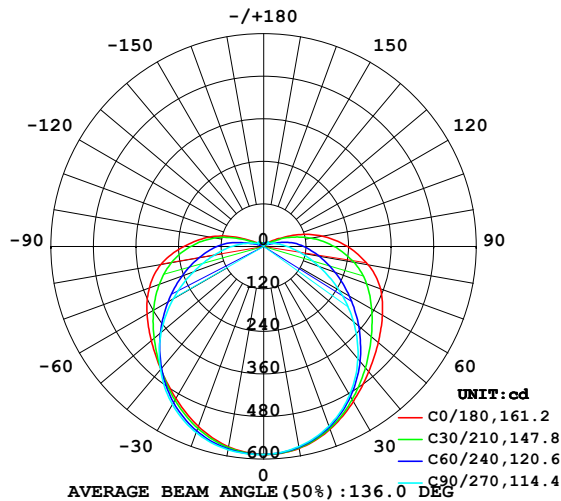

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

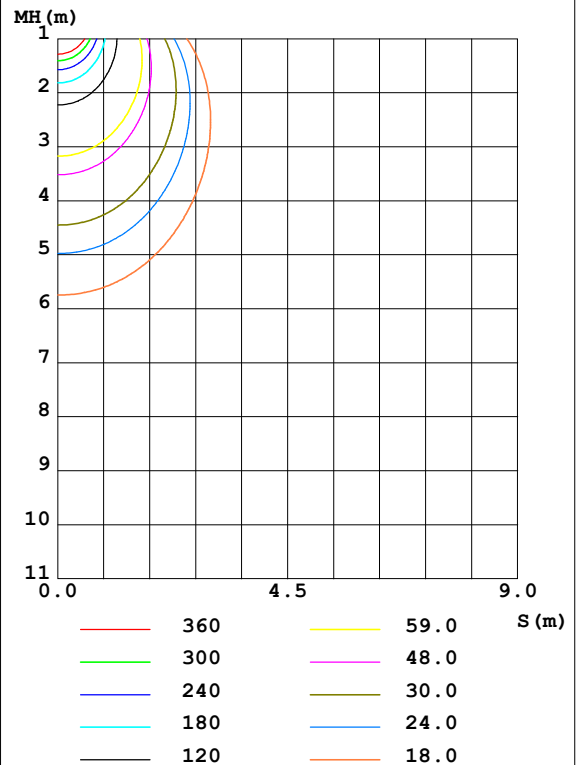

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2020-05-12

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.426
Humidity: 65.0%
Test Distance: 8.690m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	578.3	576.0	573.2	571.7	573.5	577.8	582.2	581.7	0- 10	55.53	55.53	2.24,2.24
20	548.6	544.1	538.7	536.5	540.0	549.7	558.5	557.0	10- 20	159.2	214.8	8.66,8.66
30	505.5	494.4	484.5	486.4	495.4	504.8	515.1	515.0	20- 30	242.1	456.8	18.4,18.4
40	461.3	434.8	413.7	430.9	451.9	449.8	453.3	463.1	30- 40	296.4	753.2	30.4,30.4
50	421.9	373.2	331.2	376.5	413.9	392.1	378.1	409.1	40- 50	321.6	1075	43.4,43.4
60	386.9	315.5	244.8	326.6	380.1	335.1	294.3	357.1	50- 60	321.7	1396	56.3,56.3
70	350.9	262.0	166.9	278.3	343.7	279.8	211.2	306.8	60- 70	301.6	1698	68.5,68.5
80	299.4	208.8	106.8	226.8	294.9	225.0	141.6	254.9	70- 80	264.7	1963	79.2,79.2
90	236.6	156.4	66.60	169.0	224.9	169.2	89.82	199.3	80- 90	212.5	2175	87.8,87.8
100	169.1	102.9	43.25	103.5	155.7	102.2	51.60	139.8	90-100	152.3	2328	93.9,93.9
110	96.20	50.00	28.59	45.36	72.93	34.98	27.11	67.06	100-110	84.42	2412	97.3,97.3
120	41.76	20.24	17.90	9.632	19.53	13.48	16.94	22.24	110-120	31.71	2444	98.6,98.6
130	16.42	12.40	16.85	11.81	15.68	10.52	18.91	11.28	120-130	14.15	2458	99.2,99.2
140	16.27	12.23	14.70	9.607	11.87	10.64	6.358	12.03	130-140	9.067	2467	99.5,99.5
150	12.31	5.509	9.416	6.242	11.12	5.949	4.214	5.840	140-150	6.582	2474	99.8,99.8
160	8.706	5.652	5.063	6.473	8.759	6.822	4.699	6.489	150-160	2.874	2476	99.9,99.9
170	5.384	6.430	5.338	5.343	5.384	5.470	7.603	5.715	160-170	1.767	2478	100,100
180	11.12	10.12	6.220	9.053	11.17	10.13	6.208	9.100	170-180	0.6144	2479	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2020-05-12

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.426
Humidity:65.0%
Test Distance:8.690m [K=1.0000]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:120.10V I:0.2182A P:26.014W PF:0.9927 Freq:59.98Hz UTHDi:0% ITHDi:0%			Lamp Flux:2478.88x1 lm		
NAME: 94021		TYPE: 26W		WEIGHT:	
SPEC.: 5000K		DIM.:		SERIAL No.: 1	
MFR.: P.Q.L., Inc.		SUR.: 0.019		Shielding Angle:	

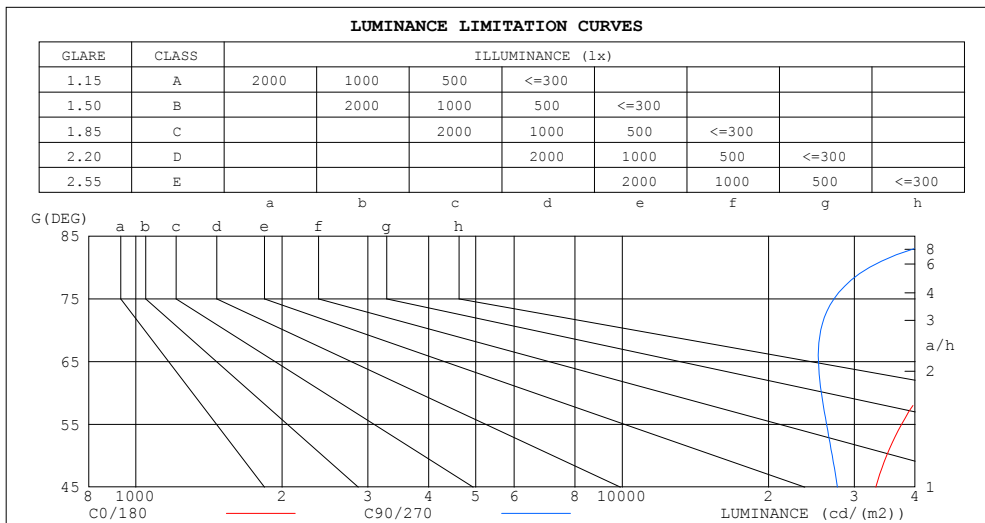

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	163558	50581
80	91871	32266
75	67436	27267
70	54675	25600
65	46640	25327
60	41236	25682
55	37543	26317
50	34982	27026
45	33238	27712


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2020-05-12

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.426
Humidity:65.0%
Test Distance:8.690m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:120.10V I:0.2182A P:26.014W PF:0.9927 Freq:59.98Hz UTHDi:0% ITHDi:0% Lamp Flux:2478.88x1 lm		
NAME: 94021	TYPE: 26W	WEIGHT:
SPEC.: 5000K	DIM.:	SERIAL No.: 1
MFR.: P.Q.L., Inc.	SUR.: 0.019	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio			Coefficients of Utilization(CU)												
0.0	1.16	1.16	1.16	1.12	1.12	1.12	1.04	1.04	1.04	.97	.97	.97	.91	.91	.91	.88
1.0	.96	.91	.85	.93	.88	.83	.86	.82	.78	.80	.76	.73	.74	.72	.69	.66
2.0	.82	.74	.67	.79	.72	.65	.73	.67	.62	.68	.63	.59	.63	.59	.55	.52
3.0	.71	.62	.54	.68	.60	.53	.64	.56	.50	.59	.53	.48	.55	.50	.46	.43
4.0	.62	.53	.45	.60	.51	.44	.56	.48	.42	.52	.46	.40	.49	.43	.39	.36
5.0	.55	.46	.38	.53	.44	.38	.50	.42	.36	.47	.40	.35	.43	.38	.33	.30
6.0	.50	.40	.33	.48	.39	.33	.45	.37	.31	.42	.35	.30	.39	.33	.29	.26
7.0	.45	.36	.29	.43	.35	.29	.41	.33	.27	.38	.31	.26	.36	.30	.25	.23
8.0	.41	.32	.26	.39	.31	.25	.37	.30	.24	.35	.28	.24	.33	.27	.23	.20
9.0	.37	.29	.23	.36	.28	.23	.34	.27	.22	.32	.26	.21	.30	.25	.20	.18
10.0	.34	.26	.21	.33	.26	.20	.31	.25	.20	.30	.23	.19	.28	.22	.18	.17

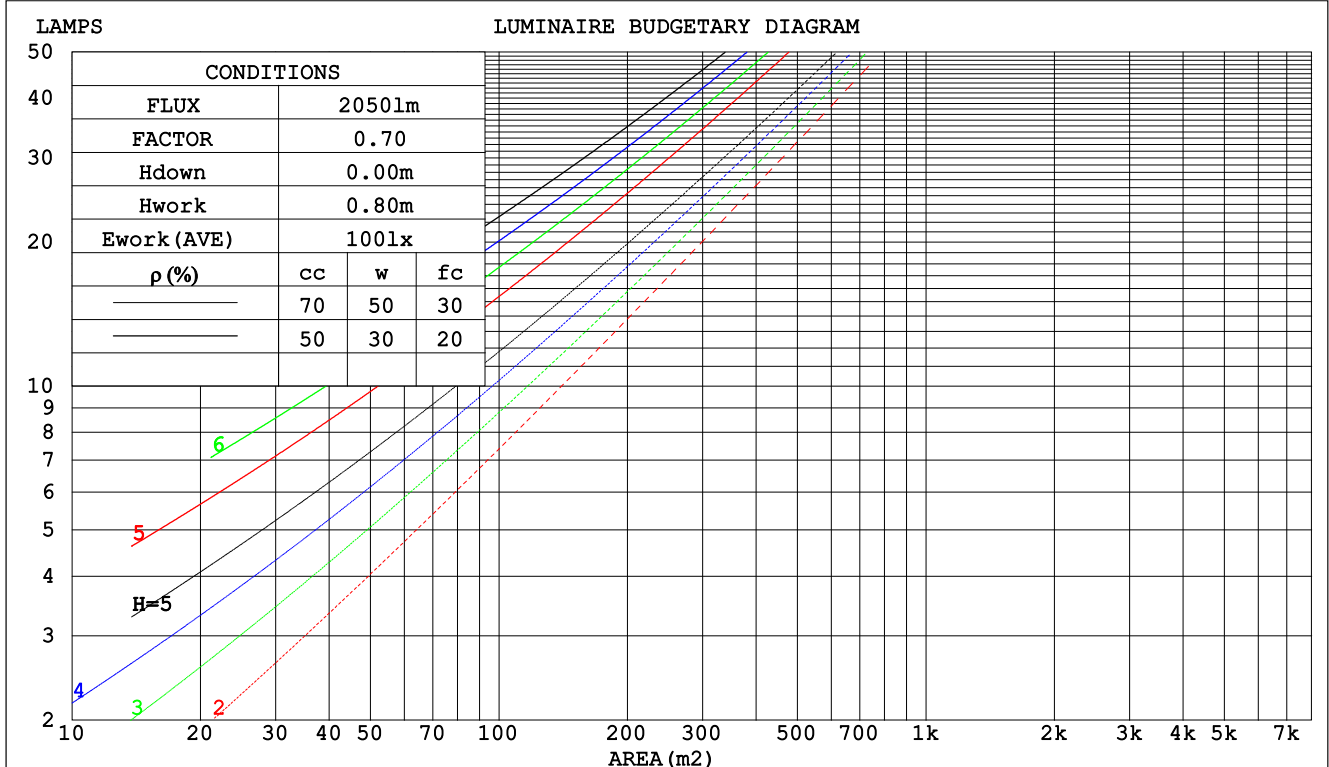

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2020-05-12

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.690m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:120.10V I:0.2182A P:26.014W PF:0.9927 Freq:59.98Hz UTHDi:0% ITHDi:0% Lamp Flux:2478.88x1 lm		
NAME: 94021	TYPE: 26W	WEIGHT:
SPEC.: 5000K	DIM.:	SERIAL No.: 1
MFR.: P.Q.L., Inc.	SUR.: 0.019	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0		
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0		
pfc	20%			20%			20%			20%			20%			0		
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)											
0.0																		
1.0	.402	.229	.072	.391	.223	.071	.370	.213	.068	.351	.203	.065	.334	.194	.062			
2.0	.345	.189	.058	.335	.184	.057	.316	.176	.055	.299	.168	.053	.283	.160	.050			
3.0	.304	.162	.049	.296	.158	.048	.279	.151	.046	.263	.144	.044	.249	.138	.043			
4.0	.273	.142	.042	.265	.139	.041	.250	.132	.040	.236	.127	.038	.223	.121	.037			
5.0	.247	.126	.037	.240	.123	.036	.226	.118	.035	.214	.113	.034	.202	.108	.032			
6.0	.226	.113	.032	.220	.111	.032	.207	.106	.031	.196	.102	.030	.185	.097	.029			
7.0	.208	.103	.029	.202	.101	.029	.191	.097	.028	.180	.093	.027	.171	.089	.026			
8.0	.193	.094	.026	.187	.092	.026	.177	.089	.025	.168	.085	.024	.158	.081	.024			
9.0	.180	.087	.024	.175	.085	.024	.165	.082	.023	.156	.078	.022	.148	.075	.022			
10.0	.168	.080	.022	.163	.079	.022	.155	.076	.021	.147	.073	.021	.139	.070	.020			

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.284	.284	.284	.243	.243	.243	.166	.166	.166	.095	.095	.095	.030	.030	.030	
1.0	.281	.249	.221	.240	.214	.190	.164	.147	.132	.095	.085	.077	.030	.027	.025	
2.0	.274	.226	.186	.235	.195	.161	.161	.135	.112	.093	.078	.066	.030	.025	.021	
3.0	.266	.210	.165	.228	.181	.143	.157	.126	.100	.091	.073	.059	.029	.024	.019	
4.0	.258	.197	.150	.222	.170	.131	.152	.119	.092	.088	.070	.054	.028	.023	.018	
5.0	.250	.187	.141	.215	.162	.122	.148	.113	.086	.086	.066	.051	.028	.022	.017	
6.0	.243	.179	.134	.209	.155	.116	.144	.109	.082	.084	.064	.049	.027	.021	.016	
7.0	.235	.173	.128	.203	.150	.112	.140	.105	.079	.081	.062	.047	.026	.020	.016	
8.0	.229	.167	.124	.197	.145	.109	.136	.102	.077	.079	.060	.046	.026	.020	.015	
9.0	.222	.162	.121	.191	.141	.106	.133	.099	.075	.077	.058	.045	.025	.019	.015	
10.0	.216	.158	.119	.186	.137	.104	.129	.096	.074	.075	.057	.044	.024	.019	.015	

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2020-05-12

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.426
Humidity:65.0%
Test Distance:8.690m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:120.10V I:0.2182A P:26.014W PF:0.9927 Freq:59.98Hz UTHDi:0% ITHDi:0%						Lamp Flux:2478.88x1 lm					
NAME: 94021				TYPE: 26W			WEIGHT:				
SPEC.: 5000K				DIM.:			SERIAL No.: 1				
MFR.: P.Q.L., Inc.				SUR.: 0.019			Shielding Angle:				
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions	Viewed crosswise					Viewed endwise					
x = 2H y = 2H	24.8	26.3	25.3	26.7	27.2	23.0	24.4	23.4	24.8	25.3	
	3H	27.6	29.0	28.1	29.5	30.0	24.7	26.0	25.2	26.5	27.0
	4H	29.2	30.5	29.7	31.0	31.5	25.5	26.8	26.0	27.3	27.8
	6H	30.9	32.1	31.4	32.6	33.1	26.4	27.6	26.9	28.1	28.7
	8H	31.8	33.0	32.3	33.5	34.0	26.8	28.0	27.4	28.5	29.1
	12H	32.8	34.0	33.3	34.5	35.0	27.3	28.5	27.9	29.0	29.6
4H	2H	25.4	26.7	25.9	27.2	27.7	24.0	25.3	24.5	25.8	26.3
	3H	28.5	29.6	29.0	30.1	30.7	26.0	27.1	26.5	27.6	28.2
	4H	30.2	31.3	30.8	31.8	32.4	27.0	28.1	27.6	28.6	29.2
	6H	32.1	33.1	32.7	33.6	34.3	28.0	29.0	28.6	29.6	30.2
	8H	33.1	34.0	33.7	34.6	35.3	28.6	29.5	29.2	30.0	30.7
	12H	34.3	35.1	34.9	35.7	36.4	29.2	30.0	29.8	30.6	31.3
8H	4H	30.6	31.5	31.2	32.1	32.7	28.0	28.9	28.6	29.5	30.1
	6H	32.8	33.5	33.4	34.1	34.8	29.3	30.1	29.9	30.7	31.4
	8H	34.0	34.7	34.7	35.3	36.0	30.0	30.7	30.7	31.3	32.0
	12H	35.4	36.0	36.1	36.7	37.4	30.8	31.4	31.5	32.0	32.8
12H	4H	30.6	31.4	31.2	32.0	32.7	28.3	29.2	28.9	29.8	30.4
	6H	32.9	33.6	33.5	34.2	34.9	29.8	30.5	30.5	31.1	31.9
	8H	34.2	34.9	34.9	35.5	36.2	30.7	31.3	31.3	31.9	32.7
Variations with the observer position at spacings(CIE Pub.117):											
S = 1.0H	+ 0.1 / - 0.1					+ 0.1 / - 0.1					
1.5H	+ 0.2 / - 0.2					+ 0.2 / - 0.3					
2.0H	+ 0.2 / - 0.3					+ 0.2 / - 0.4					

CIE Pub.117, 2479 lm Total Lamp Luminous Flux Corrected ($8\log(F/F_0) = 3.2$)
Area: 0.019 m²

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2020-05-12

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.426
Humidity:65.0%
Test Distance:8.690m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:120.10V I:0.2182A P:26.014W PF:0.9927 Freq:59.98Hz UTHDi:0% ITHDi:0%			Lamp Flux:2478.88x1 lm		
NAME: 94021		TYPE: 26W		WEIGHT:	
SPEC.: 5000K		DIM.:		SERIAL No.: 1	
MFR.: P.Q.L., Inc.		SUR.: 0.019		Shielding Angle:	


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	49	37	29	48	36	29	46	35	29	22
0.80	58	45	37	57	44	37	54	43	36	28
1.00	66	53	44	64	52	44	61	53	43	35
1.25	73	60	51	71	59	51	67	57	49	40
1.50	78	65	57	75	64	56	71	61	54	45
2.00	85	74	65	82	72	64	77	69	62	51
2.50	89	79	71	86	77	69	81	73	67	55
3.00	93	84	76	90	81	74	84	77	71	59
4.00	98	90	83	94	87	81	88	82	77	64
5.00	101	94	88	97	91	85	91	86	81	68
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2020-05-12

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.426
Humidity:65.0%
Test Distance:8.690m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:120.10V I:0.2182A P:26.014W PF:0.9927 Freq:59.98Hz UTHDi:0% ITHDi:0% Lamp Flux:2478.88x1 lm		
NAME: 94021	TYPE: 26W	WEIGHT:
SPEC.: 5000K	DIM.:	SERIAL No.: 1
MFR.: P.Q.L., Inc.	SUR.: 0.019	Shielding Angle:

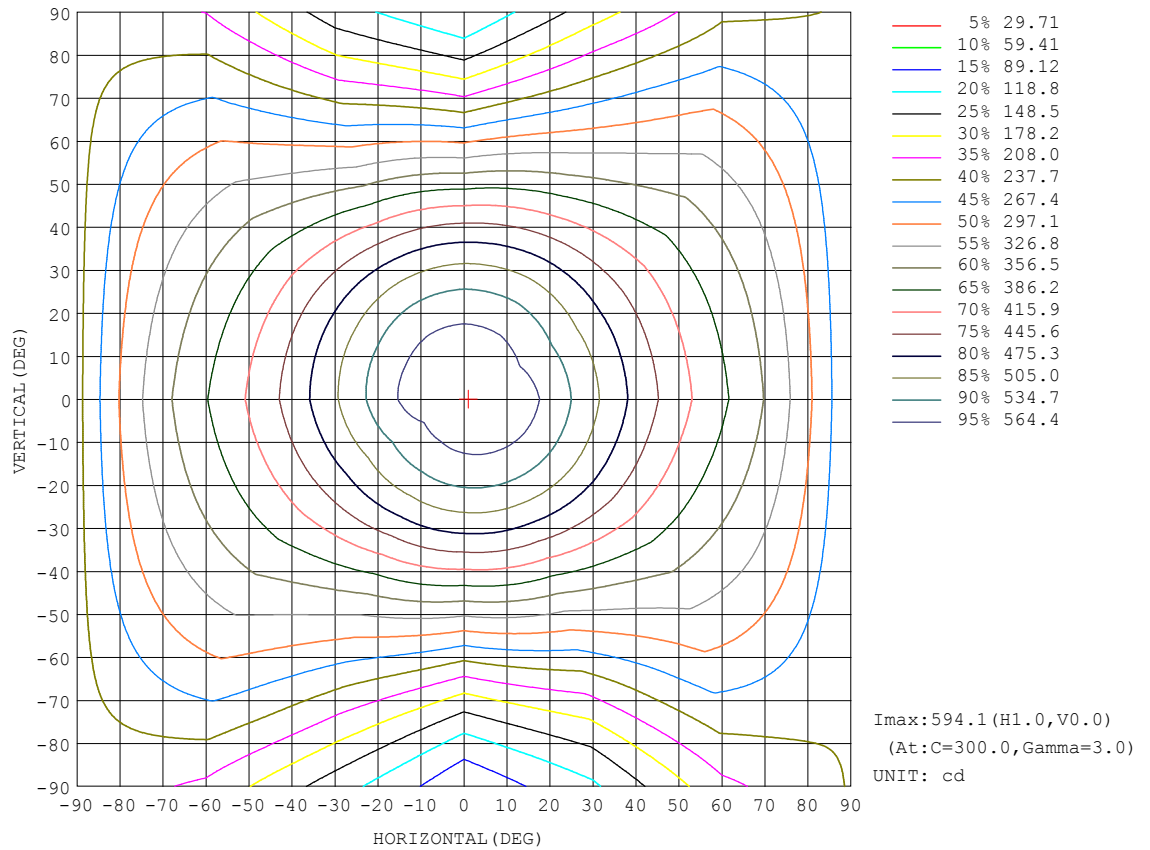


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2020-05-12

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.426
Humidity:65.0%
Test Distance:8.690m [K=1.0000]
Remarks:

AAI Figure

Test:U:120.10V I:0.2182A P:26.014W PF:0.9927 Freq:59.98Hz UTHDi:0% ITHDi:0% Lamp Flux:2478.88x1 lm		
NAME: 94021	TYPE: 26W	WEIGHT:
SPEC.: 5000K	DIM.:	SERIAL No.: 1
MFR.: P.Q.L., Inc.	SUR.: 0.019	Shielding Angle:

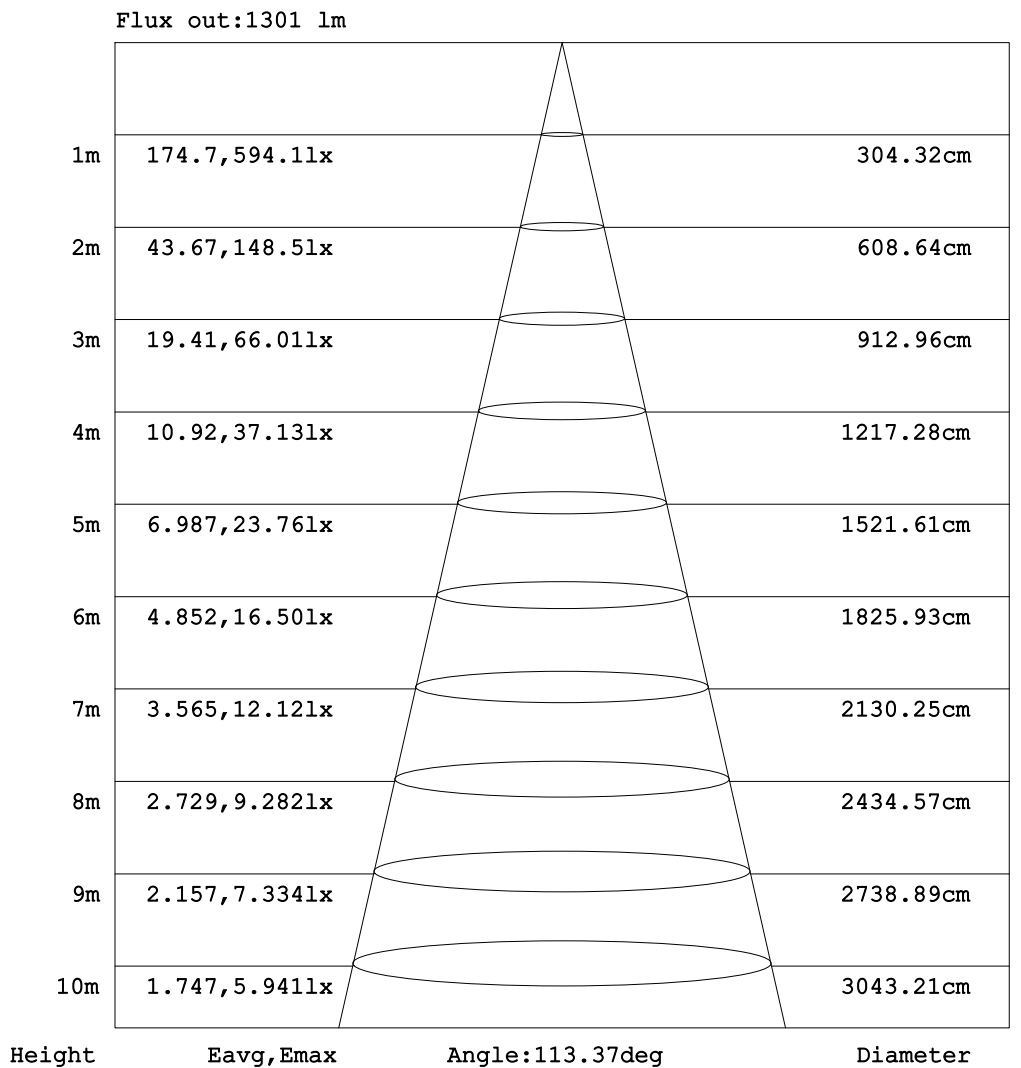


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2020-05-12

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.690m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

Test:U:120.10V I:0.2182A P:26.014W PF:0.9927 Freq:59.98Hz UTHDi:0% ITHDi:0% Lamp Flux:2478.88x1 lm		
NAME: 94021	TYPE: 26W	WEIGHT:
SPEC.: 5000K	DIM.:	SERIAL No.: 1
MFR.: P.Q.L., Inc.	SUR.: 0.019	Shielding Angle:

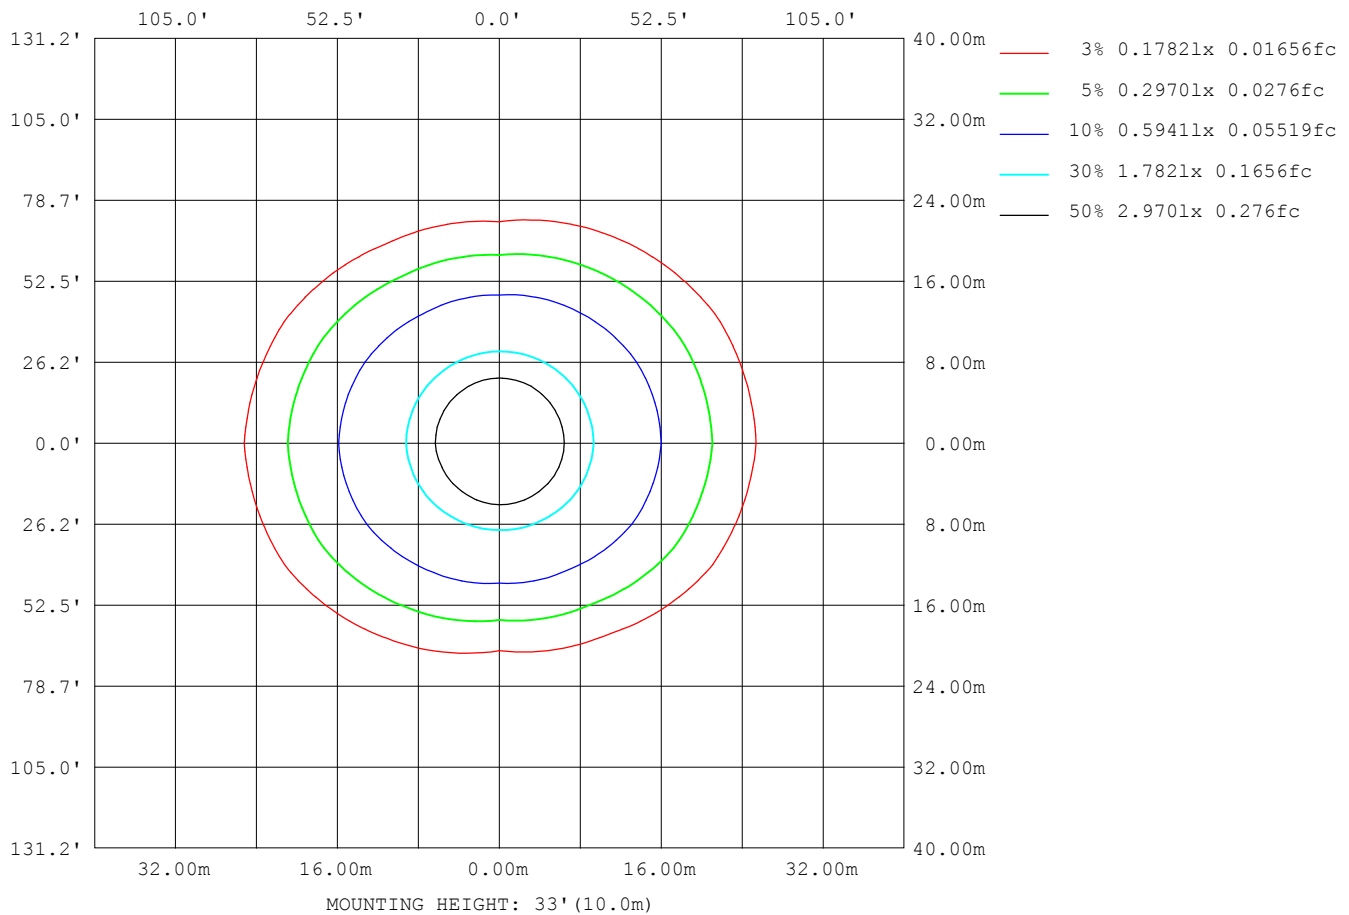

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2020-05-12

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.690m [K=1.0000]
 Remarks:

LED Avg.L Report

Test:U:120.10V I:0.2182A P:26.014W PF:0.9927 Freq:59.98Hz UTHDi:0% ITHDi:0% Lamp Flux:2478.88x1 lm		
NAME: 94021	TYPE: 26W	WEIGHT:
SPEC.: 5000K	DIM.:	SERIAL No.: 1
MFR.: P.Q.L., Inc.	SUR.: 0.019	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	45649
L_0~180 (75) av	66002
L_0~180 (85) av	159738
L_90~270 (65) av	28385
L_90~270 (75) av	31419
L_90~270 (85) av	59597
L_45 (65) av	38451
L_45 (75) av	52429
L_45 (85) av	122846

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2020-05-12

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.426
Humidity:65.0%
Test Distance:8.690m [K=1.0000]
Remarks:

Planar Illuminance Curve

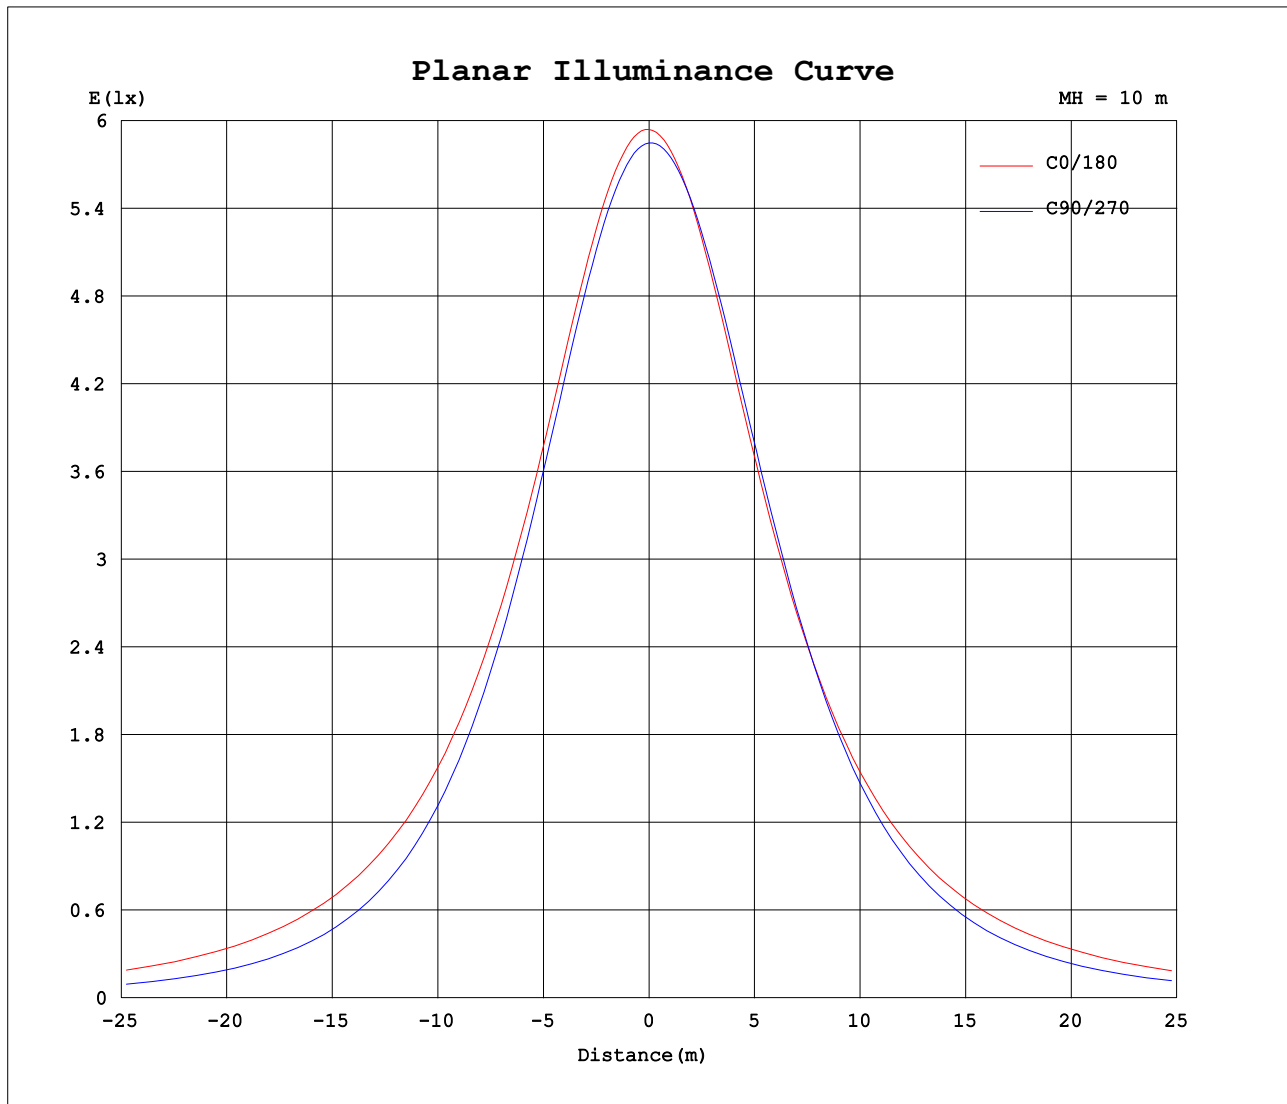

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2020-05-12

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.426
 Humidity: 65.0%
 Test Distance: 8.690m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.10V I:0.2182A P:26.014W PF:0.9927 Freq:59.98Hz UTHDi:0% ITHDi:0% Lamp Flux:2478.88x1 lm		
NAME: 94021	TYPE: 26W	WEIGHT:
SPEC.: 5000K	DIM.:	SERIAL No.: 1
MFR.: P.Q.L., Inc.	SUR.: 0.019	Shielding Angle:

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	30	60	90	120	150	180	210	240	270	300	330							
0	587	587	587	587	587	587	587	587	587	587	587	587							
5	585	584	583	583	582	582	583	584	585	587	587	586							
10	578	577	575	573	572	572	574	576	580	582	583	581							
15	566	564	561	558	556	557	559	563	569	573	574	570							
20	549	546	542	539	536	537	540	546	554	558	559	555							
25	528	524	518	514	511	514	518	524	533	539	540	535							
30	506	499	490	485	483	490	495	501	509	515	517	513							
35	483	473	458	451	452	465	473	476	480	486	490	489							
40	461	447	423	414	420	442	452	451	448	453	460	466							
45	441	421	387	374	387	419	432	427	415	417	429	443							
50	422	396	350	331	355	398	414	403	381	378	397	421							
55	404	374	314	288	324	379	397	381	346	337	365	400							
60	387	352	279	245	294	359	380	359	311	294	334	380							
65	370	331	246	204	265	340	363	337	278	252	304	360							
70	351	309	215	167	238	319	344	314	246	211	275	339							
75	328	286	186	135	211	296	322	290	215	174	247	316							
80	299	259	159	107	185	269	295	265	185	142	220	290							
85	267	229	135	84.0	159	237	262	237	158	113	193	262							
90	237	199	114	66.6	134	204	225	206	132	89.8	165	233							
95	203	169	93.5	53.1	108	171	191	175	104	69.5	138	205							
100	169	136	69.4	43.3	71.9	135	156	140	63.7	51.6	106	174							
105	133	104	42.1	34.3	42.8	98.4	115	99.3	32.2	36.9	67.9	140							
110	96.2	76.0	23.8	28.6	27.4	63.4	72.9	55.7	14.1	27.1	30.3	104							
115	61.4	49.0	15.4	22.9	14.9	30.6	38.0	23.9	8.33	20.4	9.71	66.0							
120	41.8	28.4	12.1	17.9	10.4	8.88	19.5	11.8	15.2	16.9	17.5	27.0							
125	26.5	13.0	13.8	14.4	16.2	13.7	15.8	7.34	16.5	19.2	18.0	9.38							
130	16.4	7.84	17.0	16.9	17.4	6.23	15.7	6.44	14.6	18.9	14.2	8.31							
135	14.2	9.58	13.8	19.4	12.3	8.02	9.14	7.50	7.47	14.1	7.86	11.3							
140	16.3	10.0	14.4	14.7	11.2	7.99	11.9	10.1	11.2	6.36	9.14	14.9							
145	13.6	9.64	9.93	10.3	10.2	8.86	13.6	14.1	8.58	8.30	8.95	17.7							
150	12.3	4.98	6.04	9.42	5.87	6.61	11.1	7.39	4.51	4.21	6.05	5.63							
155	4.89	11.5	5.19	5.32	4.72	5.17	5.28	7.11	4.54	4.35	4.60	9.50							
160	8.71	5.12	6.18	5.06	4.94	8.01	8.76	6.54	7.10	4.70	7.86	5.12							
165	5.18	5.35	8.93	5.66	9.12	5.24	5.19	5.06	7.65	6.57	7.32	5.10							
170	5.38	5.62	7.25	5.34	5.29	5.40	5.38	5.21	5.73	7.60	6.06	5.36							
175	5.72	5.91	7.09	5.53	5.40	6.20	7.03	8.23	5.45	6.78	11.5	5.64							
180	11.1	11.2	9.07	6.22	7.53	10.6	11.2	11.1	9.11	6.21	7.56	10.6							

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2020-05-12

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.426
Humidity:65.0%
Test Distance:8.690m [K=1.0000]
Remarks: