

ARROWAY™

Low Profile Linear High Bay

Client: _____ Order #: _____
 Project Name: _____ Type: _____ Qty: _____

Performance Data

CRI

81

CCT

3500K, 4000K, 5000K

Projected Lifetime

>50,000 Hours

Dimming



0-10V Dimming Standard

Operating Temperature

-30°C to +52°C Ambient (-22°F to +125°F)

UL Listed

UL, Suitable for dry and damp locations

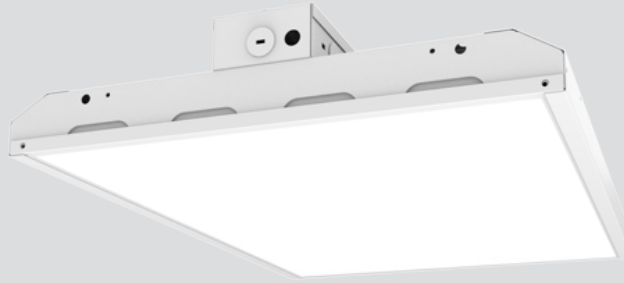

Description

The Arroway™ is an innovative interior high bay lighting luminaire that delivers top-end performance packaged into a sleek form factor. This low-profile linear high bay/low bay luminaire offers commercial and industrial building owners an all-in-one solution for illuminating their facility while drastically reducing energy consumption to aid their bottom line. The Arroway™ high bay luminaire features top-quality construction, a range of lumen packages, and various control options that make it a versatile solution for commercial and industrial building owners looking to upgrade to next-generation LED technology. Delivers up to 151lm/W.

Features

Optical System

- Reflector systems features highly reflective coating, delivering adequate light for high ceiling applications.
- Diffuser lens reduces glare and improves occupant working conditions while maintaining high efficiencies.

Construction

- Rugged and durable construction withstands warehouse environments with an IP54 rating. Luminaire features durable, matte white finish.
- For more features see page 2

Ordering Information

FIXTURE SERIES

Low Profile Linear High Bay

CCT

354050 3500K-4000K-5000K

WARRANTY¹

- 5 Year Warranty

SIZE

4 4'

VOLTAGE

H 277-480V

10 10 Year Warranty

10L 10 Year Warranty including labor

LENS

F Frosted

WATTAGE/LUMENS

#55579	
220W	33000
260W	39000
300W	45360

OPTIONS

#55696	Emergency
#54871	PIR Sensor
#54872	Microwave Sensor
#54876	Quick Connect



Qualification Model #:

55579-[Blank,30WEM]-[Blank,MS,BT]

¹5 year standard unless specified

Features (continues)

Installation / Mounting

- Various mounting options available, including suspension, pendant, and surface mount. V-hook hangers and 41' chain accessories included.

Electrical

- Luminaire utilizes high-efficacy LED packages running at low operating temperatures for extended fixture lifetime.
- Comes equipped with luminaire quick-disconnect.

Controls / Dimming

- Continuous dimming (0-10V) comes standard.
- Suitable for use with dimmers, sensors, daylight harvesting and other control strategies to achieve deeper energy-savings and code compliance.

Certifications

- UL Listed, suitable for Dry and Damp locations
- UL Class 2 Driver: SCP, OTP, OVP protection, FCC Part 15 Class B, UL8750 Class 2.

Dimensions

	Inches
	260W Version
X₁	12.69
X₂	3.69
X₃	45.87

REPLACEMENT DRIVER

55579

SDH160CS150X2V4

