

STEALTH™ AREA LIGHT - 100-277V

INSTALLATION INSTRUCTIONS

PLEASE USE A QUALIFIED ELECTRICIAN FOR INSTALLATION. Read the instructions before installing or use of the luminaire.

WARNING, CAUTIONS AND OPERATING INSTRUCTIONS

- To reduce the risk of death, personal injury or property damage from fire, electric shock, falling parts, cuts/abrasions, and other hazards read all warnings and instructions included with and on the fixture box and all fixture labels.
- Before installing, servicing, or performing routine maintenance upon this equipment, follow these general precautions.
- Commercial installation, service and maintenance of luminaires should be performed by a qualified licensed electrician.
- For The installation: If you are unsure about the installation or maintenance of the luminaires, consult a qualified licensed electrician and check your local electrical code.
- To prevent wiring damage or abrasion, do not expose wiring to edges of sheet metal or other sharp objects.
- Do not make or alter any open holes in an enclosure of wiring or electrical components during kit installation.
- Do not cover any part of the fixture; this can cause overheating.

WARNING: RISK OF FIRE OR ELECTRICAL SHOCK

- Turn off electrical power at fuse or circuit breaker box before wiring fixture to the power supply.
- Turn off the power when you perform any maintenance.
- Verify that supply voltage is correct by comparing it with the luminaire label information.
- Make all electrical and grounded connections in accordance with the National Electrical Code and any applicable local code requirements.
- All wiring connections should be capped with UL approved wire connectors.

CAUTION: RISK OF INJURY


- Avoid direct eye exposure to the light source while it is on.
- Account for small parts and destroy packing material, as these may be hazardous to children.
- Suitable for Wet locations.

SPEC-SELECT™ - FIELD ADJUSTABLE WATTAGE & CCT




WARNING DISCONNECT POWER BEFORE INSTALLING OR SERVICING.

1. Use a flathead screwdriver to remove the plug.

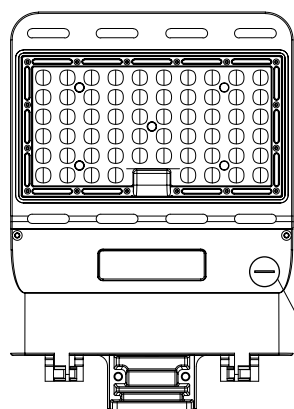


Plug

2. Use the slide switch to select your preferred wattage and CCT.

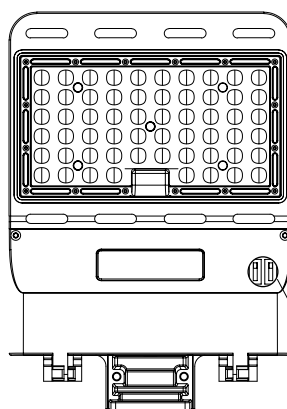

Slide Switches

3. Replace the plug making sure it is fully sealed.

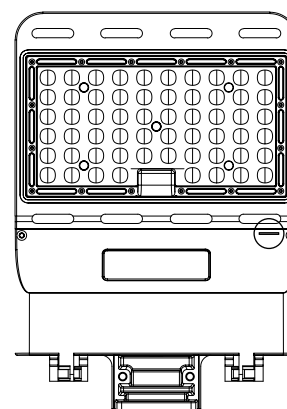

WATTAGE	High	Mid	Low
Chassis A	100W	80W	100W
Chassis B	185W	150W	100W
Chassis C	300W	240W	185W

CCT	A	A+B	B
	3000K	4000K	5000K

STEALTH™ AREA LIGHT - 100-277V

INSTALLATION INSTRUCTIONS

PQL
PREMIUM QUALITY LIGHTING®


INSTALLATION




**WARNING DISCONNECT POWER
BEFORE INSTALLING OR SERVICING.**

Product requires top-mounted shorting cap or optional twist-lock photocell installed to operate.


TRUNNION MOUNTING (POLE)

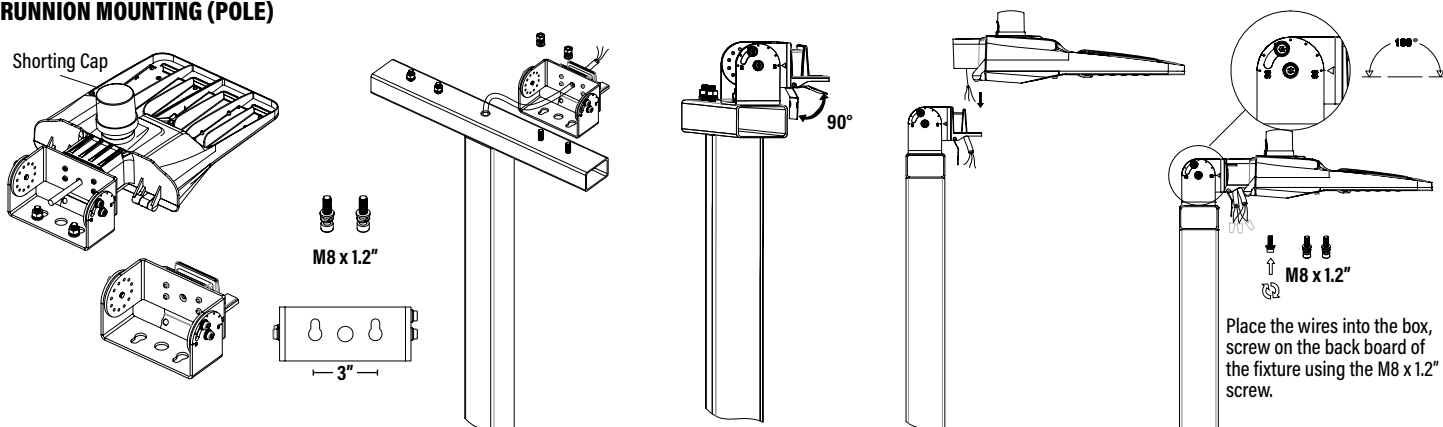

TRUNNION MOUNTING (WALL)

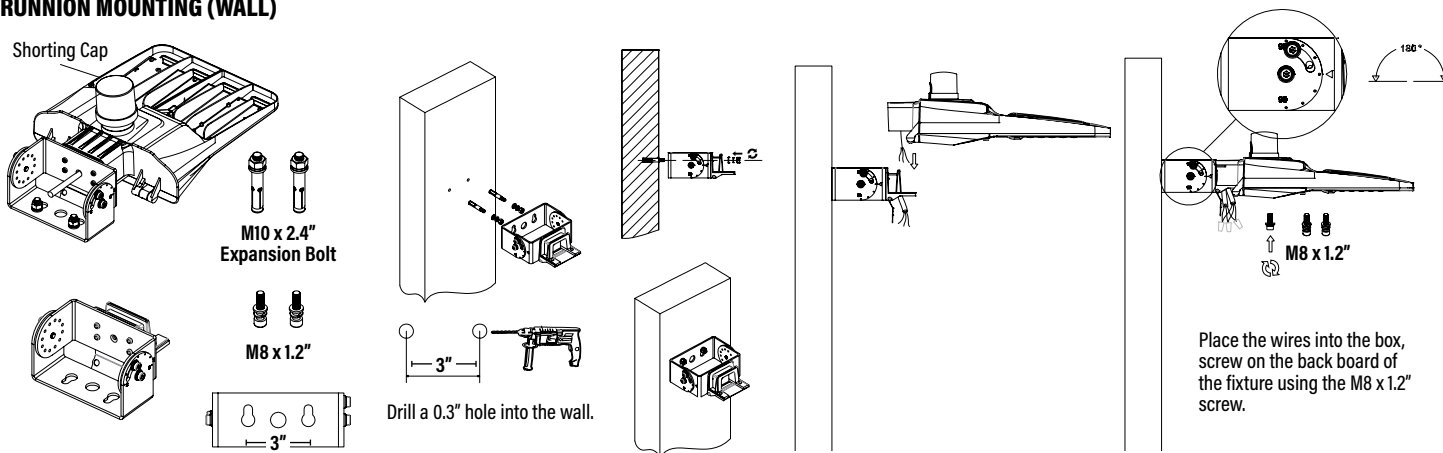

SLIP FITTER MOUNTING

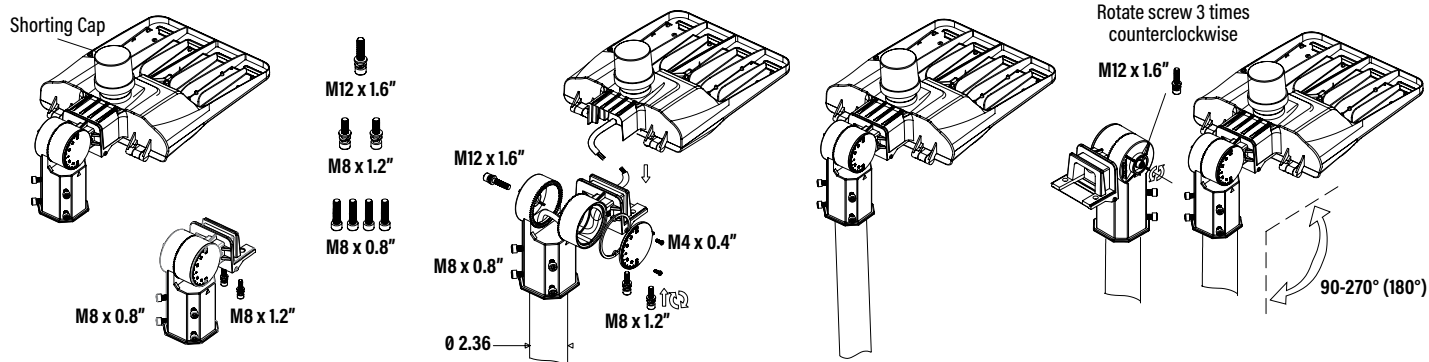

STEALTH™ AREA LIGHT - 100-277V

INSTALLATION INSTRUCTIONS

PQL
PREMIUM QUALITY LIGHTING®


INSTALLATION



**WARNING DISCONNECT POWER
BEFORE INSTALLING OR SERVICING.**

Product requires top-mounted shorting cap or optional twist-lock photocell installed to operate.

POLE MOUNTING

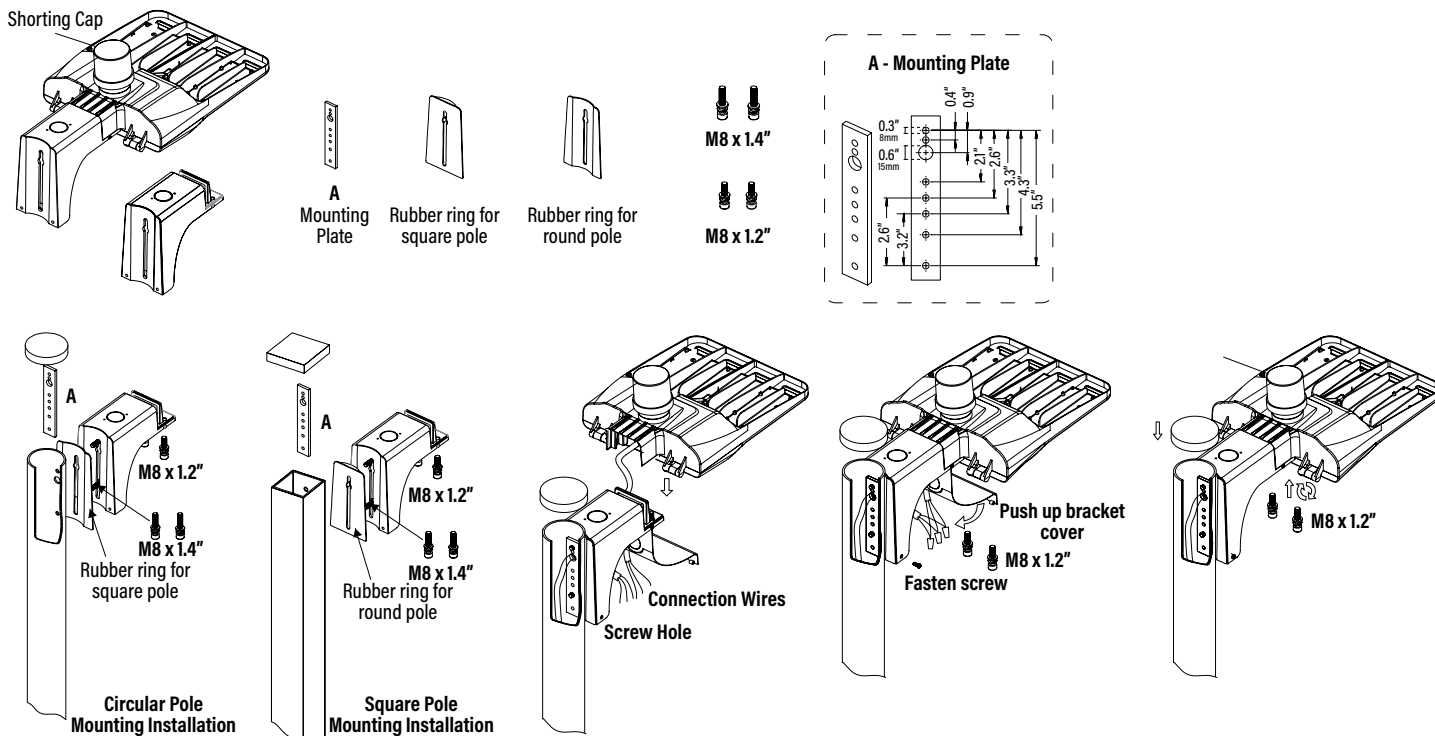

SENSOR INSTALLATION FOR POLE BRACKET

