



ELECTRICAL

WATTAGE

Item#: **BLW1UW22P140** LED 2X2 POWER-SELECT[™] BACK-LIT PANEL

2X2 LUMINARIES FOR AMBIENT LIGHTING OF INTERIOR COMMERCIAL SPACES

FEATURES

Power-Select[™] Backlit energy-efficient LED panels are like 3 fixtures in 1, and can provide the perfect balance of light in any application.

Adjustable Wattage (3 settings)

APPLICATION

Ideal for retrofitting inefficient fixtures in malls, hospitals, airports, offices, lobbies and other residential and commercial applications.


Wattage	20W / 25W / 30W	
Voltage	120-277V	
Current	30W @ 120V = 0.25A	
Power Factor	0.9	
Total Harmonic Distortion (THD)		
LIGHTING PERFORMANCE		
Lumens	2500 / 3125 / 3750	
Lumens Per Watt (LPW)	125	
Color Temperature (CCT)	4000K	
Color Rendering (CRI)	80	
R9 (Red Value)		
Beam Angle	120°	
Light Distribution	Type VS	
BUG Rating (Backlight, Uplight, and Glare)		
Dimmable Lighting Control	(Dimmable 0-10V, Range 10% - 100%	
ENVIRONMENT		
Operating Temperature	-4° ~ 122°F	
Suitable Location	DAMP	
Ingress Protection Rating	IP40	
LIFESPAN		
Average Life (Hours)	50,000	
Warranty (Years)	5	
COMPONENTS		
LED Light Source		
Driver		
CONSTRUCTION		
Housing	Aluminum	
Lens	Frosted	
Base / Power Supply	Hard Wired	
Finish	White	
QUALIFICATIONS		
Model Number	BLW1-U-W-22-P1-40	
Pending		

Item#: **BLW1UW22P140** LED 2X2 POWER-SELECT[™] BACK-LIT PANEL



DIMENSIONS (Inches)

Length	23.7"
Width	23.7"
leight	1.4″
/eight (Lbs)	
Product Sheet	VIEW
nstall Instructions	VIEW
nstall Instructions ES Download from Web Item	
	VIEW

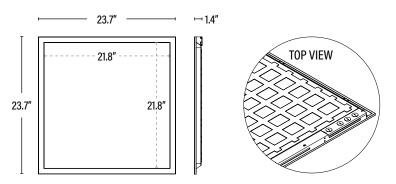

DACKACING

PACKAGING		UPC	DIMENSIONS (LxWxH)	GROSS WEIGHT (Lbs)
Master Carton	4	10811768023296	25.3" x 25.3" x 6.2"	
Individual Item	1	811768023299	N/A	
Country of Origin	China			
HS Tariff				

ORDERING

CODE	DESCRIPTION	CASE
BLW1UW22P140	BLP™ LED 2X2 POWER-SELECT™ PANEL/20-25-30W/40K/DIMM/120-277V	4
ACCESSORIES		
55128	2X2 FLANGE KIT FOR PANEL & TROFFER/WHT	1
55531	2X2 SURFACE MOUNTED KIT FOR LED BACK-LIT PANEL/WHT	1

55531	2X2 SURFACE MOUNTED KIT FOR LED BACK-LIT PANEL/WHT	1
55445	5FT SUSPENDED CABLE MOUNTING KIT FOR LED PANEL	100
55446	10FT SUSPENDED CABLE MOUNTING KIT FOR LED PANEL	100
55706	EMERGENCY PACK FOR LED BLP PANEL 8W/90 MIN	10
55393	MOUNTING BRACKET AND WIRE BOXES FOR EMERGENCY PACK FOR LED 2X2 OR 2X4 PANEL	20
55697	DUAL COLOR TAPE TEST BUTTON AND ADAPTOR FOR EMERGENCY BATTERY TROFFER OR PANEL	400
REPLACEME	ENT PARTS	
	REPLACEMENT LED DRIVER	1

ADDITIONAL INFORMATION:

- Default settings; 20W.

• The wattage may be adjusted by slide switches integrated into the driver, selection should be made prior to installation.

