SELECTABLE
WATTAGE

Item#: **BLW1UW24P140**
LED 2X4 POWER-SELECT™
BACK-LIT PANEL
2X4 LUMINARIES FOR AMBIENT LIGHTING OF INTERIOR COMMERCIAL SPACES

FEATURES
Power-Select™ Backlit energy-efficient LED panels are like 3 fixtures in 1, and can provide the perfect balance of light in any application.
· Adjustable Wattage (3 settings)

APPLICATION
Ideal for retrofitting inefficient fixtures in malls, hospitals, airports, offices, lobbies and other residential and commercial applications.

ELECTRICAL

Wattage	25W / 30W / 40W
Voltage	120-277V
Current	40W @ 120V = 0.33A
Power Factor	0.9
Total Harmonic Distortion (THD)	--

LIGHTING PERFORMANCE

Lumens	3125 / 3750 / 5000
Lumens Per Watt (LPW)	125
Color Temperature (CCT)	4000K
Color Rendering (CRI)	80
R9 (Red Value)	--
Beam Angle	120°
Light Distribution	Type VS
BUG Rating (Backlight, Uplight, and Glare)	--
Dimmable Lighting Control	*Dimmable* 0-10V, Range 10% - 100%

ENVIRONMENT

Operating Temperature	-4° ~ 122°F
Suitable Location	DAMP
Ingress Protection Rating	IP40

LIFESPAN

Average Life (Hours)	50,000
Warranty (Years)	**5**

COMPONENTS

LED Light Source	--
Driver	--

CONSTRUCTION

Housing	Aluminum
Lens	Frosted
Base / Power Supply	Hard Wired
Finish	White

QUALIFICATIONS

Model Number	BLW1-U-W-24-P1-40K
Pending	

Published lumens on LED products are approximate and may vary slightly. · Specifications are subject to change without notice.
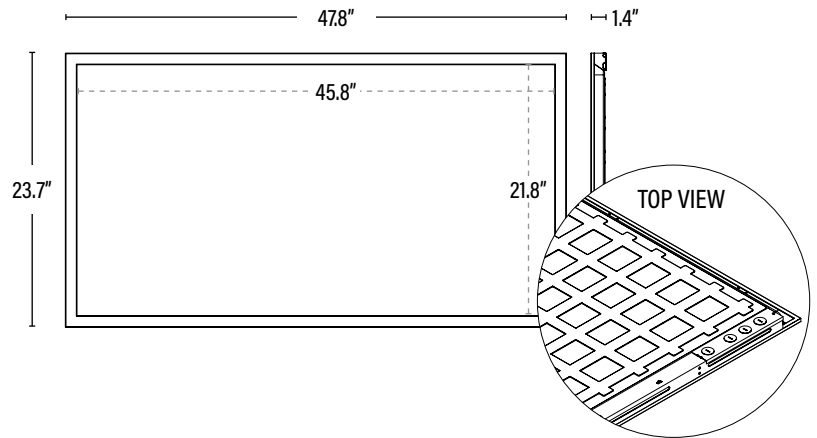
PREMIUM QUALITY LIGHTING® · Phone: 800-323-8107
© P.Q.L., Inc. · 2285 Ward Avenue · Simi Valley, CA 93065

www.PQLighting.com
Photos and drawings may not be to scale and are for general reference only.
Rev: 01/18/2024

Item#: BLW1UW24P140
LED 2X4 POWER-SELECT™ BACK-LIT PANEL

PQL
PREMIUM QUALITY LIGHTING®

DIMENSIONS (Inches)

Length	47.8"
Width	23.7"
Height	1.4"
Weight (Lbs)	--

SUPPORTING DOCUMENTS *(Grey = not available at this time.)*

Product Sheet	VIEW
Install Instructions	VIEW
IES Download from Web Item	VIEW
LM79	VIEW
LM80	VIEW

47.8" — 1.4"
45.8"
23.7"
21.8"
TOP VIEW

PACKAGING

		UPC	DIMENSIONS (LxWxH)	GROSS WEIGHT (Lbs)
Master Carton	4	10811768028888	49.3" x 25.6" x 6.2"	--
Individual Item	1	811768028881	N/A	--
Country of Origin	China			
HS Tariff	--			

ORDERING

CODE	DESCRIPTION	CASE
BLW1UW24P140	BLP™ LED 2X4 POWER-SELECT™ PANEL/25-30-40W/40K/DIMM/120-277V	4

ACCESSORIES

55129	2X4 FLANGE KIT FOR PANEL & TROFFER/WHT	1
55532	2X4 SURFACE MOUNTED KIT FOR LED BACK-LIT PANEL/WHT	1
55445	5FT SUSPENDED CABLE MOUNTING KIT FOR LED PANEL	100
55446	10FT SUSPENDED CABLE MOUNTING KIT FOR LED PANEL	100
55706	EMERGENCY PACK FOR LED BLP PANEL 8W/90 MIN	10
55393	MOUNTING BRACKET AND WIRE BOXES FOR EMERGENCY PACK FOR LED 2X2 OR 2X4 PANEL	20
55697	DUAL COLOR TAPE TEST BUTTON AND ADAPTOR FOR EMERGENCY BATTERY TROFFER OR PANEL	400

REPLACEMENT PARTS

--	REPLACEMENT LED DRIVER	1

ADDITIONAL INFORMATION:

- Default settings; 25W.
- The wattage may be adjusted by slide switches integrated into the driver, selection should be made prior to installation.

Wattage Switch

PREMIUM QUALITY LIGHTING® ▪ Phone: 800-323-8107
© **P.Q.L., Inc.** ▪ 2285 Ward Avenue ▪ Simi Valley, CA 93065

www.PQLighting.com
Photos and drawings may not be to scale and are for general reference only.
Rev: 01/18/2024